


PRECON ENVIRONMENTAL PRODUCTS, LLC
6868 FM 730 SOUTH
AZLE, TX 76020



817-448-9718 OFFICE
817-448-9886 FAX
frank@precon-tx.com
www.precon-tx.com

Specifications: 1. Concrete has design strength of 5,000psi @ 28 days. 2. Steel reinforcement: ASTM A-615, grade 60 ASTM A-497 welded wire fabric. 3. Designed for H2O loading. 4. CI Casting: ASTM A-48, class 30/35.

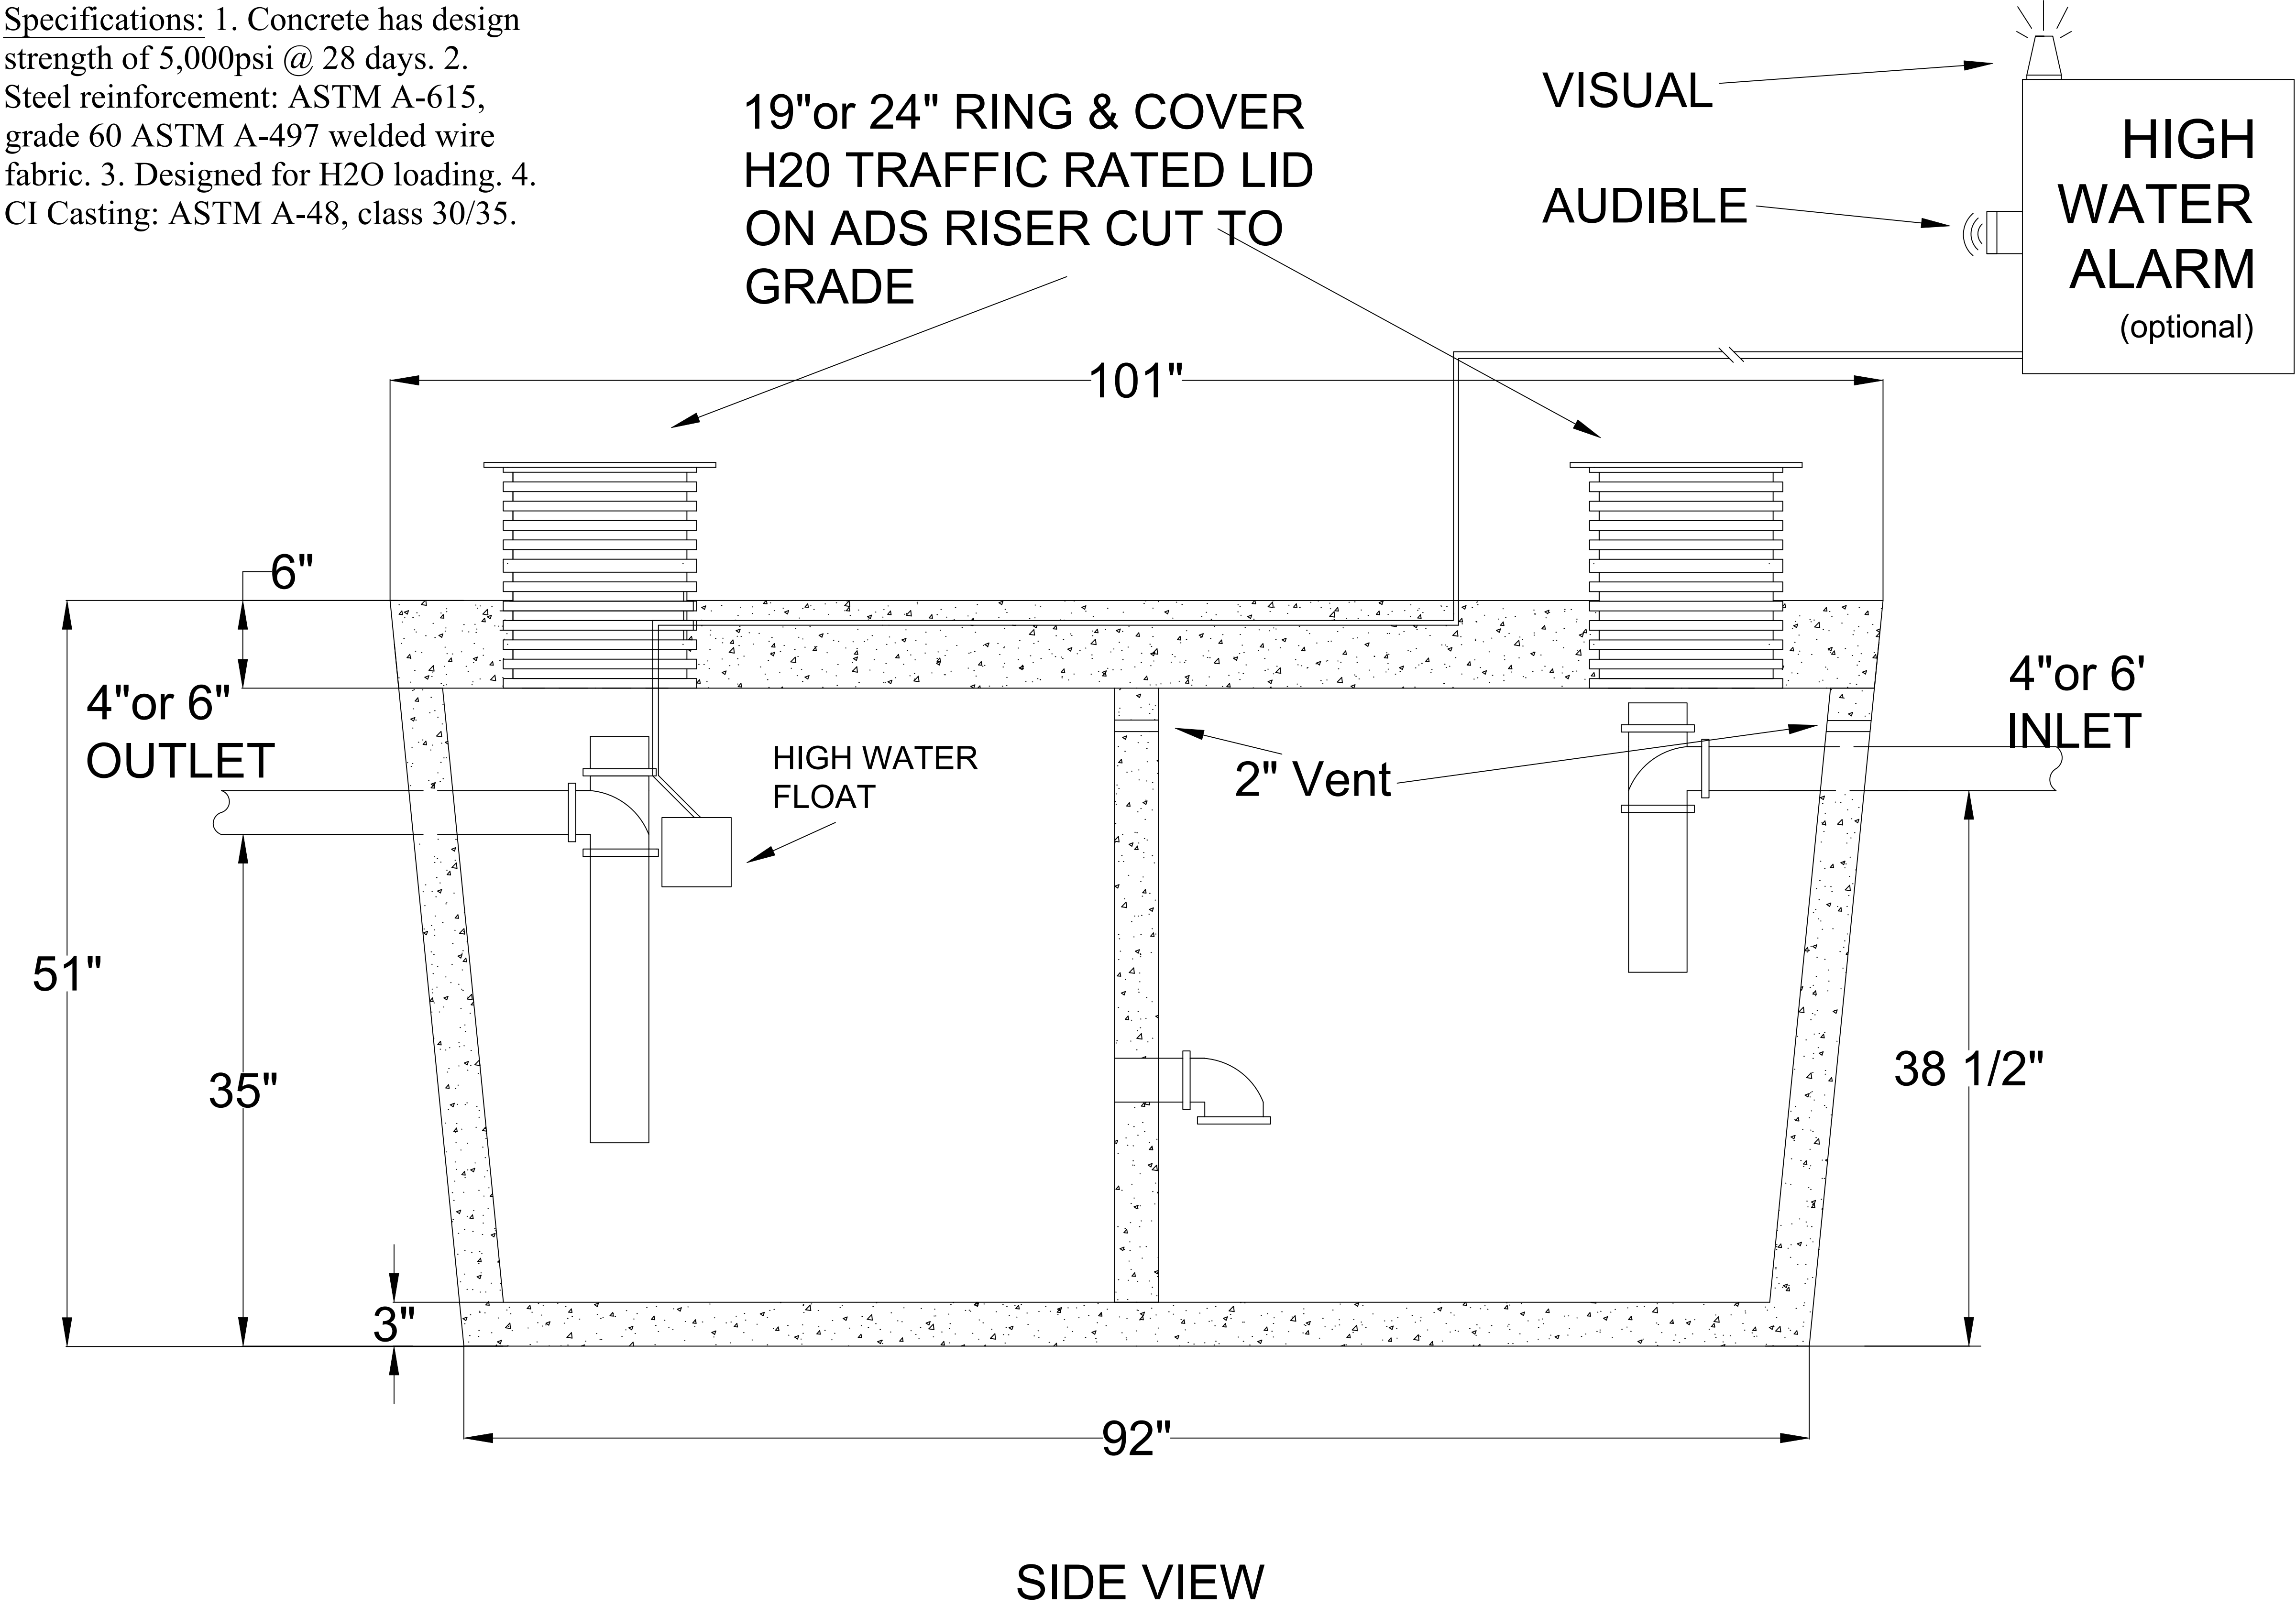

General Notes: 1. Unit comes with interior piping installed.
2. Inflow section of unit must be filled with at least 14.5"
of clear water prior to use.

1

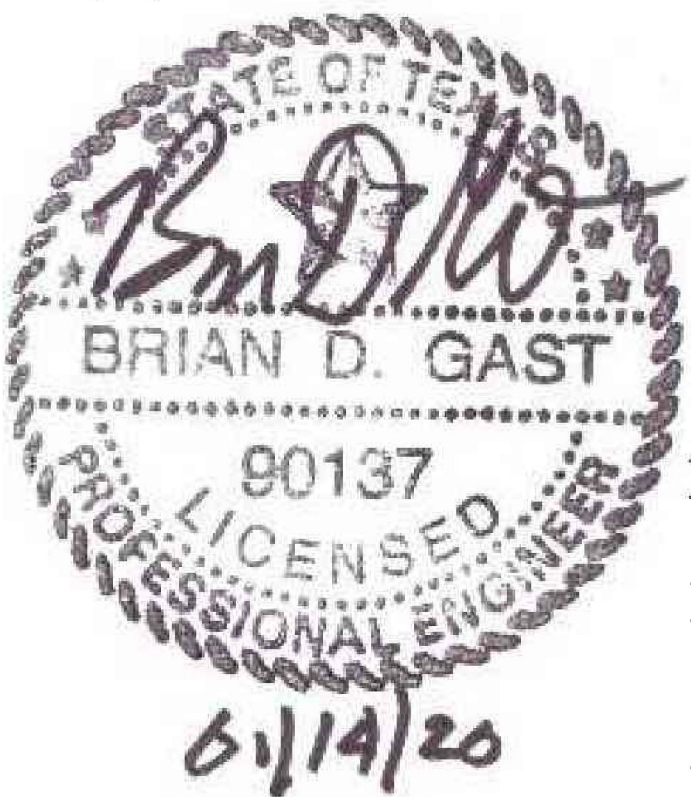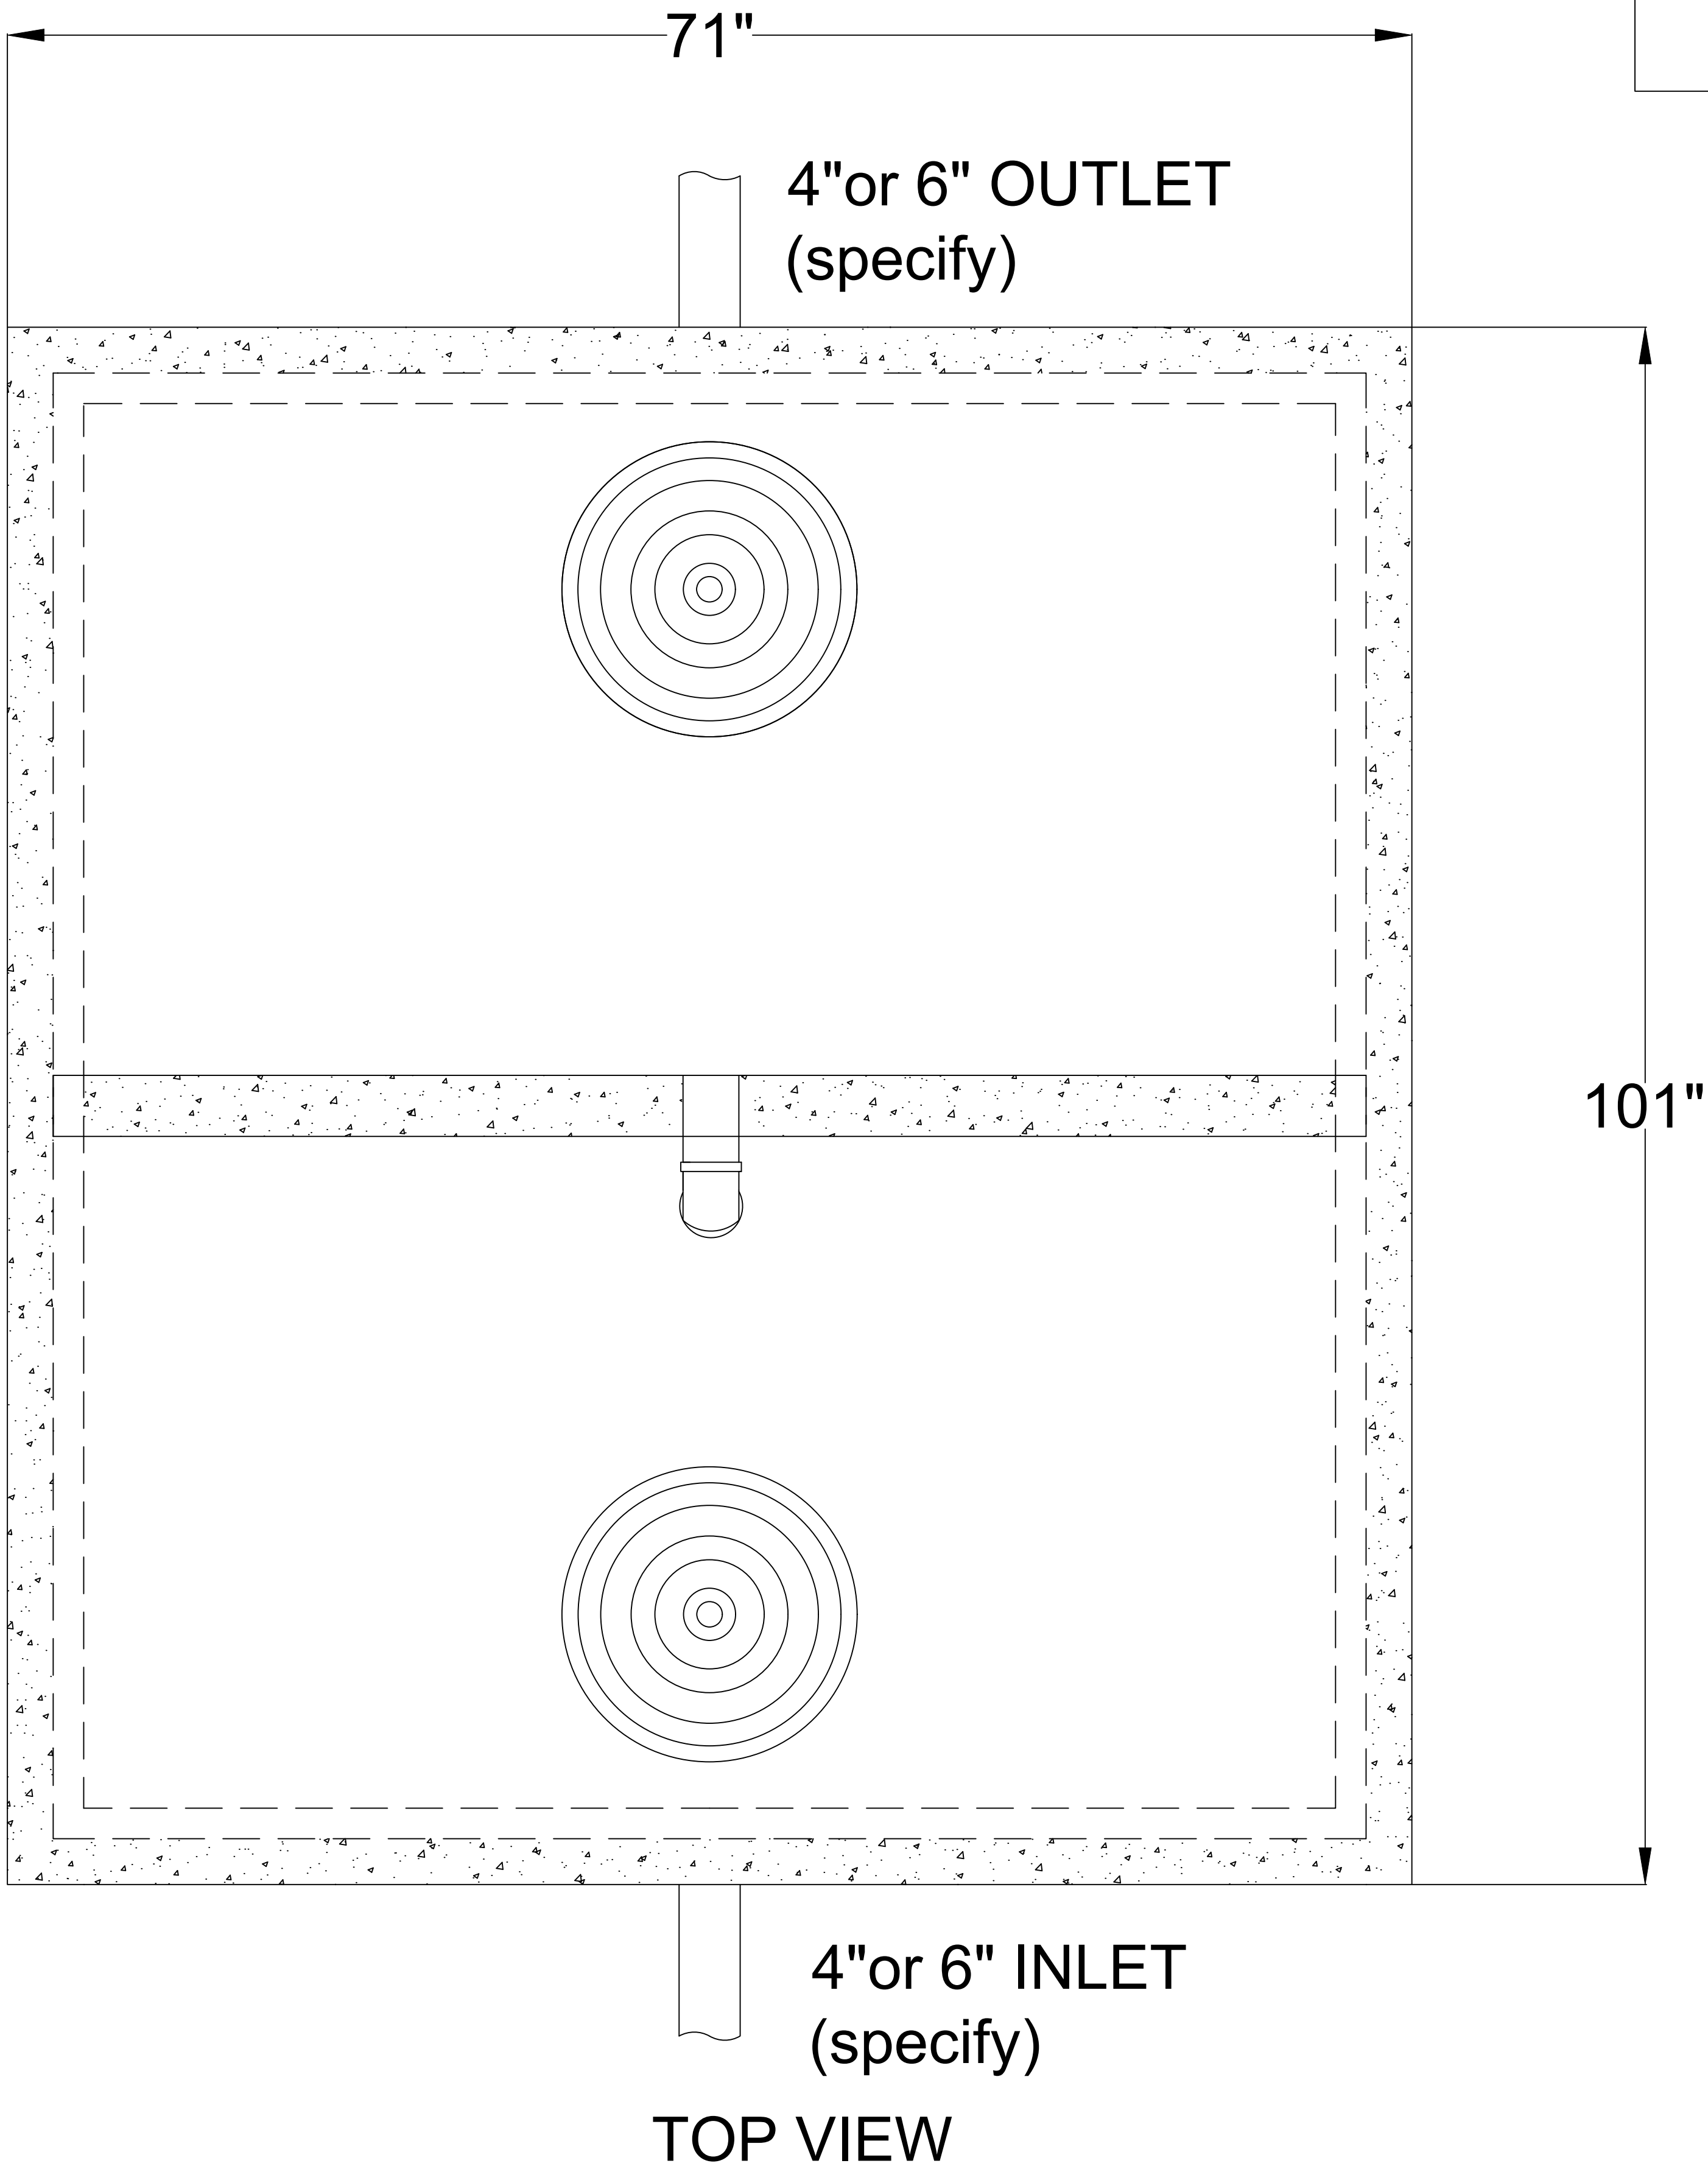

750solphw.dwg

FILE NAME:

APPROVED FOR PRODUCTION

DATE:

JOB TITLE:

AUTHORIZED BY

PRINT:

SIGN:

750 GALLON OIL/SAND
SEPARATOR
LOW PROFILE WITH
OPTIONAL HIGH WATER
ALARM