



3500 SERIES
1500 GALLON ARLINGTON GREASE TRAP
SINGLE BAFFLE

General Notes: 1. Unit comes with interior piping installed.
2. Inflow section of unit must be filled with at least 14.5"
of clear water prior to use.


Specifications: 1. Concrete has design
strength of 5,000psi @ 28 days. 2.
Steel reinforcement: ASTM A-615,
grade 60 ASTM A-497 welded wire
fabric. 3. Designed for H2O loading. 4.
CI Casting: ASTM A-48, class 30/35.

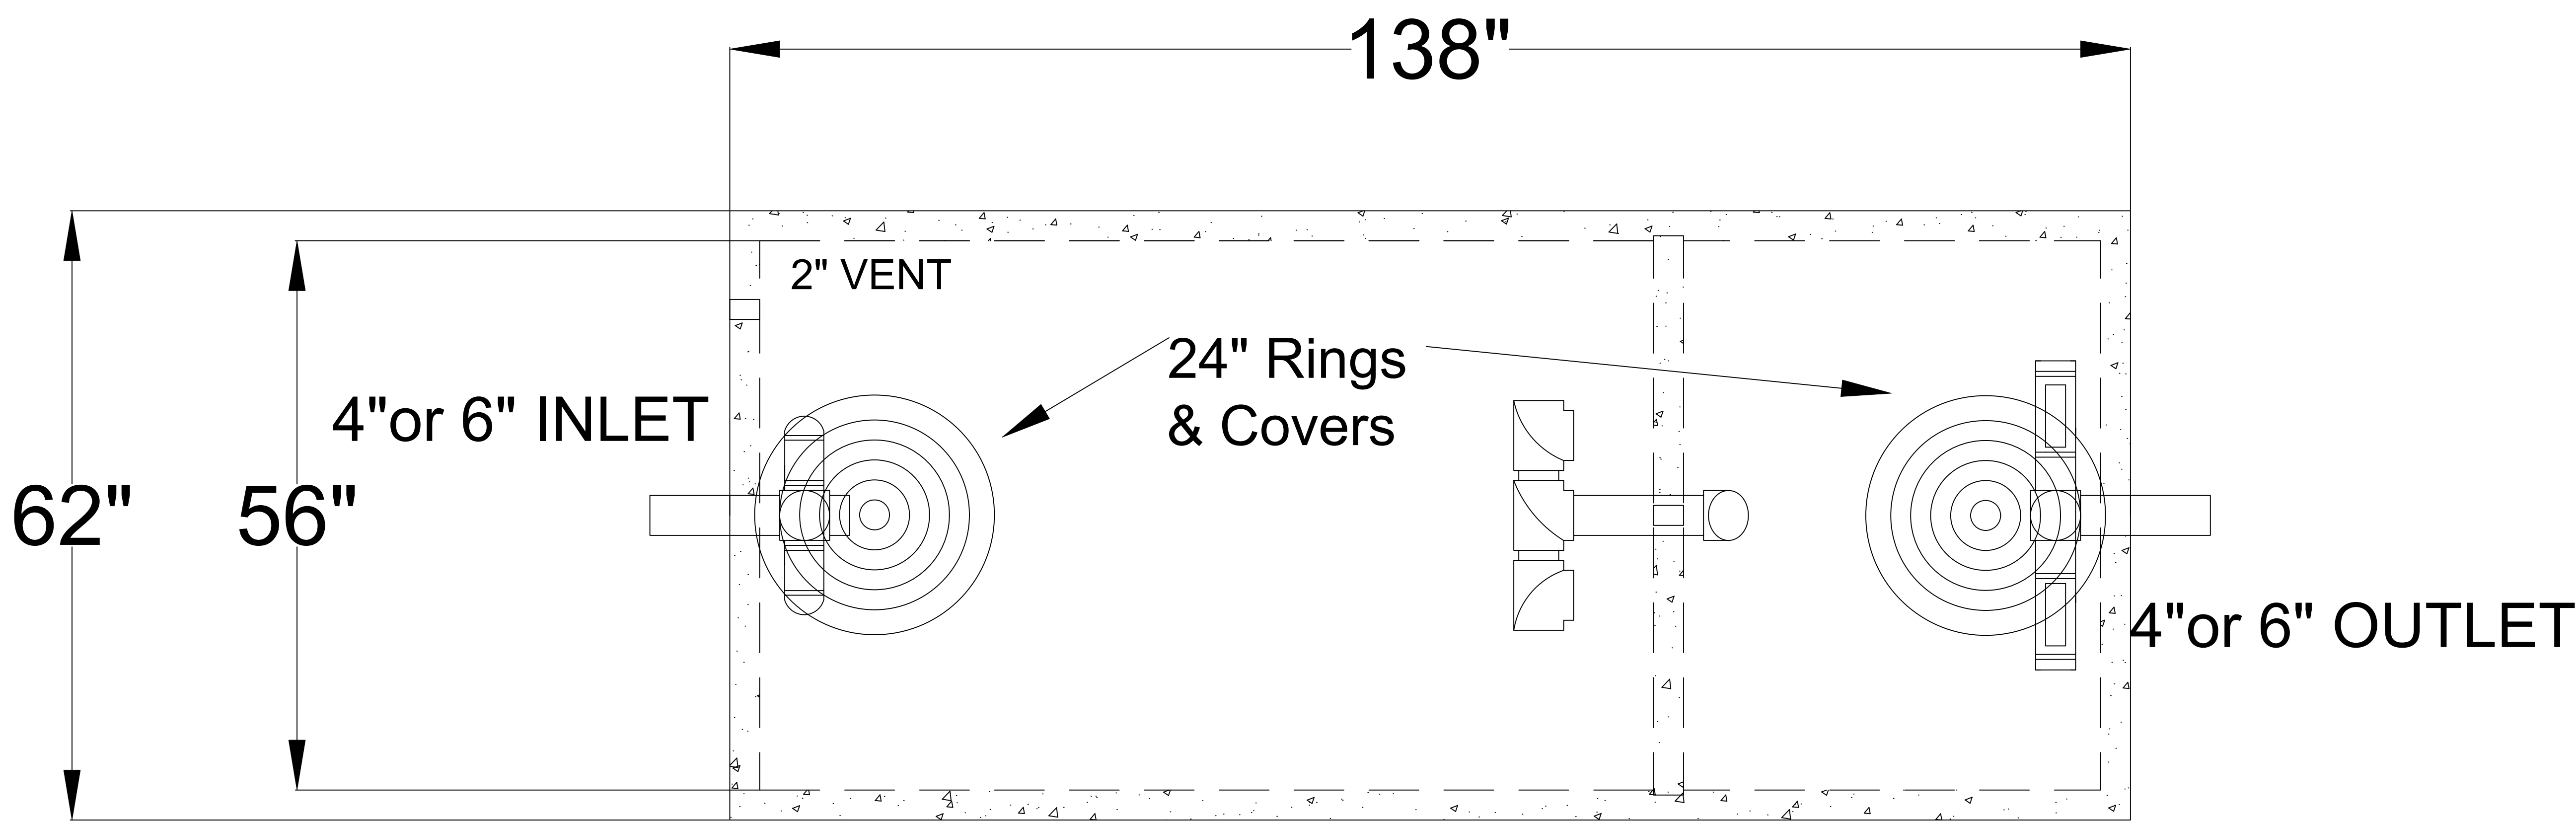

TOP VIEW

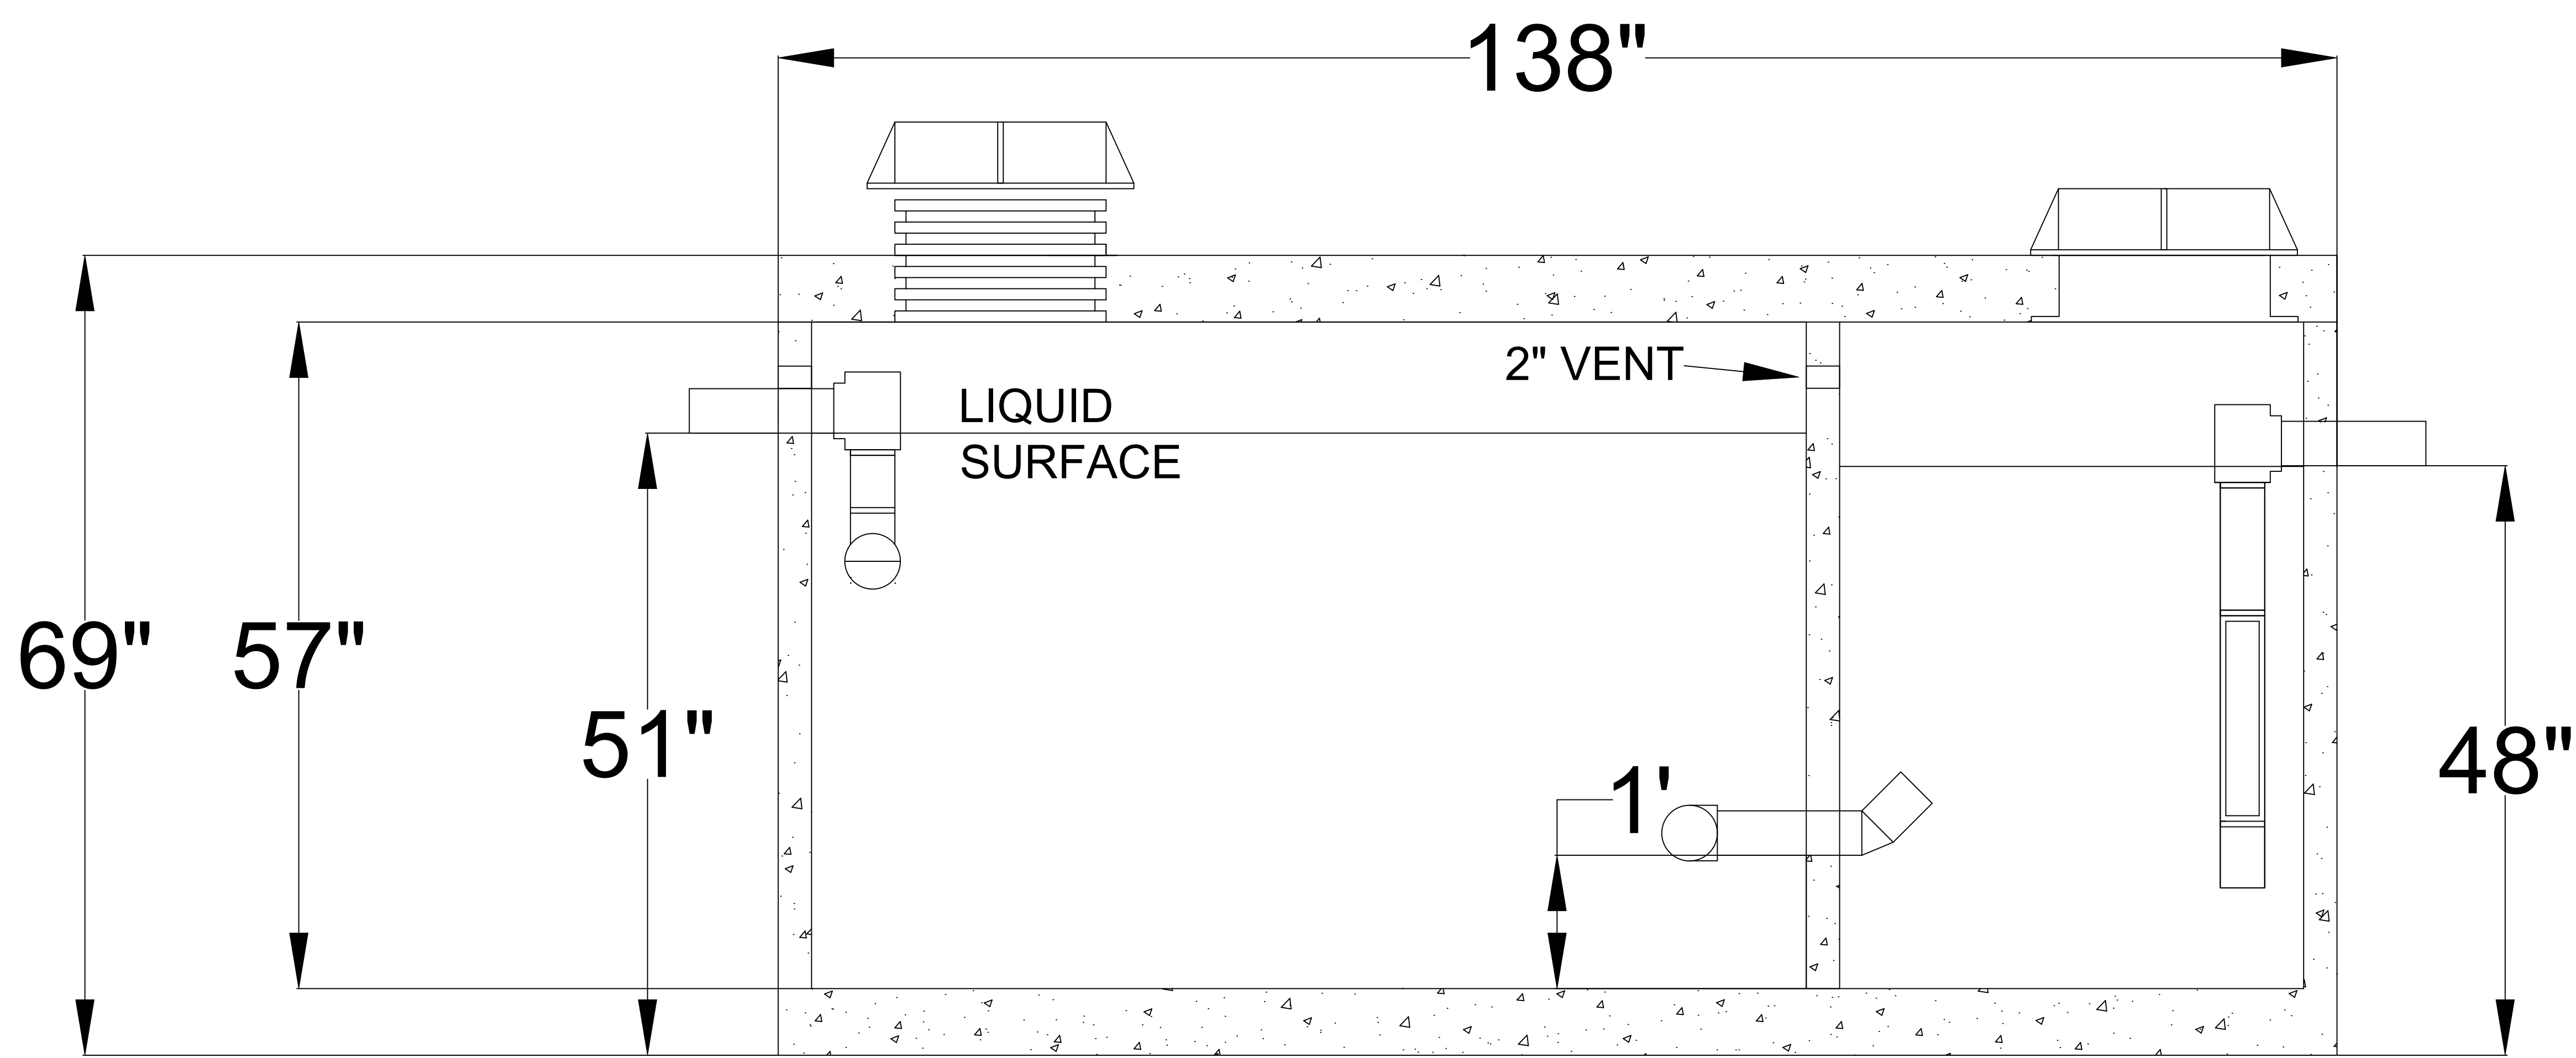

SIDE VIEW

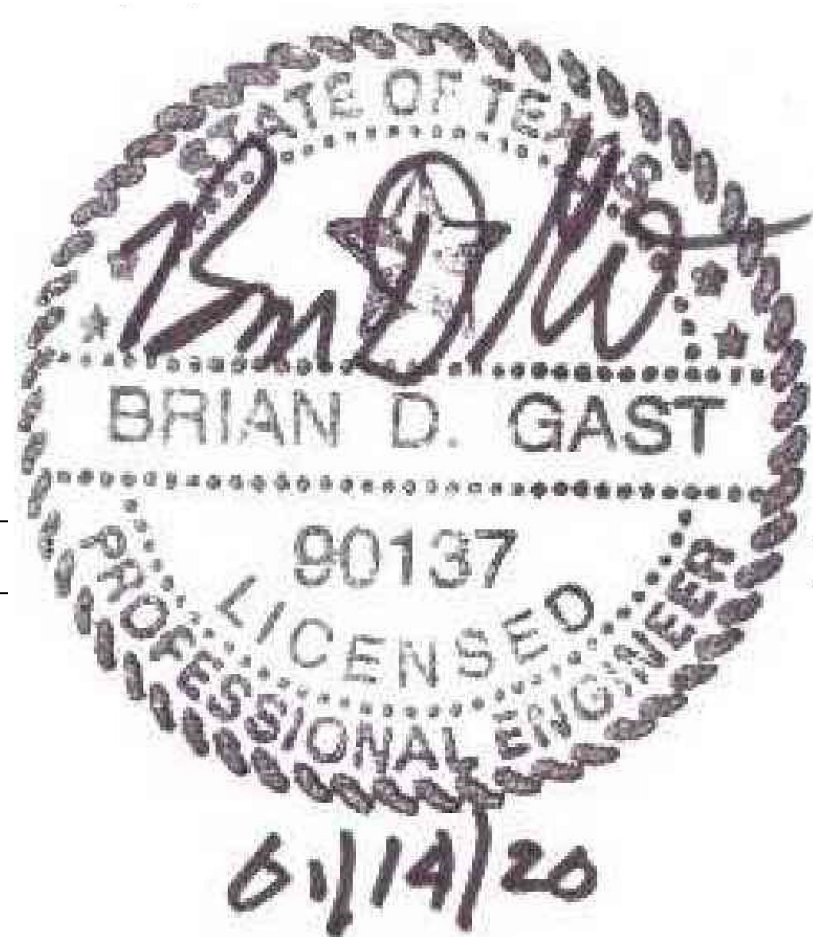

1500galgtsbARL.dwg

FILE NAME:

APPROVED FOR PRODUCTION

DATE:

JOB TITLE:

AUTHORIZED BY

PRINT:

SIGN: