


5700 SERIES
 6000 GALLON GREASE TRAP SINGLE BAFFLE


General Notes: 1. Unit comes with interior piping installed.
 2. Inflow section of unit must be filled with at least 14.5" of clear water prior to use.

Specifications: 1. Concrete has design strength of 5,000psi @ 28 days. 2. Steel reinforcement: ASTM A-615, grade 60 ASTM A-497 welded wire fabric. 3. Designed for H2O loading. 4. CI Casting: ASTM A-48, class 30/35.

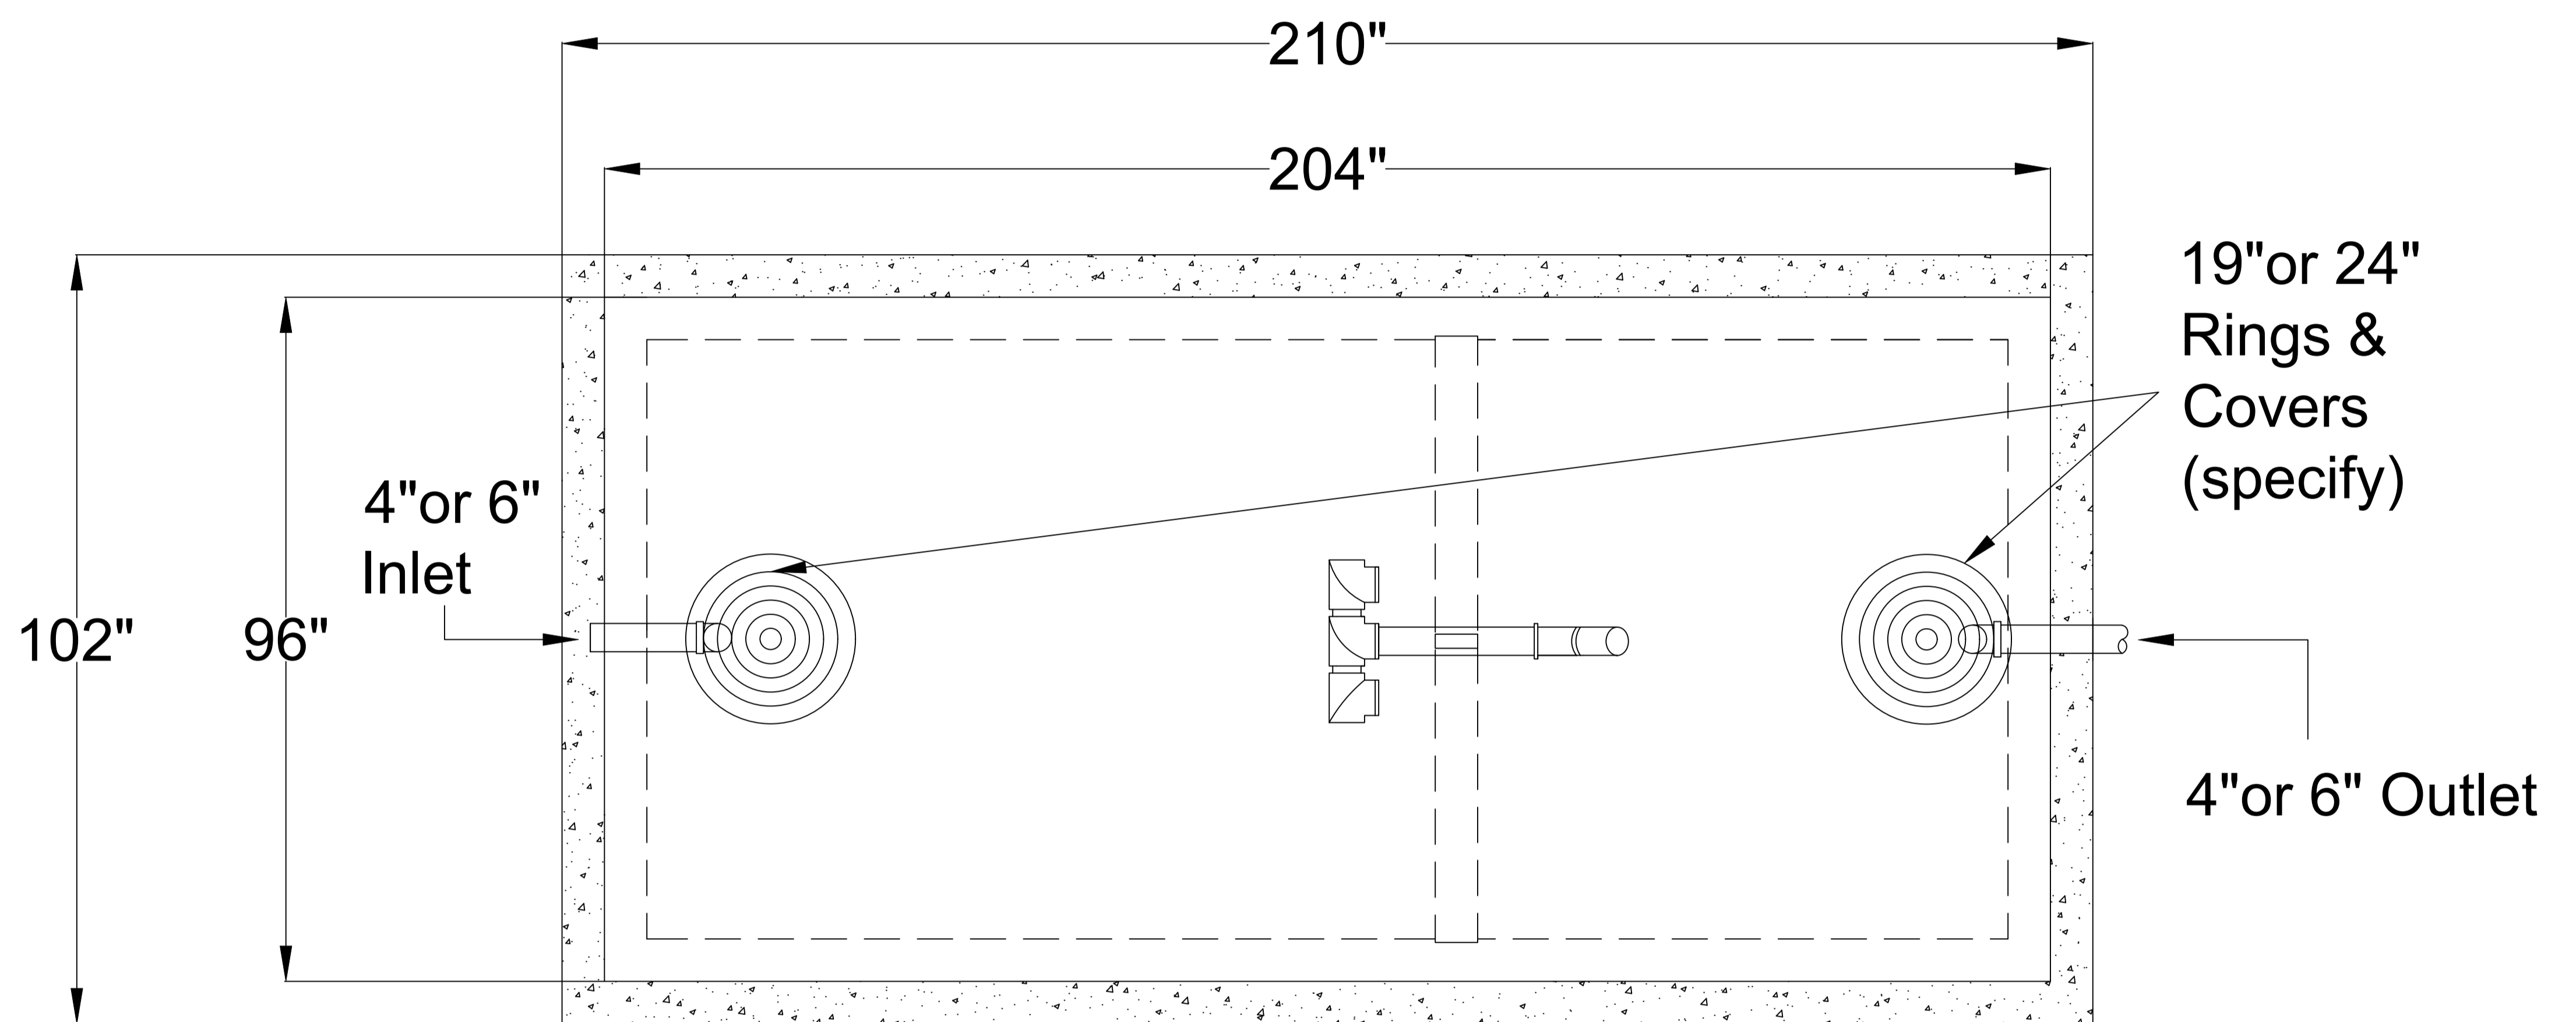


TOP VIEW

note: ADS riser extensions & couplers may be required to bring to grade.

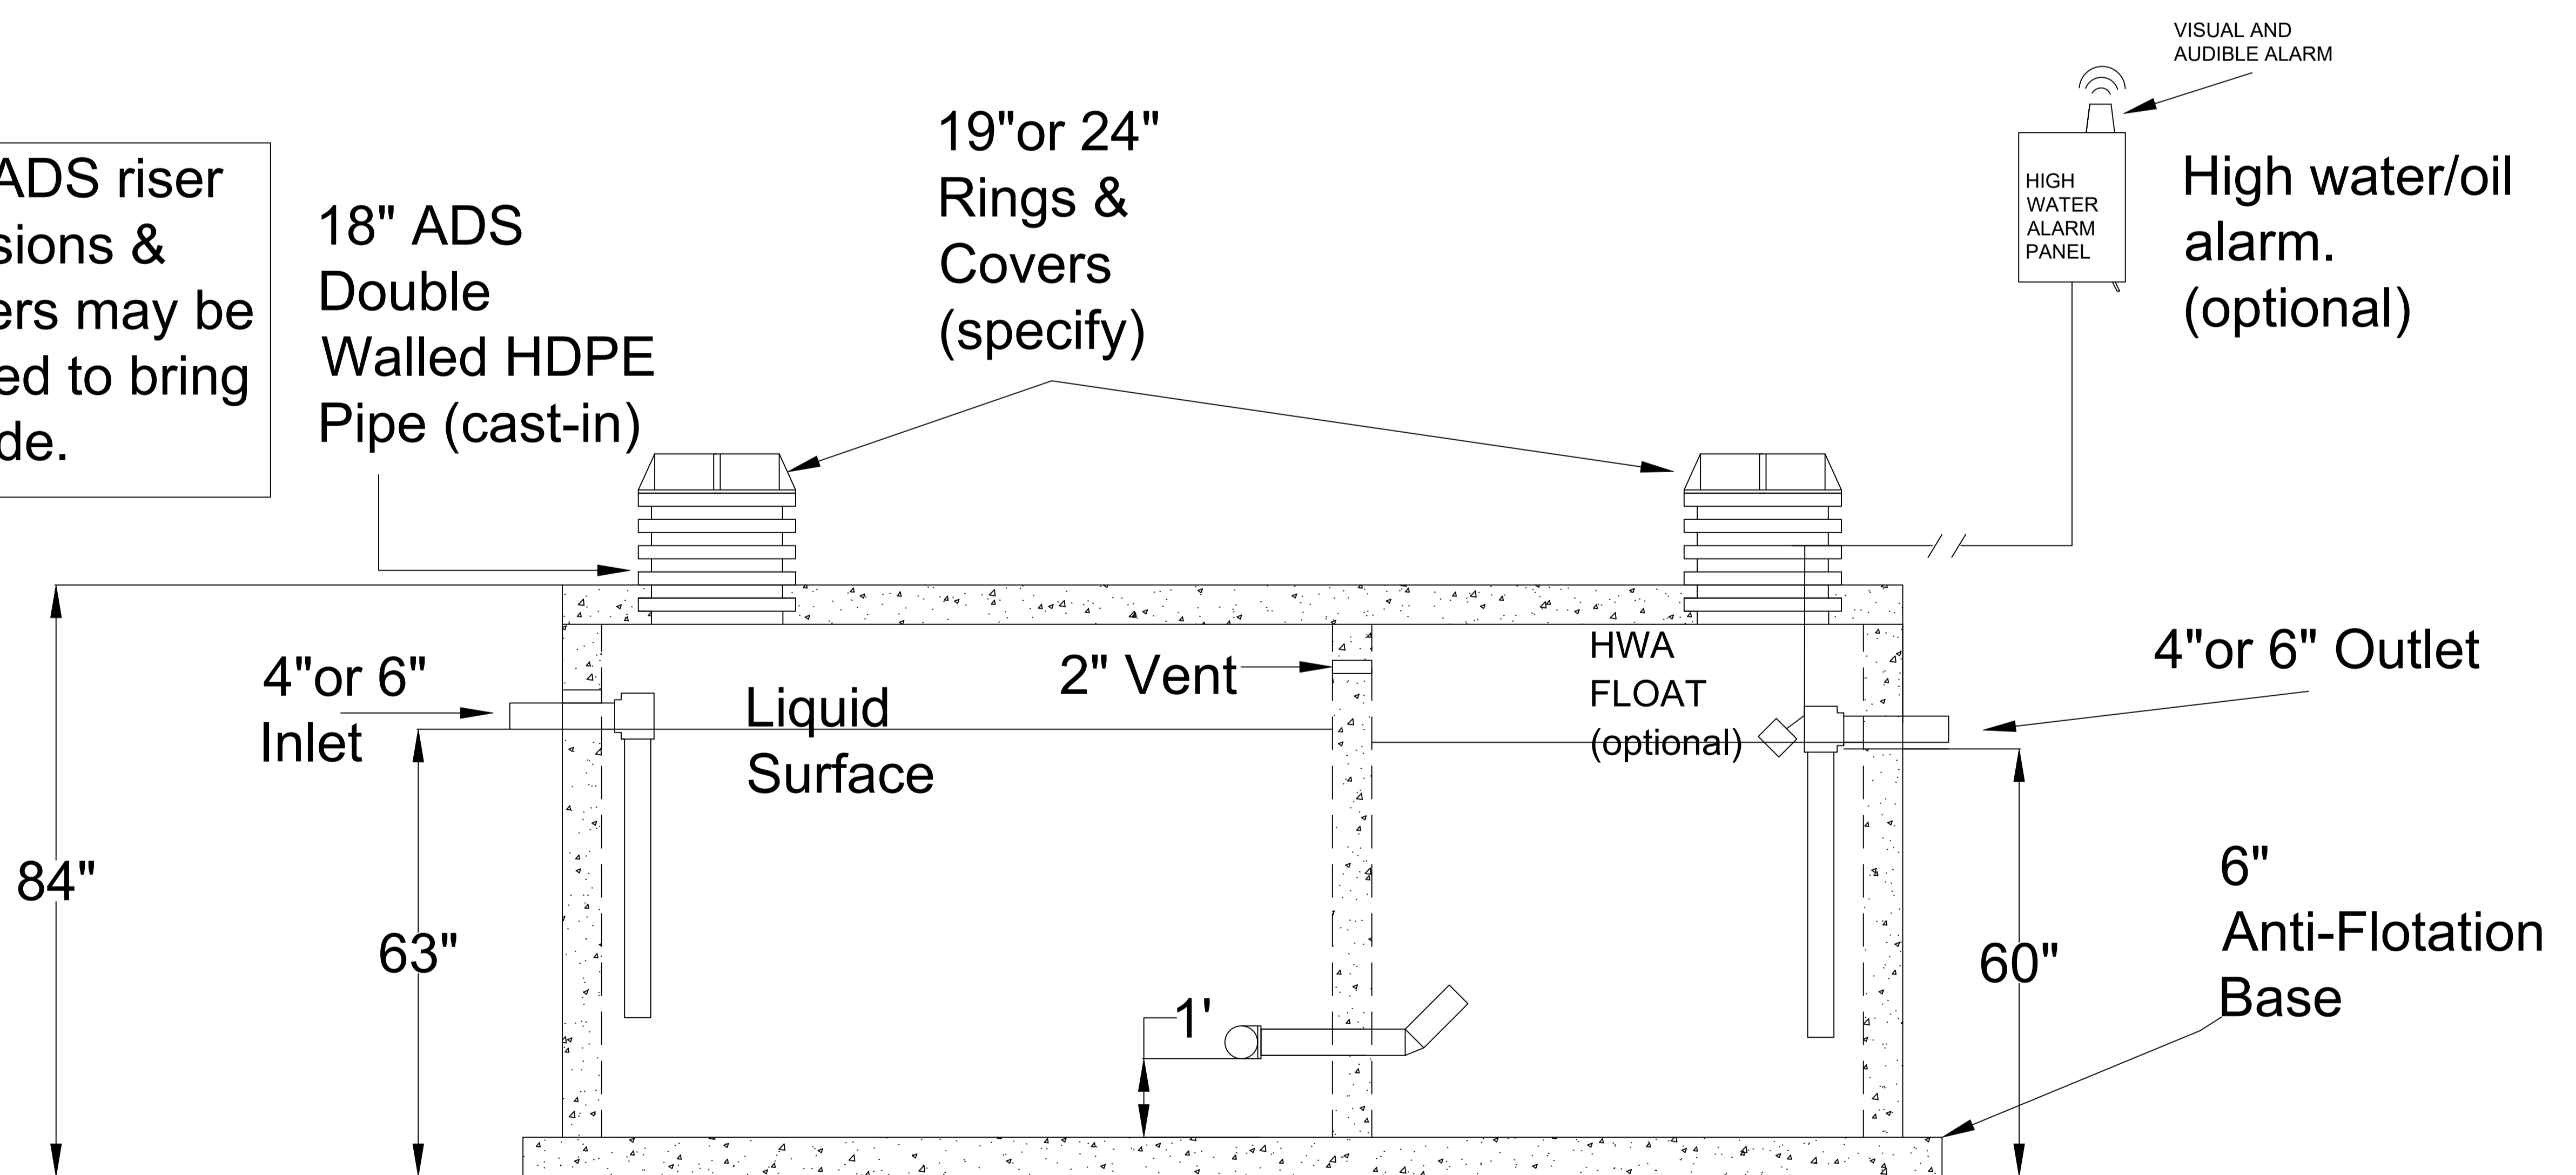

SIDE VIEW

Note: Be sure to account for the anti-flotation base length & width measurement when digging the hole.

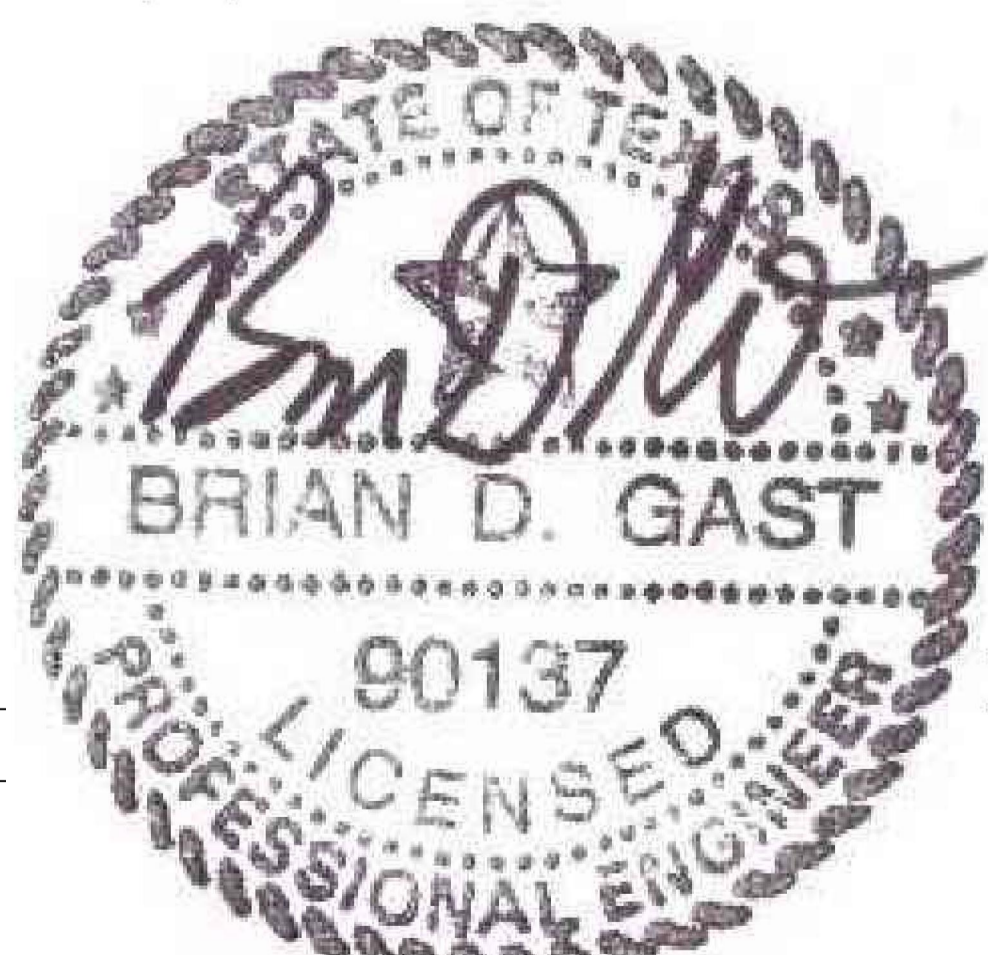

6/14/20

6000galgtsbhs.dwg

FILE NAME:

APPROVED FOR PRODUCTION	AUTHORIZED BY
DATE:	PRINT:
JOB TITLE:	SIGN: