



**2400 SERIES**  
 2500 GALLON OIL SAND SEPARATOR

General Notes: 1. Unit comes with interior piping installed.  
 2. Inflow section of unit must be filled with at least 14.5" of clear water prior to use.

Specifications: 1. Concrete has design strength of 5,000psi @ 28 days. 2. Steel reinforcement: ASTM A-615, grade 60 ASTM A-497 welded wire fabric. 3. Designed for H<sub>2</sub>O loading. 4. CI Casting: ASTM A-48, class 30/35.

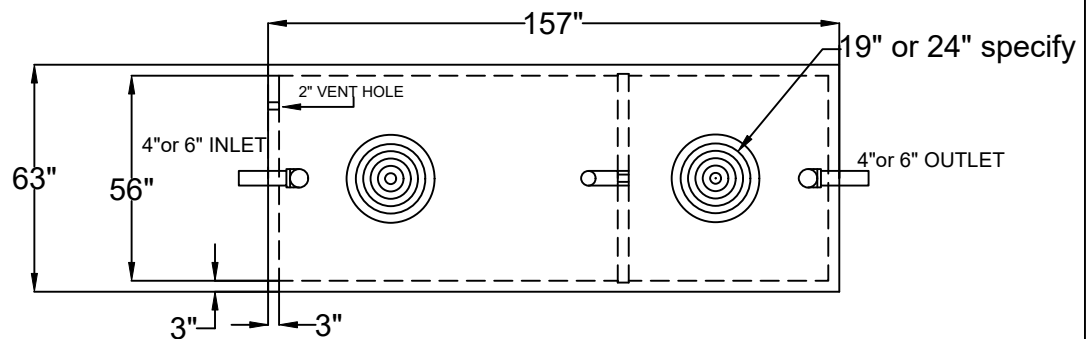

TOP VIEW

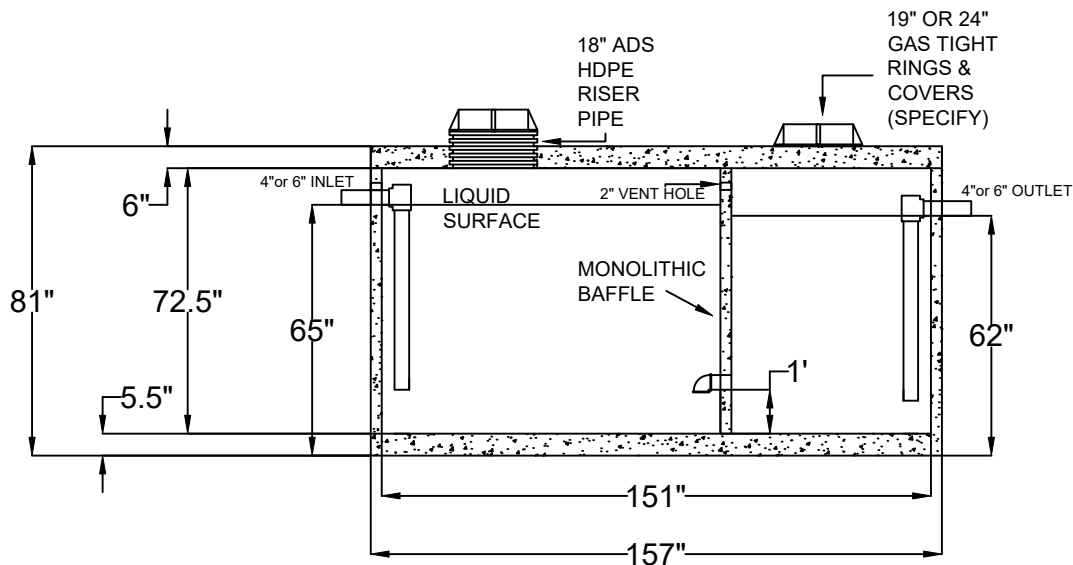

SIDE VIEW

|               |                         |               |
|---------------|-------------------------|---------------|
| 2500galos.dwg | APPROVED FOR PRODUCTION | AUTHORIZED BY |
|               | DATE:                   | PRINT:        |
|               | JOB TITLE:              | SIGN:         |
| FILE NAME:    |                         |               |