


Fiable Hydraulics Pvt Ltd.

Hydraulic Professionals

HYDRAULIC POWER PACKS AND CYLINDER MANUFACTURER

HYDRAULIC POWER UNITS

Applications

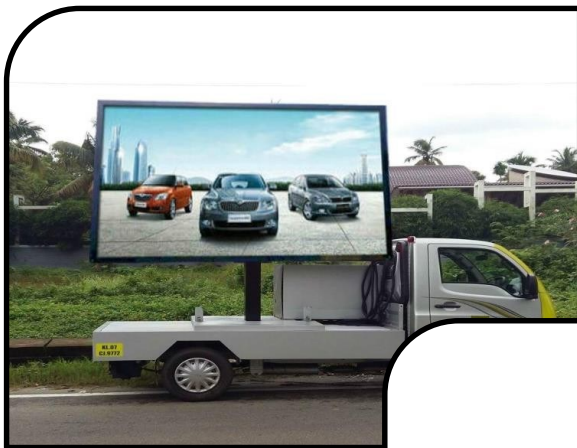

Address - Sector 10, MIDC Bhosari, Pimpri-Chinchwad, Maharashtra 411026.

www.fiablehydraulics.in



GARBAGE / CONSTRUCTION TIPPING



- DC Hydraulic Power Pack mountings are horizontal or vertical.
- Normally we set hydraulic relief valves at 160 bars, but hydraulic relief valves are adjustable from 50 to 230 bars, as standard for each mini hydraulic power pack.
- DC hydraulic power pack flow range is from 3L/min up to 15L/max.
- The standard size for the hydraulic valve manifold oil port's thread size is 3/8"BSPP.
- Electric control system: two buttons remote with 4 meters cables.

NO.	DESCRIPTION	PRODUCT
1.	HPU-12V DC, 1.6Kw Single Acting with 8ltr Round Tank and Wire Remote	
2.	HPU-24V DC, 2.2Kw Single Acting with 8ltr Round Tank and Wire Remote	
3.	HPU-12V DC, 1.6Kw Double Acting with 8ltr Round Tank and Wire Remote	
4.	HPU-24V DC, 2.2Kw Double Acting with 8ltr Tank and Wire Remote	





FIABLE PRODUCTS



ADVERTISEMENT VEHICLE



- DC Hydraulic Power Pack mountings are horizontal or vertical.
- Normally we set hydraulic relief valves at 160 bars, but hydraulic relief valves are adjustable from 50 to 230 bars, as standard for each mini hydraulic power pack.
- DC hydraulic power pack flow range is from 3L/min up to 15L/max.
- The standard size for the hydraulic valve manifold oil port's thread size is 3/8"BSPP.
- Electric control system: two buttons remote with 4 meters cables.

NO.	DESCRIPTION	PRODUCT
1.	HPU-12V DC, 1.6Kw Single Acting with 8ltr Round Tank and Wire Remote	
2.	HPU-24V DC, 2.2Kw Single Acting with 8ltr Round Tank and Wire Remote	
3.	HPU-12V DC, 1.6kw Double Acting with 8ltr Round Tank and Wire Remote	
4.	HPU-24V DC, 2.2Kw Double Acting with 8ltr Tank and Wire Remote	





FLAT BED TRAILER OUTRIDGERS



- DC Hydraulic Power Pack mountings are horizontal or vertical.
- Normally we set hydraulic relief valves at 160 bars, but hydraulic relief valves are adjustable from 50 to 230 bars, as standard for each mini hydraulic power pack.
- DC hydraulic power pack flow range is from 3L/min up to 15L/max.
- The standard size for the hydraulic valve manifold oil port's thread size is 3/8"BSPP.

NO.	DESCRIPTION	PRODUCT
1.	HPU-12V DC, 1.6Kw with 8ltr Round Tank, Relief Valve and Check Valve	
2.	HPU-24V DC, 2.2Kw with 30ltr Tank, Relief Valve and Check Valve	
3.	HPU-24V DC, 3kw with 30ltr Tank, Relief Valve and Check Valve	






CHASIS CARRIER



- DC Hydraulic Power Pack mountings are horizontal or vertical.
- Normally we set hydraulic relief valves at 160 bars, but hydraulic relief valves are adjustable from 50 to 230 bars, as standard for each mini hydraulic power pack.
- DC hydraulic power pack flow range is from 3L/min up to 15L/max.
- The standard size for the hydraulic valve manifold oil port's thread size is 3/8"BSPP.

NO.	DESCRIPTION	PRODUCT
1.	HPU-12V DC, 1.6Kw with 8ltr Round Tank, Relief Valve and Check Valve	
2.	HPU-24V DC, 2.2Kw with 30ltr Tank, Relief Valve and Check Valve	
3.	HPU-24V DC, 3kw with 30ltr Tank, Relief Valve and Check Valve	





TAIL GATE



- DC Hydraulic Power Pack mountings are horizontal or vertical.
- Normally we set hydraulic relief valves at 160 bars, but hydraulic relief valves are adjustable from 50 to 230 bars, as standard for each mini hydraulic power pack.
- DC hydraulic power pack flow range is from 3L/min up to 15L/max.
- The standard size for the hydraulic valve manifold oil port's thread size is 3/8"BSPP.

NO.	DESCRIPTION	PRODUCT
1.	HPU-12V DC, 1.6Kw with 8ltr Round Tank, Relief Valve and Check Valve	
2.	HPU-24V DC, 2.2Kw with 30ltr Tank, Relief Valve and Check Valve	
3.	HPU-24V DC, 3kW with 30ltr Tank, Relief Valve and Check Valve	








TOWING VANS



- DC Hydraulic Power Pack mountings are horizontal or vertical.
- Normally we set hydraulic relief valves at 160 bars, but hydraulic relief valves are adjustable from 50 to 230 bars, as standard for each mini hydraulic power pack.
- DC hydraulic power pack flow range is from 3L/min up to 15L/max.
- The standard size for the hydraulic valve manifold oil port's thread size is 3/8"BSPP.

NO.	DESCRIPTION	PRODUCT
1.	HPU-12V DC, 1.6Kw with 8ltr Round Tank, Relief Valve and Check Valve	
2.	HPU-24V DC, 2.2Kw with 30ltr Tank, Relief Valve and Check Valve	
3.	HPU-24V DC, 3kW with 30ltr Tank, Relief Valve and Check Valve	





COLUMN LIFT



- DC Hydraulic Power Pack mountings are horizontal or vertical.
- Normally we set hydraulic relief valves at 160 bars, but hydraulic relief valves are adjustable from 50 to 230 bars, as standard for each mini hydraulic power pack.
- DC hydraulic power pack flow range is from 3L/min up to 15L/max.
- The standard size for the hydraulic valve manifold oil port's thread size is 3/8"BSPP.

NO.	DESCRIPTION	PRODUCT
1.	HPU-12V DC, 1.6kW Dual Double Acting and Hand Pump with 15ltr Tank in Enclosed Container for Two Hydraulic Cylinders	
2.	HPU-24V DC, 2.2 kW Dual Double Acting and Hand Pump with 15ltr Tank in Enclosed Container for Two Hydraulic Cylinders	





SCISSOR LIFT



- AC Hydraulic Power Pack mountings are horizontal or vertical.
- Normally we set hydraulic relief valves at 160 bars, but hydraulic relief valves are adjustable from 50 to 230 bars, as standard for each mini hydraulic power pack.
- AC hydraulic power pack flow range is from 3L/min up to 15L/max.
- The standard size for the hydraulic valve manifold oil port's thread size is 3/8"BSPP.

NO.	DESCRIPTION	PRODUCT
1.	3 HP, 3 Phase Single Acting 25ltr Tank	
2.	3 HP, 1 Phase Single Acting 25ltr Tank	
3.	5 HP, 3 Phase Single Acting 25ltr Tank	
4.	3 HP, 3 Phase Single Acting with 25ltr Tank and Lift Valve Block	





PARKING LIFT



- AC Hydraulic Power Pack mountings are horizontal or vertical.
- Normally we set hydraulic relief valves at 160 bars, but hydraulic relief valves are adjustable from 50 to 230 bars, as standard for each mini hydraulic power pack.
- AC hydraulic power pack flow range is from 3L/min up to 15L/max.
- The standard size for the hydraulic valve manifold oil port's thread size is 3/8"BSPP.

NO.	DESCRIPTION	PRODUCT
1.	3 HP, 3 Phase Single Acting 25ltr Tank	
2.	3 HP, 1 Phase Single Acting 25ltr Tank	
3.	5 HP, 3 Phase Single Acting 25ltr Tank	
4.	3 HP, 3 Phase Single Acting with 25ltr Tank and Lift Valve Block	





GOODS LIFT



- AC Hydraulic Power Pack mountings are horizontal or vertical.
- Normally we set hydraulic relief valves at 160 bars, but hydraulic relief valves are adjustable from 50 to 230 bars, as standard for each mini hydraulic power pack.
- AC hydraulic power pack flow range is from 3L/min up to 15L/max.
- The standard size for the hydraulic valve manifold oil port's thread size is 3/8"BSPP.

NO.	DESCRIPTION	PRODUCT
1.	3 HP, 3 Phase Single Acting 25ltr Tank	
2.	3 HP, 1 Phase Single Acting 25ltr Tank	
3.	5 HP, 3 Phase Single Acting 25ltr Tank	
4.	3 HP, 3 Phase Single Acting with 25ltr Tank and Lift Valve Block	








DOCK LEVELLER



- AC Hydraulic Power Pack mountings are horizontal or vertical.
- Normally we set hydraulic relief valves at 160 bars, but hydraulic relief valves are adjustable from 50 to 230 bars, as standard for each mini hydraulic power pack.
- AC hydraulic power pack flow range is from 3L/min up to 15L/max.
- The standard size for the hydraulic valve manifold oil port's thread size is 3/8"BSPP.

NO.	DESCRIPTION	PRODUCT
1.	1HP, 3 Phase, 3 Coil Suitable For Two Single Acting Cylinder One For Lip Another for Main Dock with 6ltr Tank	
2.	1HP, 3 Phase, 3 Coil Suitable For Two Double Acting Cylinder One For Lip Another for Main Dock with 6ltr Tank	
3.	1HP, 3 Phase, 3 Coil Suitable For Two Hydraulic Cylinder One For Lip (Double Acting) Another for Main Dock (Single Acting) with 6ltr Tank	



Products we offer:

- Hydraulic Power Pack
- Hydraulic Cylinders
- Hydraulic Valves
- Hydraulic Pumps
- Hydraulic Motors
- Hydraulic Fittings



Fiable Hydraulics

About Us :

FIABLE HYDRAULICS PVT LTD - Top Hydraulic Power Packs & Hydraulic Cylinders Manufacturer

Looking for reliable hydraulic power packs manufacturers? Fiable Hydraulics Pvt Ltd offers high-quality hydraulic power packs and hydraulic cylinders for various industrial applications.

FIABLE HYDRAULICS PVT. LTD is a Pune's well known company in the field of hydraulics. We are backed by a decade of experience in field of hydraulics, We have a state of art manufacturing facility of hydraulic fittings, hydraulic power units & hydraulic cylinders situated in BHOSARI, PUNE.

We have also developed compact AC & DC hydraulic power units and hydraulic cylinders widely used in garbage tippers.

We provide a one stop solutions for all hydraulic components needs of our customers.

Fiable Hydraulics Pvt Ltd

Sector 10, MIDC Bhosari, Pimpri-Chinchwad, Pune, Maharashtra, Pin-411026.

fiablehydraulics@gmail.com / [+91 88065 52786](tel:+918806552786)