


30BC

COBALT BLUE NITRILE•POWDER FREE

30BC Disposable Cobalt Blue Nitrile Gloves offers excellent grip and high tolerance to chemicals. Its bright contrasting colour is fantastic to be used in food handling. It's a great all-rounder glove for various applications.

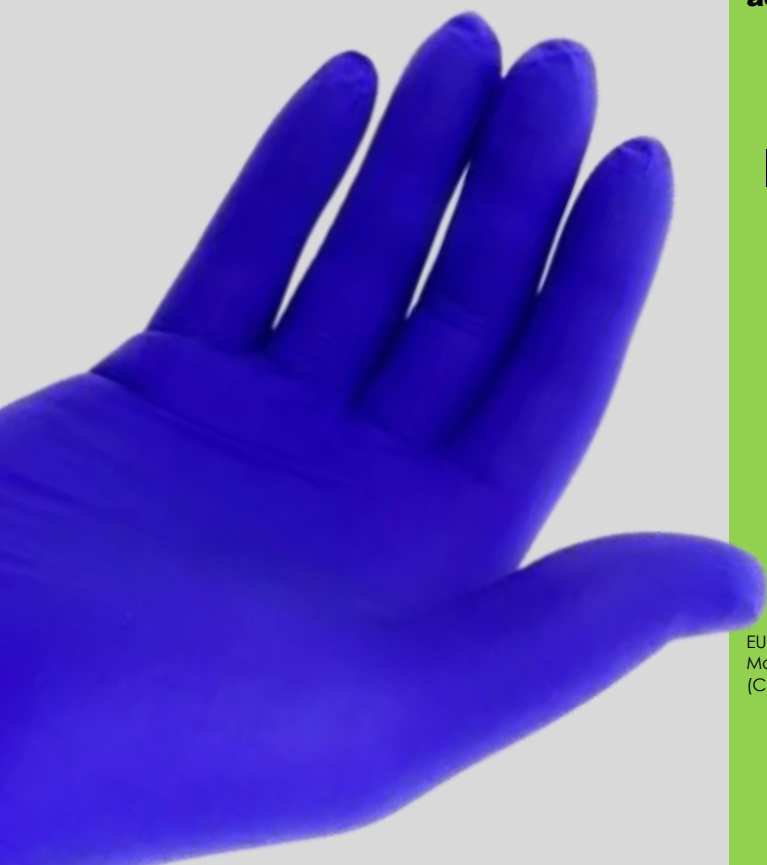

DISPOSABLE COBALT BLUE NITRILE GLOVES•POWDER FREE KEY FEATURES

EXCELLENT BARRIER PROTECTION
CHEMICAL PROTECTIVE
PUNCTURE RESISTANT
GREAT ELASTICITY
EXCELLENT GRIP
EASY DONNING
NON STERILE
LATEX FREE
SINGLE USE

PPE Category III - Chemical Protective & Virus Protective

Unique colour, ideal for food handling
Manufactured in ISO 9001 &, ISO 13485
accredited facility

AVAILABLE SIZES

XS 5-6	S 6-7	M 7-8	L 8-9	XL 9-10
--------	-------	-------	-------	---------



EU Type Examination carried out by CENTEXBEL, Belgium (CE 0493);
Module D Conformity Assessment carried out by SGS Fimko OY, Finland
(CE 0598)



RECOMMENDED FOR

Food and Beverages Industry
Aerospace Maintenance
Janitorial Maintenance
Oily or Wet Surfaces
Chemical Handling
Liquid Handling
Automotive
Inspection
Assembly
Painting

“Comfortable fit with great dexterity”



PRODUCT DESCRIPTION

3.0g, Cobalt Blue Disposable Powder Free Nitrile Glove, 240mm

PPE Category III / Food Handling

Finger Tip Textured

Beaded Cuff

Single Use

Non Sterile

MATERIAL

Acrylonitrile Butadiene Copolymer Latex

COLOR

Cobalt Blue

PACKAGING

100 pieces of gloves in a dispenser box OR bags

10 dispensers / bags in a shipping case

STORAGE CONDITION

Recommended to store in a cool and dry place with temperature below 30°C

SHELF LIFE

3 years



DIMENSION AND SPECIFICATIONS

Item	XS	S	M	L	XL	Inspection Level
Hand Size	6	7	8	9	10	(AQL)
Width	75±5mm	85±5mm	95±5mm	105±5mm	115±5mm	S2 AQL 4.0
Glove Length	240mm minimum	240mm minimum	240mm minimum	240mm minimum	240mm minimum	
Cuff Thickness	0.05mm minimum	0.05mm minimum	0.05mm minimum	0.05mm minimum	0.05mm minimum	S2 AQL 4.0
Palm Thickness	≥0.06mm	≥0.06mm	≥0.06mm	≥0.06mm	≥0.06mm	
Finger Thickness	≥0.08mm	≥0.08mm	≥0.08mm	≥0.08mm	≥0.08mm	
Weight (Reference)	2.6g ±0.2g	2.9g ±0.2g	3.0g ±0.2g	3.3g ±0.2g	3.8g ±0.2g	

PERFORMANCE EVALUATION

Chemicals	ISO 374-1 / Type B Permeation Resistance	Breakthrough Time in (min)	EN 374-4 Degradation in (%)
J: Heptane	Level 6	>480	47.7
K: Sodium Hydroxide 40%	Level 6	>480	-25.6
T: Formaldehyde 37%	Level 6	>480	2.1

PHYSICAL PROPERTIES

	Standard	Before Ageing	After Ageing
Force at Break (N)	EN 455-2	min. 6N	min. 6N
Tensile Strength (Mpa)	ASTM D6319	min. 14	min. 14
Elongation (%)	ASTM D6319	500	400

OTHER PARAMETERS


Criteria	Inspection Level / AQL	Standard
Pinholes	G1 / AQL 1.5	
Major Visual	G1 / AQL 2.5	
Powder Content	max. 2mg/glove	ASTM D6124
Protein Content	N/A	ASTM D5712

ORDERING INFORMATION

Size	XS (5.5-6)	S (6.5-7)	M (7.5-8)	L(8.5-9)	XL(9.5-10)
Code	35BC - XS	35BC - S	35BC - M	35BC - L	35BC - XL

HARMONIZED STANDARDS

ASTM D6319, ASTM D6124, EN455 1-4, EN420:2003 + A1:2009, EN 1186, EN 374 1-5, EN 16523-1
ISO 10993- 1:2018;5:2009; 10:2013, ISO 15223-1:2016, ISO 1041:2008 + A1:2013, ISO 16604:2004,
ISO 3071:2020, ISO 13485:2016, ISO 9001:2015, FDA 21 CFR 177.2600



Contact us for ordering or more information



KGM GLOVES SDN. BHD.
LOT 18893 & 18894,
Jalan Perusahaan 9,
Kawasan Perusahaan Kamunting,
34600 Kamunting, Perak,
Malaysia.
Tel: +605-891 3612
Website: www.kgmgloves.com
Email: contact@kunng.com.my

