



# ULTIMA 22 TECHNICALS

## Our Commitment to Safe Installation


The Ultima 22 has been engineered for safe, straightforward installation. When installed on a suitable load-bearing wall by a qualified plumber, the patented C-bracket system provides a secure and reliable fixing. Designed in accordance with the principles of VDI 6036, the fixing system is engineered to deliver long-term safety and stability under normal operating conditions.

For optimum performance, the installer is responsible for verifying that the supporting wall is suitable and for selecting the appropriate fixings for the wall construction. Following the Modahat installation instructions will help ensure the safe, reliable, and long-lasting performance of your radiator.

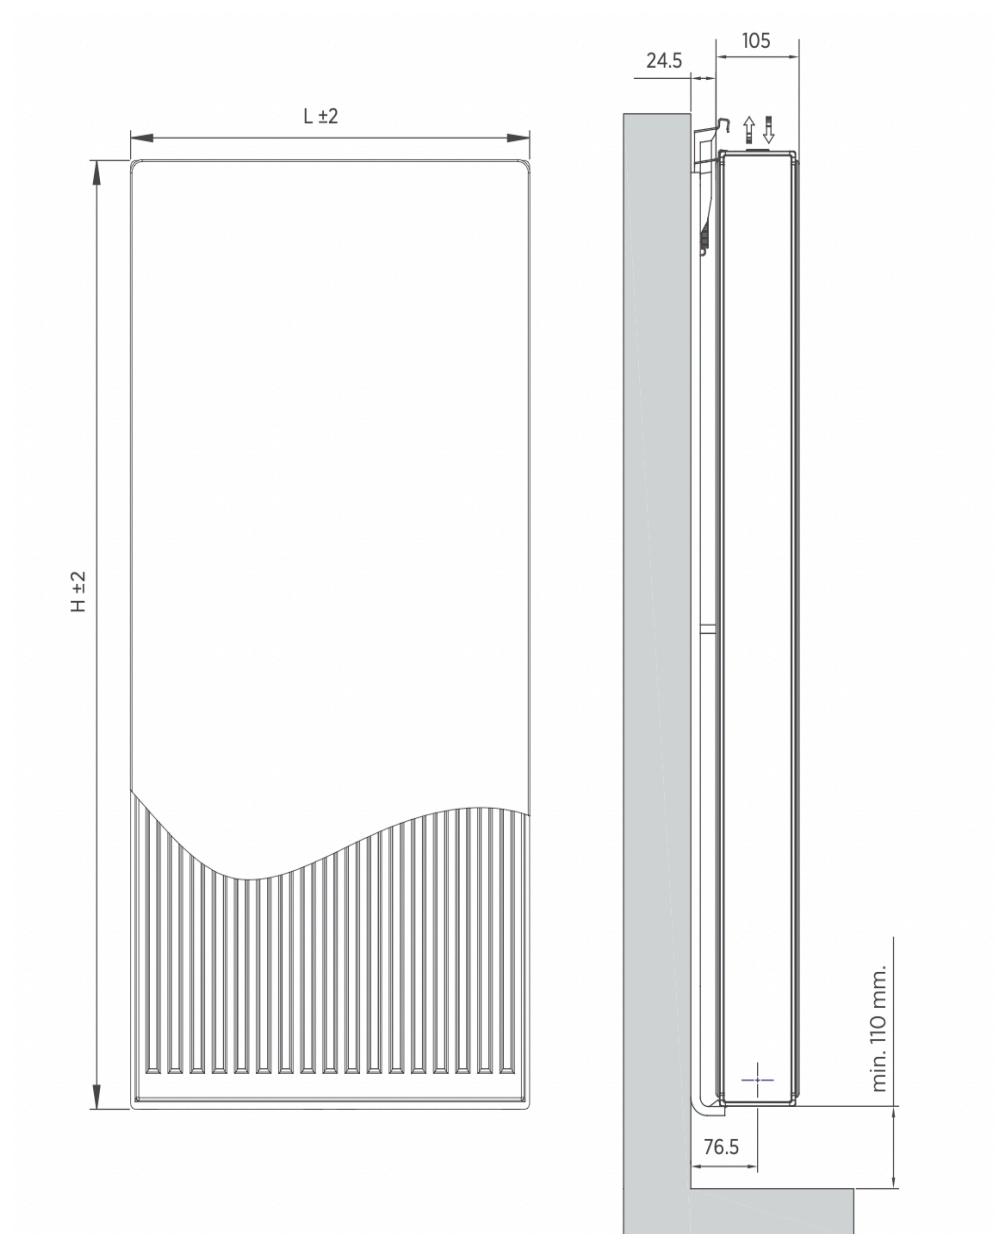

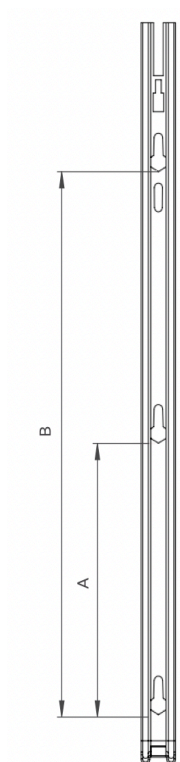

| H<br>(mm) | A±3<br>(mm) | B±3<br>(mm) |
|-----------|-------------|-------------|
| 1200      | 507         | 1017        |
| 1300      | 557         | 1117        |
| 1400      | 607         | 1217        |
| 1500      | 657         | 1317        |
| 1600      | 707         | 1417        |
| 1700      | 757         | 1517        |
| 1800      | 807         | 1617        |
| 1900      | 857         | 1717        |
| 2000      | 907         | 1817        |
| 2100      | 957         | 1917        |
| 2200      | 1007        | 2017        |
| 2300      | 1057        | 2117        |
| 2400      | 1107        | 2217        |

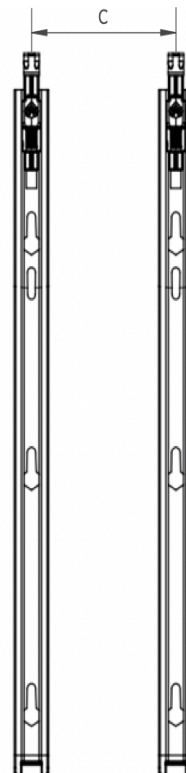

| L<br>(mm) | C±3<br>(mm) |
|-----------|-------------|
| 400       | 300         |
| 500       | 400         |
| 600       | 500         |

