

ALUMINIUM PORTABLE

ALUMINIUM BALL STOP NETTING

6m post height and 3.6m post height available.


COMPONENTS

| | | |
|------------|---|------------|
| FXB | GOALPOST SLOT FIXINGS (20 FIXINGS PER POST on 6m post) (12 FIXINGS PER POST on 3.6m post) | x60 |
| NT | NET TIES | x16 |
| TS | UNIQUE SECURE NET TENSIONING SYSTEM (1 PER POST) | x3 |
| N | NET 6m x 10m or 3.6m x 10m | x1 |

POSTS


| | | |
|-----------|--|-----------|
| P | 80mm OD ALUMINIUM POST (Various post heights available) 6m LONG OR 3m LONG | x4 |
| PI | POST INSERT 2M | x4 |
| GS | GROUND SOCKET 1M | x4 |

Sectional posts also available

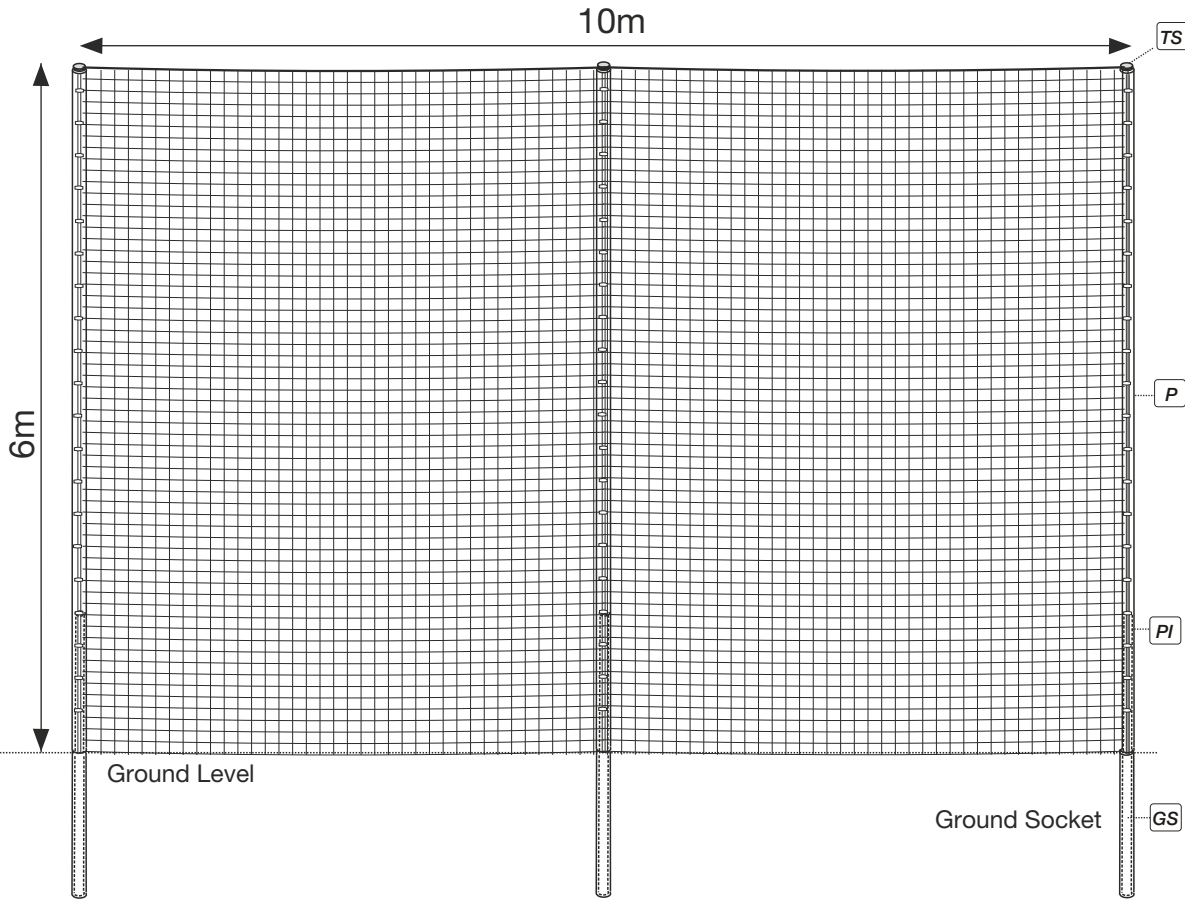

GROUND SOCKET Installation diagram

Installation to European Standards BS En748



- 1 Upright
- 2 Sport Surface
- 3 Concrete Block
- 4 Ground Socket
- 5 Drainage Hole
6. Pea Gravel

WARNING Check for underground services before excavating

tsaGoal
www.itsagoal.co.uk

FITTING INSTRUCTION

TEL: 0114 242 4244

1 SLOT NET FIXINGS FOR POSTS

2

3

4

5

6 Once net fixings have net cord inside twist round to insert into the slot on the goalpost extrusion

7

8

⚠ WARNING

MAKE SURE NO CHILDREN ARE PRESENT AT ANY TIME DURING INSTALLATION, REMOVAL OR ASSEMBLY.

DO NOT SWING ON POSTS

⚠ WARNING

DO NOT TOUCH OVERHEAD SERVICES WITH POST SECTIONS. CHECK THE POSITION OF ANY OVERHEAD SERVICES WHEN SETTING UP OR DISMANTLING THE GOALS, EG. POWER LINES, TELEPHONE CABELS ETC.

⚡

DO NOT TOUCH OVERHEAD SERVICES

OFFICE USE: Part TS - 60mm solid steel bar, electroplated welded washer ends, tight fit tape prevent wind rock, - 250mm Lengths

WE RESERVE THE RIGHTS TO AMEND THE SPECIFICATIONS OF OUR SOCCER PRODUCTS IN THE INTEREST OF CONTINUED DEVELOPMENT. YOUR PRODUCT THEREFORE MAY DIFFER LIGHTLY TO THOSE ILLUSTRATED. E&OE

WORLDWIDE © COPYRIGHT 2001 ITSA GOAL. ALL RIGHTS RESERVED A REGISTERED DESIGN