




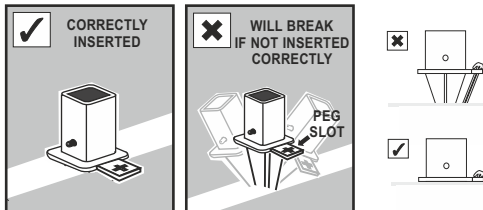


## COMPONENTS

PER POST

|          |                            |    |   |
|----------|----------------------------|----|---|
| <b>A</b> | FRONT GROUND ANCHOR        | x1 |  |
| <b>B</b> | GROUND PEG                 | x1 |  |
| <b>C</b> | LARGE QUICK RELEASE BUTTON | x1 |  |
| <b>E</b> | RESPECT BARRIER POST       | x1 |  |
| <b>F</b> | BARRIER POST CAP           | x1 |  |

## FRONT GROUND ANCHORS HAMMER FULL DOWN INTO THE GROUND






1. Make sure the front Ground Anchor is inserted fully and level with the grass surface. If the ground anchor is not fully inserted when pegged down, tension will cause the peg slot to break.

When the Ground Anchor is in position you can now slide the Uprights onto the anchors.

To secure the Anchor in the ground use a Ground peg which will keep the Anchor in place.

The Front Ground Anchors need to be sunk into the ground. For hard grass surfaces You may need to hammer the Front Ground Anchor. Use a wood block to protect the Anchor

**WARNING : ALWAYS WATER THE GROUND TO SOFTEN BEFORE HAMMERING THE SPIKES AND PEGS**

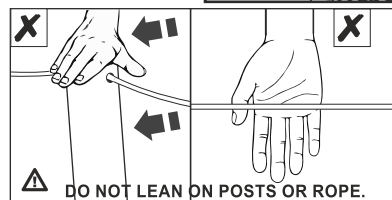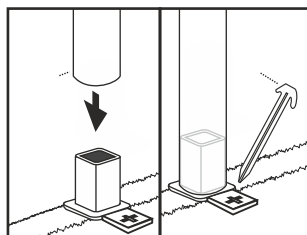



RESPECT BARRIER POSTS WILL NOT BE REPLACED WITHIN THE GUARANTEE PERIOD IF MISUSED. THE RESPECT BARRIER IS ONLY A SEPARATOR BETWEEN SPECTATORS AND PLAYERS.

## RESPECT BARRIER - NYLON ANCHOR - OPTION FOR ROPE (rope not included)

Post sizes available  
815mm or 580mm LONG


Pre drilled holes ready to take optional nylon rope

Tether ends of the posts for extra stability

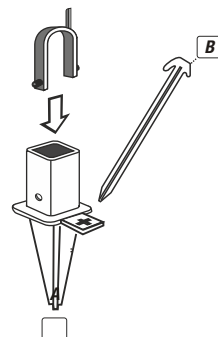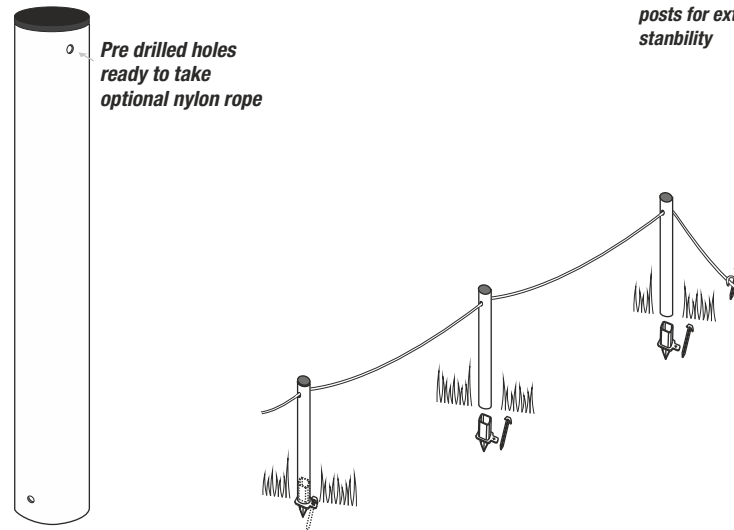


### OPTIONAL METAL ANCHORS


Metal anchors can be added to the system for extra strength and stability, useful on long lengths of barrier

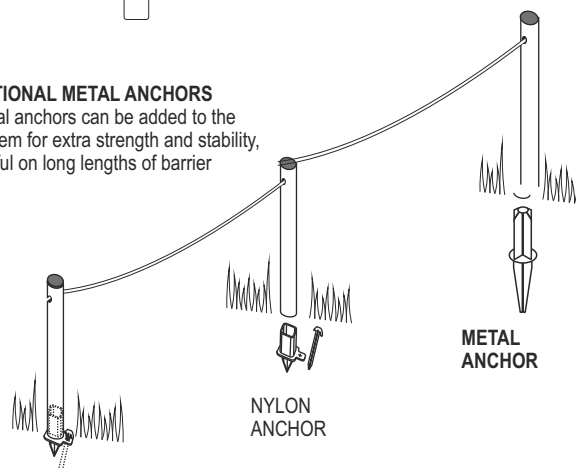


SPARE PARTS TEL: 0114 24 24 244

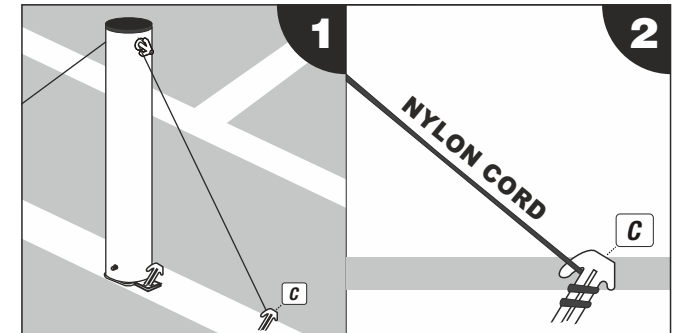

1. With your first barrier post in position use the tension peg to reinforce stability before assembling the rest of the barrier pack. Always start erecting the barrier from one side for an easy and efficient assembly (steps 1 - 2).

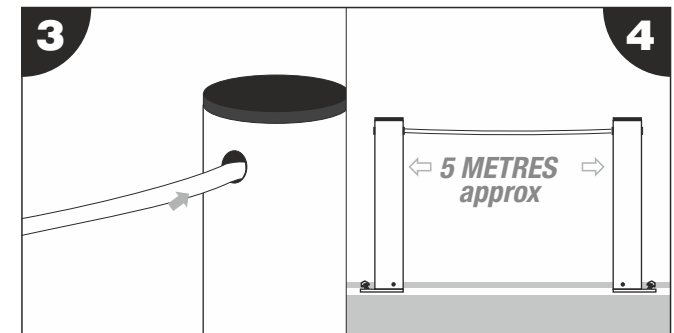

1. Attach your own rope into pre drilled holes. You will need approximately 5 metres of rope between posts.

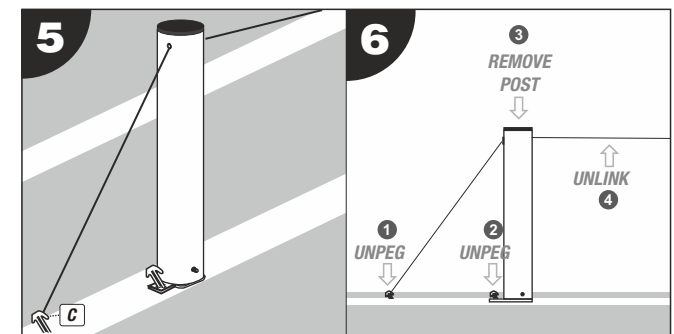

1. On the last barrier post use a tension peg to complete your barrier system and reinforce stability. To dismantle simply start at one end and follow the steps in reverse order un-pegging and un-linking the posts (steps 5 - 6).

**Please note: This is a temporary no load bearing quick-fit barrier to separate spectators from players for a more permanent solution please visit itsagoal.co.uk**