

Galvanized 6x19 IWRC Wire Rope


Right Regular lay

IPS (Improved Plowed Steel) Grade Wire Rope

Maximum Break Strength 62 Tons

Rope Diameter	Weight In Foot In Lbs	Break Strength (Tons)
1/4	0.12	2.65
5/16	0.18	4.12
3/8	0.26	5.90
7/16	0.35	8.00
1/2	0.46	10.35
9/16	0.59	13.05
5/8	0.72	16.10
3/4	1.04	23.00
7/8	1.42	31.10
1	1.85	40.40
1-1/8	2.43	50.90
1-1/4	2.89	62.50





Galvanized 6x19 Fiber Core


Right Regular Lay

I.P.S Grade Wire Rope

High Quality Cable with Maximum Break Strengths

Rope Diameter	Weight In Foot In Lbs	Break Strength (Tons)
1/4	0.11	2.74
5/16	0.16	3.83
3/8	0.24	5.49
7/16	0.32	7.44
1/2	0.42	9.63
9/16	0.53	12.15
5/8	0.66	15.00
3/4	0.95	21.40
7/8	1.29	29.00
1	1.68	37.60





Galvanized IWRC 6x25 Wire Rope


Right Regular lay
I.P.S Grade Wire Rope

Also Available in E.E.I.P.S

Maximum Break Strength 198 Tons

Rope Diameter	Weight In Foot In Lbs	Break Strength (Tons)
1/4	0.12	3.40
5/16	0.18	5.27
3/8	0.26	7.55
7/16	0.35	10.20
1/2	0.46	13.30
9/16	0.59	16.80
5/8	0.72	20.60
3/4	1.04	29.40
7/8	1.42	39.80
1	1.85	51.70
1 1/8	2.43	65.00
1 1/4	2.89	79.90
1 3/8	3.50	96.00
1 1/2	4.16	114.00
1 5/8	4.88	132.00
1 3/4	5.67	153.00
2	7.39	198.00





Galvanized Wire Rope IWRC 6x36


Right Regular Lay

EIPS (Extra Improved Plowed Steel)

High Quality Cable with Maximum Break Strengths

Rope Diameter	Weight In Foot In Lbs	Break Strength (Tons)
1/4	0.12	3.40
5/16	0.18	5.27
3/8	0.26	7.55
7/16	0.35	10.20
1/2	0.46	13.30
9/16	0.59	16.80
5/8	0.72	20.60
3/4	1.04	29.40
7/8	1.42	39.80
1	1.85	51.70
1 1/8	2.34	65.00
1 1/4	2.89	79.90
1 3/8	3.50	96.00
1 1/2	4.16	114.00
1 5/8	4.88	132.00
1 3/4	5.67	153.00
2	7.39	198.00
2 1/4	9.36	247.00
2 1/2	11.60	302.00
2 3/4	14.00	361.00
3	16.60	425.00
3 1/2	22.71	564.00
4	29.57	720.00
4 1/2	37.34	889.00



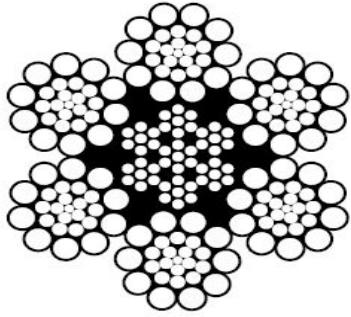

Galvanized Wire Rope 6x37 IWRC


Right Regular Lay

I.P.S (Improved Plowed Steel) Grade

High Quality Cable with Maximum Break Strengths

Rope Diameter	Weight In Foot In Lbs	Break Strength (Tons)
1/4	0.12	2.65
5/16	0.18	4.12
3/8	0.26	5.90
7/16	0.35	8.00
1/2	0.46	10.35
9/16	0.59	13.05
5/8	0.72	16.10
3/4	1.04	23.00
7/8	1.42	31.10
1	1.85	40.40
1 1/8	2.34	50.90
1 1/4	2.89	62.50
1 3/8	3.50	75.20





Galvanized 6x37 Fiber Core

Right Regular Lay

I.P.S Grade Wire Rope

High Quality Cable with Maximum Break Strengths

Rope Diameter	Weight In Foot In Lbs	Break Strength (Tons)
1/4	0.11	2.47
5/16	0.16	3.83
3/8	0.24	5.49
7/16	0.32	7.44
1/2	0.42	9.63
9/16	0.53	12.15
5/8	0.66	15.00
3/4	0.95	21.40
7/8	1.29	29.00
1	1.68	37.60

