

# Bright 6x19 Wire Rope

IPS (Improved Plowed Steel) Grade Wire Rope


Meets Federal Specification RR-W-410

Available in multiple diameters

Right Regular lay

Rope Diameter	Weight In Foot In Lbs	Break Strength (Tons)
1/4	0.12	2.94
5/16	0.18	4.58
3/8	0.26	6.56
7/16	0.35	8.89
1/2	0.46	11.50
9/16	0.59	14.50
5/8	0.72	17.90
3/4	1.04	25.60
7/8	1.42	34.60
1	1.85	44.90
1-1/8	2.34	56.50
1-1/4	2.89	69.00
1-1/2	4.16	114.00
1-5/8	4.88	132.00
1-3/4	5.67	153.00
2	7.39	198.00
2-1/4	9.36	247.00
2-3/8	10.40	274.00
2-1/2	11.60	302.00
2-3/4	14.00	361.00



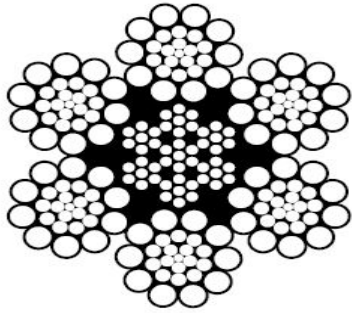

# Bright 6x26 Wire Rope


E.I.P.S Grade Wire Rope

Meets Federal Specification RR-W-410

Available in multiple diameters

Right Regular lay

Rope Diameter	Weight In Foot In Lbs	Break Strength (Tons)
1/4	0.12	3.40
5/16	0.18	5.27
3/8	0.26	7.55
7/16	0.35	10.20
1/2	0.46	13.30
9/16	0.59	16.80
5/8	0.72	20.60
3/4	1.04	29.40
7/8	1.42	39.80
1	1.85	51.70
1-1/8	2.34	65.00
1-1/4	2.89	79.90
1-3/8	3.50	96.00
1-1/2	4.16	114.00
1-5/8	4.88	132.00
1-3/4	5.67	153.00
2	7.39	198.00
2-1/4	9.36	247.00
2-3/8	10.40	274.00
2-1/2	11.60	302.00
2-3/4	14.00	361.00
3	16.60	425.00



# Bright 6x36 Wire Rope


Right Regular Lay

EIPS (Extra Improved Plowed Steel)

High Quality Cable with Maximum Break Strengths

Rope Diameter	Weight In Foot In Lbs	Break Strength (Tons)
1/4	0.12	3.40
5/16	0.18	5.27
3/8	0.26	7.55
7/16	0.35	10.20
1/2	0.46	13.30
9/16	0.59	16.80
5/8	0.72	20.60
3/4	1.04	29.40
7/8	1.42	39.80
1	1.85	51.70
1-1/8	2.34	65.00
1-1/4	2.89	79.90
1-3/8	3.50	96.00
1-1/2	4.16	114.00
1-5/8	4.88	132.00
1-3/4	5.67	153.00
2	7.39	198.00
2-1/4	9.36	247.00
2-1/2	11.60	302.00
2-3/4	14.00	361.00
3	16.60	425.00



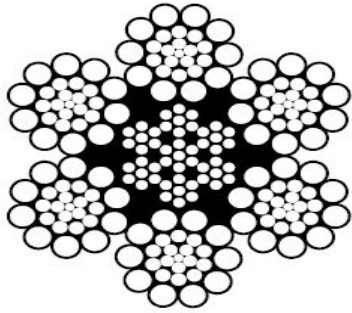

# Bright 6x37 Wire Rope


Right Regular Lay

EIPS (Extra Improved Plowed Steel)

High Quality Cable with Maximum Break Strengths

Rope Diameter	Weight In Foot In Lbs	Break Strength (Tons)
1/4	0.12	3.40
5/16	0.18	5.27
3/8	0.26	7.55
7/16	0.35	10.20
1/2	0.46	13.30
9/16	0.59	16.80
5/8	0.72	20.60
3/4	1.04	29.40
7/8	1.42	39.80
1	1.85	51.70





# Bright 6x19 Fiber Core

Right Regular Lay


I.P.S Grade Wire Rope

High Quality Cable with Maximum Break Strengths

Rope Diameter	Weight In Foot In Lbs	Break Strength (Tons)
1/4	0.11	2.74
5/16	0.16	4.26
3/8	0.24	6.10
7/16	0.32	8.27
1/2	0.42	10.70
9/16	0.53	13.50
5/8	0.66	16.70
3/4	0.95	23.80
7/8	1.29	32.20
1	1.68	41.80







# Bright 6x37 Fiber Core


Right Regular Lay

I.P.S Grade Wire Rope

High Quality Cable with Maximum Break Strengths

Rope Diameter	Weight In Foot In Lbs	Break Strength (Tons)
1/4	0.11	2.74
5/16	0.16	4.26
3/8	0.24	6.10
7/16	0.32	8.27
1/2	0.42	10.70
9/16	0.53	13.50
5/8	0.66	16.70
3/4	0.95	23.80
7/8	1.29	32.20
1	1.68	41.80





# Bright 6x15 Fiber Core

Right Regular Lay

I.P.S Grade Wire Rope

High Quality Cable with Maximum Break Strengths

Rope Diameter	Weight In Foot In Lbs	Break Strength (Tons)
1/2	0.42	12,500
5/8	0.45	19,100
3/4	0.61	27,600

