

EFFICIENT INSTALLATIONS



RESIDUAL CURRENT CIRCUIT BREAKERS TYPE F - NFIF

- **RELEVANT FOR** PROTECTION WHEN USING WASHING MACHINES, VACUUM CLEANERS, DISHWASHERS, HEATING PUMPS, LIGHTING SYSTEMS
- **CAPABLE OF DETECTING** MIXED FREQUENCIES UP TO 1 KHz

RESIDUAL CURRENT CIRCUIT BREAKERS

NF1F

FEATURES

- ISKRA **NF1F ARE TYPE F RESIDUAL CURRENT CIRCUIT BREAKERS** (RCCB) FOR **WHICH TRIPPING IS ENSURED AS FOR TYPE A AND IN ADDITION FOR RESIDUAL CURRENTS WITH MIXED FREQUENCIES** THAT CAN RESULT FROM SINGLE-PHASE ELECTRICAL LOADS WITH FREQUENCY INVERTERS.
- **INTENDED FOR** PROTECTION WHEN USING **WASHING MACHINES, VACUUM CLEANERS, DISHWASHERS, HEATING PUMPS, LIGHTING SYSTEMS ...**
- **CAPABLE OF DETECTING** MIXED FREQUENCIES UP TO 1 kHz
- THE **TRIPPING CHARACTERISTIC OF TYPE F IS NOT INFLUENCED** BY SMOOTH D.C. RESIDUAL CURRENTS **UP TO 10 mA**.
- **FUNCTIONS OF DETECTION, EVALUATION AND INTERRUPTION** FOR TYPE F RESIDUAL CURRENTS DO NOT DEPEND ON THE LINE VOLTAGE.
- **VERSIONS:**
 - NFI2F, NFI4F: SHORT-TIME DELAY TRIPPING
 - NFI2FS, NFI4FS: SELECTIVE TYPE
- **INCREASED UNWANTED TRIPPING AND SURGE CURRENT WITHSTAND CAPABILITY** WITH CURRENT WAVEFORM 8/20 μ s UP TO 3 kA
- OPTIONAL OPERATING POSITION
- **DEGREE OF PROTECTION IP20**; AFTER INSTALLATION IN A **DISTRIBUTION BOX IP40**.

INTENDED FOR
PROTECTION
PROTECTION
PROTECTION



OTHER TYPES AVAILABLE

TYPE AC, A: SWITCH WITH INSTANTANEOUS TRIPPING. TYPE AC IS SENSITIVE TO RESIDUAL SINUSOIDAL ALTERNATING CURRENTS ONLY AND TYPE A IS SENSITIVE TO RESIDUAL SINUSOIDAL ALTERNATING CURRENTS AND RESIDUAL PULSATING DIRECT CURRENTS.

TYPE S: A SWITCH WITH DELAYED BREAK ENABLING SELECTIVITY REGARDING A GENERAL TYPE AND A SHORT-TIME DELAYED TYPE (TYPE G) CONNECTED ON THE LOAD SIDE. BREAK TIME IS LONGER THAN 40 ms. SWITCHES EXCEL IN HIGH RESISTANCE TO SURGE CURRENTS (UP TO 3 kA), WHICH PREVENT UNWANTED TRIPPINGS. THEIR RATED CURRENTS ARE FROM 25 TO 100 A, AND RATED RESIDUAL CURRENTS ARE 100, 300 AND 500 mA. THIS IS TYPE A, AND CUSTOMER CAN CHOOSE BETWEEN NFI2S TWO-POLE AND NFI4S FOUR-POLE SWITCHES.

TYPE G: A SHORT-TIME DELAYED BREAKING CHARACTERISTIC (MINIMUM NON-ACTUATING PERIOD IS 10 Ms). THE SWITCHES ARE RESISTANT TO UNWANTED TRIPPING AT CURRENT IMPULSES AND HAVE SURGE CURRENT WITHSTAND CAPABILITY UP TO 3 kA. THEIR RATED CURRENTS ARE FROM 25 TO 100 A, AND RATED RESIDUAL CURRENTS ARE 30, 100, 300 AND 500 mA. THIS IS TYPE A, AND CUSTOMER CAN CHOOSE BETWEEN NFI2K TWO-POLE AND NFI4K FOUR-POLE SWITCHES.

ALL TYPES ARE VDE APPROVED.

RESIDUAL CURRENT CIRCUIT BREAKERS

NF1F

TECHNICAL DATA	NFI2F NFI2FS	NFI4F NFI4FS
GENERAL		
STANDARD		
NO. OF POLES	2	4
RATED VOLTAGE	U _n V	230
RATED IMPULSE VOLTAGE	U _{imp} kV	4
RATED FREQUENCY	f Hz	50
RATED CURRENT	I _n A	25, 40, 63, 80, 100
RATED RESIDUAL OPERATING CURRENT	I _{An} mA	30, 100, 300, 500
FREQUENCY RESPONSE RANGE	f Hz	0 - 1000
RATED MAKING AND BREAKING CAPACITY = RATED RESIDUAL MAKING AND BREAKING CAPACITY	I _m = I _{am} A	800 (I _n = 16 - 80 A) 1000 (I _n = 100 A)
MAX. BACK-UP FUSE SHORT-CIRCUIT CURRENT	I _v A	63 (I _n = 25 - 40 A) 80 (I _n = 63, 80 A) 100 (I _n = 100 A)
TERMINAL CAPACITY	S mm ²	1 ... 35
MAX. BREAK TIMES	ms	NFI2F, NFI4F: 1 x I _{An} : ≤ 300 ms; 5 x I _{An} : ≤ 40 ms NFI2FS, NFI4FS: 1 x I _{An} : ≤ 500 ms; 5 x I _{An} : ≤ 150 ms
MIN. NON-OPERATING TIMES	ms	NFI2F, NFI4F: 10 ms NFI2FS, NFI4FS: 40 ms
MAINS CONNECTION		EITHER TOP OR BOTTOM
AMBIENT TEMPERATURE	°C	-25 ... +40
STORAGE TEMPERATURE	°C	-35 ... +60
TIGHTENING TORQUE	Nm	2.0

Note: Rated frequency 60 Hz on request.




**FUNCTIONS OF
DETECTION
EVALUATION
INTERRUPTION**

RESIDUAL CURRENT CIRCUIT BREAKERS


NF1F

DIMENSIONS

TWO-POLE




FOUR-POLE

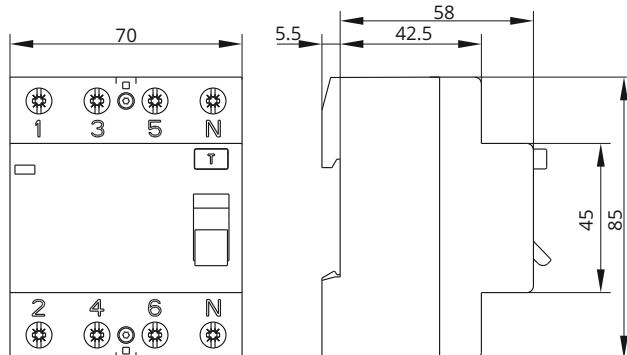


SHEMATICS

TWO-POLE

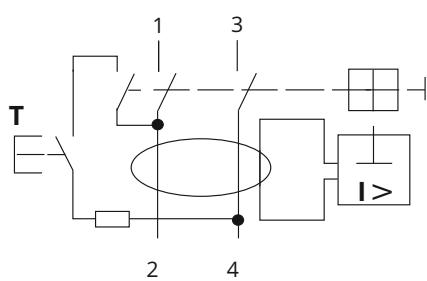

FOUR-POLE

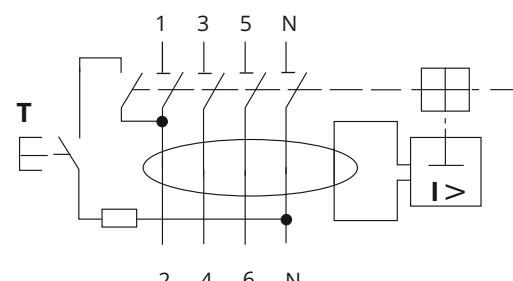

ORDERING DATA

NFI2F - 25 / 0.03
NFI4F - 63 / 0.3

RATED RESIDUAL OPERATING CURRENT I_{dn} (A)

RATED CURRENT I_n (A)

TYPE