

## SPECIFICATIONS

Overall Thickness:	5mm
Wear Layer Thickness:	20mil
Edge Treatment:	Straight Edge
Texture:	Hardened Textured Ceramic No Wax Finish
Warranty:	10 Year Heavy Commercial Warranty
Adhesive:	CPI Alliance, CPI Victory
Maintenance:	Neutral Cleaner Only. No applied finishes, strippers or sealants.
Moisture Rating:	Up to 100% Rh when installed with proper adhesive.

## SIZES


W101 - W108  
6" x 48"

W109 - W114  
7" x 48"

## INSTALLATION



Herringbone



Traditional

## TESTING

Test Item	Test Method	Results
Static Load Limit	ASTM F970	2,000psi
Squareness	ASTM F2055	Passes
Flexibility	ASTM F137	Passes
Dimensional Stability	ASTM F2199	Passes
Chemical Resistance	ASTM F925	Passes
Resistance to Light	ASTM F1515	Passes
Resistance to Heat	ASTM 1514	Passes
Fire Resistance	ASTM E648	Passes
Smoke Density	ASTM E662	Passes
Sound Insulation	ISO 10140	>15db Rating 70, STC Rating 63

## MANUFACTURING

ISO 9001 Quality Management System  
ISO 14001 Environmental Management System  
OHSAS 18001 Occupational Health and Safety Management System

## GENERAL INFORMATION

For Pricing, Samples, Warranties, and Installation Guides, please email [contact@catalinaproducts.international](mailto:contact@catalinaproducts.international) or call 714 -716 - 1667.

## AIR QUALITY

Low VOC  
Floor Score  
Certification



(1): Made in America; materials are produced manufactured in Ohio. In some cases where is supply chain issues exist, materials may be source else were.


## SPECIFICATIONS

Overall Thickness:	5mm
Wear Layer Thickness:	20mil
Edge Treatment:	Straight Edge
Texture:	Hardened Textured Ceramic No Wax Finish
Warranty:	10 Year Heavy Commercial Warranty
Adhesive:	CPI Alliance, CPI Victory
Maintenance:	Neutral Cleaner Only. No applied finishes, strippers or sealants.
Moisture Rating:	Up to 100% Rh when installed with proper adhesive.

## SIZES

12" x 24" (30.48cm x 60.96cm)

## INSTALLATION

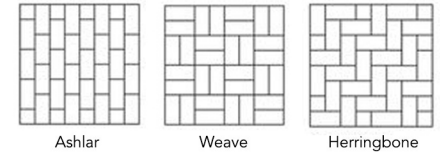

**LOCAL STOCK** Colors Available: ST201 | Urban stone ST202 | Urban Grey ST203 | Warm Crete ST204 | Cool Crete

## TESTING

Test Item	Test Method	Results
Static Load Limit	ASTM F970	2,000psi
Squareness	ASTM F2055	Passes
Flexibility	ASTM F137	Passes
Dimensional Stability	ASTM F2199	Passes
Chemical Resistance	ASTM F925	Passes
Resistance to Light	ASTM F1515	Passes
Resistance to Heat	ASTM 1514	Passes
Fire Resistance	ASTM E648	Passes
Smoke Density	ASTM E662	Passes
Sound Insulation	ISO 10140	>15db Rating 70, STC Rating 63

## MANUFACTURING

ISO 9001 Quality Management System  
ISO 14001 Environmental Management System  
OHSAS 18001 Occupational Health and Safety Management System

## GENERAL INFORMATION

For Pricing, Samples, Warranties, and Installation Guides, please email [contact@catalinaproducts.international](mailto:contact@catalinaproducts.international) or call 714 -716 - 1667.

## AIR QUALITY

Low VOC  
Floor Score  
Certification



(1): Made in America; materials are produced manufactured in Ohio. In some cases where is supply chain issues exist, materials may be source else were.