


SPECIFICATIONS

| | |
|--------------------|--|
| Overall Thickness: | 3.0mm |
| Wear Layer : | Micro Reinforced Polymer 28Mil |
| Edge Treatment: | Straight Edge |
| Texture: | Nano "Tick" Finish |
| Warranty: | 20 Year Limited |
| Adhesive: | CPI Alliance, CPI Victory, And CPI Cambria |
| Maintenance: | Clean Sweep Technology No applied finishes, strippers or sealants |
| Moisture Rating: | Up to 100% Rh when installed with proper adhesive |

SIZES

18" x 18" (45.72cm x 45.72cm)
Tiles Per Carton 16
Sq Ft Per Carton 36

INSTALLATION

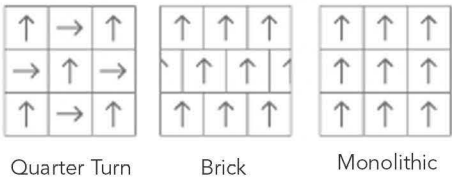

TESTING

| Test Item | Test Method | Results |
|---------------------------------|-------------|----------|
| Static Load Limit | ASTM F970 | 2,000psi |
| Squareness | ASTM F2055 | Passes |
| Flexibility | ASTM F137 | Passes |
| Dimensional Stability | ASTM F2199 | Passes |
| Chemical Resistance | ASTM F925 | Passes |
| Resistance to Light | ASTM F1515 | Passes |
| Resistance to Heat | ASTM 1514 | Passes |
| Fire Resistance | ASTM E648 | Passes |
| Smoke Density | ASTM E662 | Passes |
| Dynamic Coefficient of Friction | ANSI A326.3 | 0.43 |

MANUFACTURING

ISO 9001 Quality Management System
ISO 14001 Environmental Management System
OHSAS 18001 Occupational Health and Safety
Management System

AIR QUALITY

Low VOC
Floor Score
Certification



GENERAL INFORMATION

For Pricing, Samples, Warranties, and Installation Guides, please contact us at contact@catalinaproducts.international or call 714-716-1677.

(1): Made in America; materials are produced manufactured in Ohio. In some cases where is supply chain issues exist, materials may be source else were.