
Product Code: 00368

Ceramic Lamps Ceramic Master-PLUS

Description: CM-PLUS T 150W/U/UVS/G12/830


Performance Data

Rated Light Output (Lumens @ 100 hours)	15000
Lamp Lumens per Watt (100hrs)	100
Rated Life (Hrs @ 10Hr./Start)	15000
Correlated Colour Temperature (K)	3000
Chromaticity (CIE - X Y)	435,400
Colour Rendering Index (CRI) or (Ra)	80+
Typical Warm Up Time (Minutes)	3
Typical Hot Restart Time (Minutes)	15
Burning Position	Universal
S/P (Multiplier)	1.4
Energy Rating (ErP)	A+ 165 kWh/1000h




Physical Data

Base Designation	G12
Bulb Designation	T6
Bulb Diameter (mm)	19
Max. Overall Length (mm)	100
Light Centre Length (mm)	56
Max. Base Temperature (°C)	350
Max. Bulb Temperature (°C)	500
Luminaire Type	Enclosed
Socket Pulse Rating (KV)	5
Mercury Content (mg)	9.2

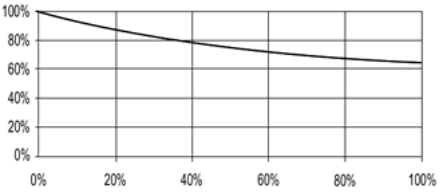


Lumen Maintenance (Light Output vs. Rated Life)

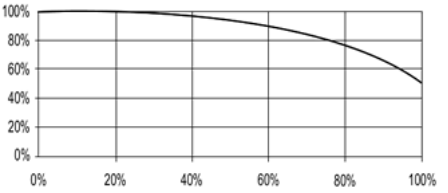

Lamp Mortality (Survivors vs. Rated Life)

Lamp Electrical Data

Nominal Lamp Wattage (W)	145
Lamp Operating Voltage (V)	96
Lamp Operating Current (A)	1.8
Min. Open Circuit Voltage (RMS)	198
Min. Starting Pulse (Peak V)	3500-5000
Min. Pulse Width (Microseconds)	1 @2700V
Min. Pulse Rate Per ½ cycle	1
Pulse Position (Electrical Degrees)	60-90, 240-270



Revision: 12-03-2018

See page 2 for product notes

Venture Lighting Europe Ltd., Trinity Court, Batchworth Island, Church Street, Rickmansworth, WD3 1RT, United Kingdom
Tel: +44 (0) 845 230 2222, Fax: +44 (0) 845 230 2077, www.venturelightingeurope.com

Product Code: 00368

Ceramic Lamps Ceramic Master-PLUS

Notes:

Burning position is based on electronic control gear. For magnetic control gear lamps should be mounted vertically.

This Product Specification contains data about typical performance at nominal power. Actual values may depend on ballast and applications. Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives.