




SHARK SPC FLOORING




Shark Flooring INC.

ADD: Block A, Guanghao International Center, Minzhi Street, Longhua District, Shenzhen,(518131)
Contact: Cris
Mob: +86-13823662015

PRODUCT INTRODUCTION

- SPC Flooring is made of poly materials,shaped by the processing of extruding,stable dimension,with water-proof performance.
- With specialized UV coating treatment,its stain-resistance,antibacterial and waterproof is highly enhanced,and fireproofing grade can even reach EN Class Bf1-s1.
- Using special transparent polymer wear-resistant layer, to ensure that the floor color is not worn for a long time, making the floor durable.

Click System

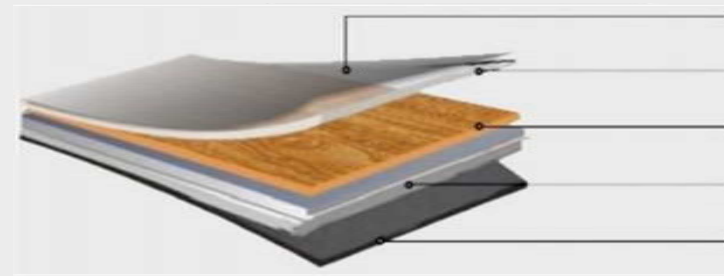

- UV Coating
- Wear Layer
- Film Layer
- Middle Material Layer
- Basematerial Layer





A Series

Page 03-08



C Series

Page 09-14



K Series

Page 21-25





SPC Flooring

A001



Size:	9 × 60 Inch
Thickness:	5.5 mm
Wear Layer:	0.3 mm
Underlayment:	1.5 mm





SPC Flooring

A002



Size:	9 × 60 Inch
Thickness:	5.5 mm
Wear Layer:	0.3 mm
Underlayment:	1.5 mm





SPC Flooring A003



Size:	9 × 60 Inch
Thickness:	5.5 mm
Wear Layer:	0.3 mm
Underlayment:	1.5 mm





SPC Flooring A004



Size: 9 × 60 Inch
Thickness: 5.5 mm
Wear Layer: 0.3 mm
Underlayment: 1.5 mm





SPC Flooring A005



Size: 9 × 60 Inch
Thickness: 5.5 mm
Wear Layer: 0.3 mm
Underlayment: 1.5 mm





SPC Flooring A006



Size:	9 × 60 Inch
Thickness:	5.5 mm
Wear Layer:	0.3 mm
Underlayment:	1.5 mm





SPC Flooring C001



Size:	9 × 60 Inch
Thickness:	6.5 mm
Wear Layer:	0.5 mm
Underlayment:	1.5 mm





SPC Flooring

C002



Size:	9 × 60 Inch
Thickness:	6.5 mm
Wear Layer:	0.5 mm
Underlayment:	1.5 mm





SPC Flooring

C003



Size:	9 × 60 Inch
Thickness:	6.5 mm
Wear Layer:	0.5 mm
Underlayment:	1.5 mm





SPC Flooring

C004



Size: 9 × 60 Inch
Thickness: 6.5 mm
Wear Layer: 0.5 mm
Underlayment: 1.5 mm





SPC Flooring C005



Size:	9 × 60 Inch
Thickness:	6.5 mm
Wear Layer:	0.5 mm
Underlayment:	1.5 mm





SPC Flooring

C006



Size:	9 × 60 Inch
Thickness:	6.5 mm
Wear Layer:	0.5 mm
Underlayment:	1.5 mm





SPC Flooring

K001



Size:	9×60 Inch
Thickness:	8 mm
Wear Layer:	0.5 mm
Underlayment:	2 mm





SPC Flooring K002



Size:	9×60 Inch
Thickness:	8 mm
Wear Layer:	0.5 mm
Underlayment:	2 mm





SPC Flooring K003



Size:	9×60 Inch
Thickness:	8 mm
Wear Layer:	0.5 mm
Underlayment:	2 mm





SPC Flooring K004



Size:	9×60 Inch
Thickness:	8 mm
Wear Layer:	0.5 mm
Underlayment:	2 mm





SPC Flooring K005



Size:	9×60 Inch
Thickness:	8 mm
Wear Layer:	0.5 mm
Underlayment:	2 mm



TECHNICAL DATA

Products Data		
Vinly flooring tile dimension	9" x 60"	
Thickness	5.5mm,6mm,6.5mm,8mm	
Wear layer thickness	0.3mm,0.5mm	
Surface finish	Matte	
Safety Criteria	Standard	Value
Flammability	EN13501-1	Bf 1
Slip Resistance	EN13893	DS
Formaldehyde Emission	EN717-1	None
Castor Wheel Test	EN425	Pass
Color Fastness	IS0105-B02	≥6
Determination of Migration of Heavy Metals	EN71	None
Perfomance	Standard	Value
Wear Resistance	EN-660-2	≤0.015g
Flexibility	EN435	No damage
Curling After Exposure To heat	EN434	≤1.2mm(80°C ,6hrs)
Peel Resistance	EN431	≥2.8Kgf/cm2
Dimensional Stability	EN434	≤0.08%(80°C,6hrs)
Residual Indentation	EN434	≤0.1mm

ACCESSORIES

	STAIR NOSE
	Size(mm): 2400*54*18
	Packing: 10pc/ctn
	Price:
	Weight: 11KGS
	

	T-MOLDING
	size: 2400x46x7mm
	Packing: 20pc/ctn
	Price:
	Weight: 10KGS
	

	REDUCER
	Size(mm): 2400*43*10
	Packing: 20pc/ctn
	Price:
	Weight: 14.3KGS
	

	QUARTER ROUND
	Size(mm): 2400*28*16
	Packing: 25pc/ctn
	Price:
	Weight: 16.26KGS
	

ADVANTAGES

 <p>100% RECYCLABLE 100% 可回收的</p>	 <p>IMPACT RESISTANCE Thick wear layer providing lasting quality 耐冲击 厚的耐磨层使用寿命长</p>
 <p>EASY CLEAN+STAIN RESISTANCE Anti-spill & easy to remove existing stain 容易清洁+ 防污 防溅和容易去除现有污渍</p>	 <p>ACOUSTIC FRIENDLY Reduce sound by more than 50% 防音 声音减少50%以上</p>
 <p>UV COATED Colour does not fade under sunlight. 紫外线涂层 颜色不容易褪色。</p>	 <p>QUICK.FIT EASY CLICK DESIGN Easy to install on flat surface or tiles 锁扣设计快速安装 在平地上易于安装</p>
 <p>ANTI-SLIP Slip resistance 防滑 防滑性</p>	 <p>SCRATCH+WEAR RESISTANCE Thick wear layer with double UV coating 耐刮, 耐磨 带双层UV处理的厚耐磨层</p>
 <p>NON-TOXIC+ODOURLESS No smell & not hazardous to health 无毒+无臭 没有异味, 对健康无害</p>	 <p>FIRE RESISTANCE B1 Level:Hard to burn 防火性 B1级别:很难燃烧</p>
 <p>WATERPROOF Highly resistance to water & moisture 防水 防水、耐潮</p>	 <p>ELECTRIC CURRENT RESISTANCE Does not conduct electricity 阻电 不导电</p>
 <p>INSECT PROOF Insect free due to composition of material 防虫 特殊材质, 可达到防虫效果。</p>	 <p>100% Formaldehyde Free Free from toxic chemical and toxic gas 100%不含甲醛 不含有毒化学物质和有毒气体。</p>



Chose Shark Flooring
for Better Life!



Fire-proof



Water-proof



Anti-scratch