


Signal-Wise: we get the signal right


Sound Viewer

Truck Exhaust Noise

Sound Viewer is capable of handling both airborne and structure-borne sounds, non-stationary and stationary sounds over the frequency range of 20 – 20,000 Hz.

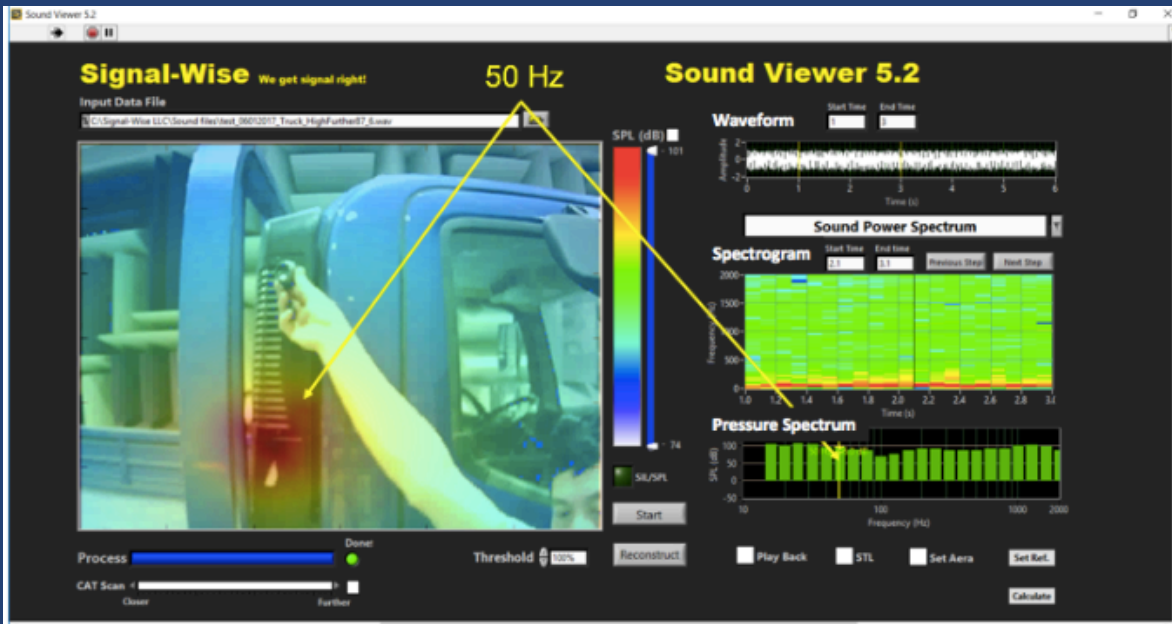


Truck exhaust pipe emitting low frequency noise in 1/3-octave bands centered at 50 Hz was located.

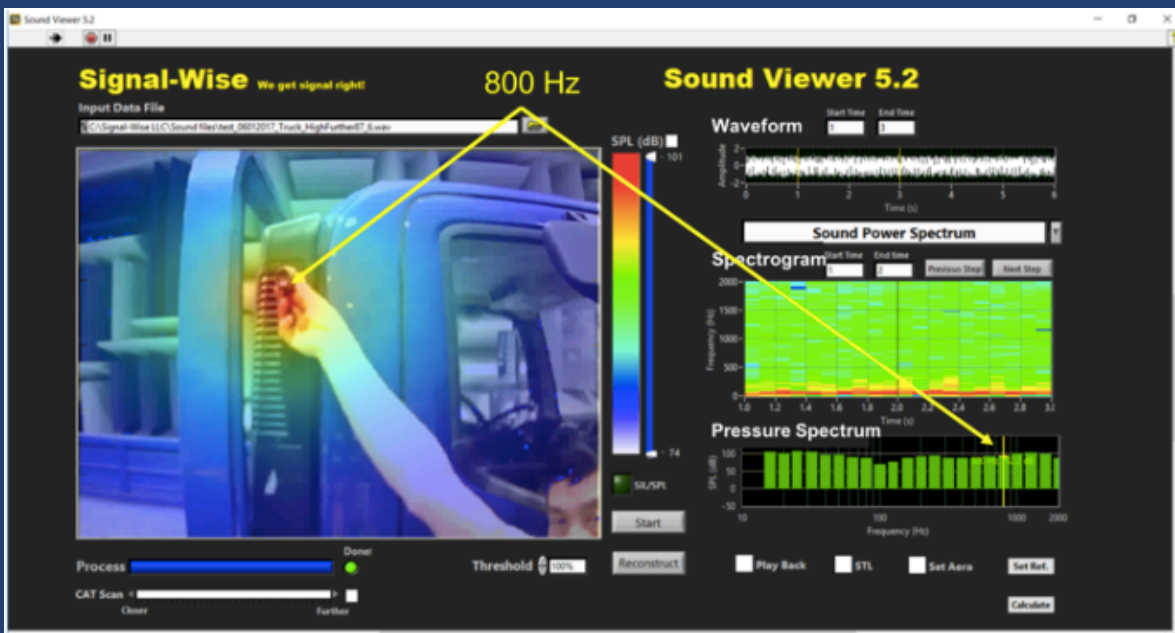

A blue-tooth speaker emitting sounds in 1/3-octave bands centered at 800 Hz was located.

Signal-Wise: we get the signal right

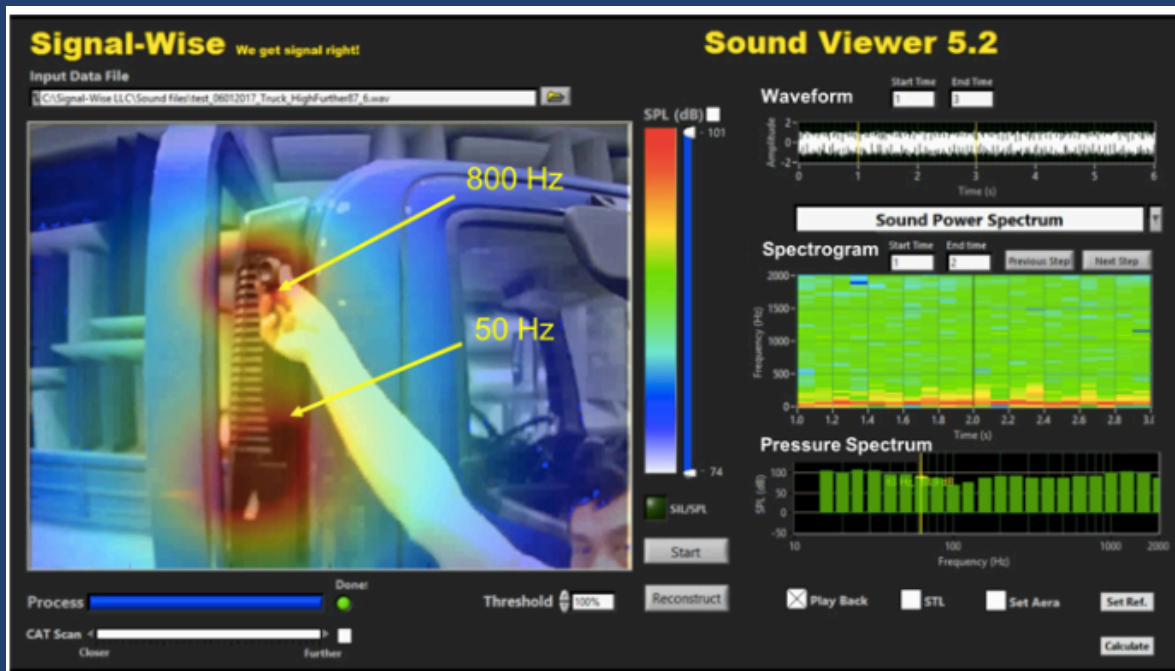

Sound Viewer is capable of locating multiple sound sources in 3D space simultaneously over the frequency range of 20 – 20,000 Hz.



Sound Viewer — A one-of-a-kind comprehensive noise diagnosis and analysis system