


UNLOADER VALVES - UU1 UNIVERSAL


The Legacy Universal Unloader is unique in that it allows for height or width adjustments making it ideal for any pump.



- PSI: 3500
- GPM: 6.0
- Temperature: 195°F
- Forged-Brass Body
- 1/2" NPT Inlet
- 3/8" NPT Outlet
- Stainless-Steel and low friction, wear-resistant plunger
- Weight: 16.1 oz.
- Patent US 8,313,311 B2



PART NO.	DESCRIPTION
9.175-018.0	 Legacy Universal Unloader (UU1)
Note: Legacy Universal Unloader (UU1) will not fit Legacy Pump GF 3530F	

Adjusting inlet port




1.- Push up inlet port to make it shorter.

2.- Pull down inlet port to make it longer.






Adjusting horizontal sliding connector



1.- Turn the connector clockwise direction to make it shorter.

2.- Turn the connector counterclockwise direction to make it longer.



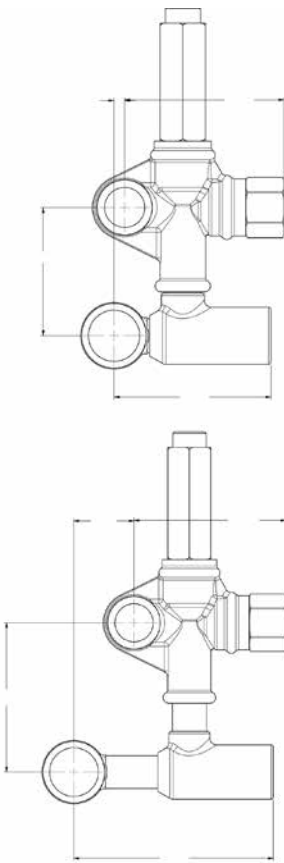


UNLOADER VALVES - VBT SERIES

A trapped pressure direct mount unloader valve.



- GPM: 6.6
- Temperature: 195°F
- Weight: 1.95 oz.
- Brass, Stainless, Buna-N

PART NO.	DESCRIPTION	CONNECTION	PSI	FITS PUMP
8.754-703.0	Universal, VBT Direct Mount	3/8" FPT Inlet x 3/8" MPT Outlet	1500	FOG
8.754-696.0	 Universal, VBT Direct Mount	1/2" FPT Inlet x 3/8" MPT Outlet	3000	LB, LP, LF
8.754-700.0	Universal, VBT Direct Mount	1/2" FPT Inlet x 3/8" MPT Outlet	4000	LB, LP, LF
8.754-701.0	Universal, VBT Direct Mount	1/2" FPT Inlet x 3/8" MPT Outlet	4000	LB, LP, LF
8.754-702.0	Universal, VBT Direct Mount	1/2" FPT Inlet x 3/8" MPT Outlet	4000	LM, LS



UNLOADER VALVES - APR SERIES

Integral Automatic Pressure Regulator for Admiral Pumps: WE - WG - WEL - XLS - XLE - XLG bolt on for Admiral and Legacy pumps. Trapped-pressure regulator specifically designed for use on the Admiral plunger pumps. Integral inlet, bypass and outlet eliminate the need for bypass hose.



- PSI: 3200
- GPM: 6.0
- Temperature: 195°F
- Forged-Brass Body
- 3/8" MPT Outlet
- Stainless-Steel Plunger and Seat Valve
- Weight: 29 oz.

8.703-401.0

PART NO.	DESCRIPTION	INLET
8.703-401.0	APR.I 25-Brass / Black	3/8"
9.802-365.0	APR.I 30-Brass / Black	1/2"
8.900-760.0	Seal Repair Kit	3/8"

UNLOADER VALVES - VR54/56

Basic valves, premium performance.



- Temperature: 194°F
- Forged-Brass Body
- Stainless-Steel Seat and Piston
- 3/8" MPT Inlet, Outlet & 3/8 FPT Bypass

VR54 Black Regulator / Unloader

- PSI: 2030
- Max PSI: 2175 PSI
- GPM: 8.0
- Weight: 15 oz.

VR54 Red Regulator / Unloader

- PSI: 2610
- Max PSI: 2900 PSI
- GPM: 8.0
- Weight: 13.7 oz.

VR56 Regulator / Unloader

- PSI: 3625
- Max PSI: 3400 PSI
- GPM: 8.0
- Weight: 15 oz.

Repair Kits

- For Use with VR54/VR56 Regulator/Unloaders

PART NO.	DESCRIPTION
8.753-028.0	VR54 Black with Knob
8.753-029.0	VR54 Red with Knob
8.753-017.0	VR56 with Knob

UNLOADER VALVES - VR53



- PSI: 3630
- GPM: 8.0
- Temperature: 194°F
- 3/8" FPT Inlet and Outlet, 1/4" FPT Bypass
- Adjustable Pressure Setting Nut
- Heavy-Duty Forged-Brass Body
- Stainless-Steel Ball and Valve Seat
- High-Temperature Viton Seals
- Adjustable Upper-Pressure Limit Lock

PART NO.	DESCRIPTION	PSI	GPM
8.753-027.0	VR53 without Knob	3630	8
8.753-026.0	VR53 with Knob	3630	8

UNLOADER VALVES - VR56/ VBA35 SERIES



Commonly used on Legacy HD Pumps.



VBA35

- PSI: 3500
- GPM: 6.6

VB56

- PSI: 3650
- GPM: 8.0

PART NO.	DESCRIPTION	PSI	GPM
VBA35 FOR LEGACY HD MODELS			
9.803-899.0	GG, GD, GE	3500	6.6
9.803-900.0	GM, GS	4000	6.6

UNLOADER VALVES - VB3

Commonly used on Legacy HD Pumps.



VB3

- PSI: 3200
- GPM: 6.5
- 3/8" NPT Inlet and Outlet and Bypass

PART NO.	DESCRIPTION	PSI	GPM
VBA35 FOR LEGACY HD MODELS			
8.725-384.0	VB3 3/8" NPT	3200	6.5




UNLOADER VALVES - VRT3 SERIES



Basic valves, premium performance.



- GPM: 8.0
- Temperature: 200°F
- Forged-Brass Body
- Stainless Internals
- 3/8" Inlet, Outlet, Bypass
- EZ Start models do not have dual inlets

PART NO.	DESCRIPTION	PSI	GPM
8.750-297.0	Yellow Spring	2320	8.0
8.750-298.0	Blue Spring	3630	8.0
8.750-299.0	 Black Spring	4500	8.0
8.750-300.0	 Black with EZ Start	4500	8.0
8.750-955.0	Black with Switch	4500	8.0
8.750-956.0	 Black with Knob Switch	4500	8.0
8.750-821.0	Blue Spring w/o Knob	3630	8.0

REPAIR KITS

8.750-709.0	Kit for Blue & Yellow Spring Unloaders	2320 / 3630	8.0
8.750-710.0	Kit for Black Spring Unloaders	4500	8.0
9.802-694.0	Old Style VRT3 Kit-605,606,607	Up to 4500	8.0

UNLOADER VALVES - VRT100 HIGH-VOLUME SERIES



- GPM: 26.4
- Temperature: 194°F
- 1/2" FPT, Inlet, Outlet & Bypass
- Stainless Internals
- Forged-Brass Body

PART NO.	DESCRIPTION	PSI	GPM
8.753-726.0	Blue with Knob	Up to 5075	26.4
8.753-443.0	Yellow without Knob	Up to 2760	26.4
8.753-444.0	Blue without Knob	Up to 5075	26.4
8.753-727.0	Blue with Microswitch 120 / 240 VAC - without Knob	Up to 5075	26.4
8.753-728.0	VRT100 Repair Kit	Up to 5075	26.4

UNLOADER VALVES - PULSAR RV SERIES



- GPM: 8.0
- Temperature: 195°F
- Pulsar RV Blue Rated 4050 PSI, Max PSI: 4500
- Pulsar RV White Rated 2300 PSI, Max PSI: 2600
- All Stainless-Steel Valves
- Pressure Actuated
- Forged Body
- 3/8" FPT Inlet, Outlet
- Two 3/8" FPT Bypass Ports

PART NO.	DESCRIPTION	GPM
8.754-867.0	Pulsar RV, White, with Knob	8.0
8.754-870.0	Repair Kit- Pulsar RV	8.0
8.754-866.0	Pulsar RV, Blue, without Knob	8.0
8.754-868.0	Pulsar RV, Blue, with Knob	8.0
8.754-869.0	Pulsar RV, Blue, with Knob & Switch	8.0
8.759-000.0	Unloader Valve with Switch	10.5

UNLOADER VALVES - PULSAR RZ - FLOW SENSITIVE



- PSI Max: 4050
- Temperature: 140°F
- Weight: 3.8 lbs.
- 1/2" FPT Inlet, Outlet
- 1/2" FPT Bypass Ports

PART NO.	DESCRIPTION	PSI
9.117-544.0	Flow Sensitive 5.3-21GPM Max 4	4050

UNLOADER VALVES - VB7 SERIES

Fits GP/Interpump 63 Series, CAT 4SF pumps as well as many other pumps requiring up to 8 GPM - 3650 PSI max pressure.



- PSI Max: 3650
- Temperature: 195°F
- Weight: 19.7 oz.

PART NO.	DESCRIPTION	PSI
8.712-741.0	without Knob, 3/8 MPT Inlet, 3/8 FPT Outlet & Bypass	3650
8.904-580.0	w/ Knob, 2.1 Fixed Inj., 3/8 MPT Inlet & Outlet	3650
8.704-488.0	Repair Kit	
8.712-735.0	Knob Only	



UNLOADER VALVES - VB8 SERIES



- Trapped Pressure
- 8 GPM
- 3200 MIN-3650 PSI Max
- Temp- 195 Deg

PART NO.	DESCRIPTION
9.802-362.0	w/ Knob & Switch, 5 Amp Microswitch, 3/8" MPT Inlet, 3/8" FPT Outlet & Bypass
8.757-462.0	w/o Knob, 3/8" MPT Inlet, 3/8" FPT Outlet

UNLOADER VALVES - VB130/135 SERIES



Trapped Pressure Unloader for the 51 & 60 Series pumps.
Fits CAT 2SF pumps as well as others.



- PSI Max: 2600
- Temperature: 195°F
- 3/8" MPT Inlet and Outlet
- 3/8" FPT Bypass
- Stainless-Steel Plunger
- Stainless-Steel Valve Seat
- Weight: 14.7 oz.

PART NO.	DESCRIPTION	TEMP
8.712-739.0	VB 130 Without Knob	195°F
8.904-579.0	VB-135- with Knob, Banjo Connection, Hollow Screw Fitting	195°F
9.802-006.0	Repair Kit	195°F
8.712-735.0	Knob Only	195°F

UNLOADER VALVES - VB85 / 280 SERIES



Fits CAT 2SF pumps and other pumps. This pressure sensitive regulating unloader is designed for single or multiple pumps, weep or multi-nozzle systems.



- GPM: 21
- Temperature: 200°F
- Pressure Actuated
- Forged-Brass Body
- Stainless-Steel Plunger and Seat
- 1/2" FPT Inlet, Outlet, Bypass
- Weight: 45 oz.

PART NO.	DESCRIPTION	PSI	GPM	MAX PSI
8.751-964.0	VB85/ YUB21405, Blue Spring	4050	21	4500
8.751-963.0	VB85/ YUW21235, White Spring	2300	21	2600

UNLOADER VALVES - VB80 / 400 STAINLESS-STEEL



- Rated PSI: 5800, Max PSI: 6500
- GPM: 21.0
- Forged Stainless-Steel Body
- All Stainless-steel Valve Parts
- Viton Seals
- 1/2" FPT Inlet, Outlet, Bypass

PART NO.	DESCRIPTION	GPM	TEMP
8.712-656.0	VB 80/400 - YU2158	21	195°F
9.802-007.0	Repair Kit	21	195°F

UNLOADER VALVES - VB200 HIGH-VOLUME SERIES

Fits CAT 2SF pumps and other pumps.



- PSI: 2175
- GPM: 52.5
- Temperature: 194°F
- Steel and Brass Body
- Large Plastic Knob (Removable)
- Lock Nut on Pressure Adjustment
- 1" FPT Inlet, Outlet, Bypass
- Two 5/16" - 18 Bolt Mounting Ports
- Hexagonal shaped check valve to avoid jamming
- Weight: 73.5 oz.

PART NO.	DESCRIPTION	PSI	GPM
8.712-754.0	VB 200 without Knob	2200	52.5
8.712-755.0	VB 200 with Knob	2200	52.5
9.117-632.0	VB200 Viton Oring without Knob		
8.704-583.0	Repair Kit	2200	52.5

UNLOADER VALVES - VB350 / VB7 SERIES

Bigger. Stronger. Faster - 5650 PSI.



- Rated PSI: 5075
- GPM: 10.0
- Temperature Max: 195°F
- Forged-Bronze Body
- Stainless-Steel Plunger and Valve Seat
- 3/8" FPT Outlet
- 1/2" F Bypass
- 3/8" MPT Inlet, 1/4" Gauge Port
- Weight: 31 oz.

PART NO.	DESCRIPTION	TEMP
9.802-360.0	Unloader, Red Knob (YU5075K)	195°F
9.800-106.0	Repair Kit, Red Knob	195°F
8.704-499.0	Repair Kit, Old VB 350	195°F



UNLOADER VALVES - VB75 / VB135 SERIES



VB75

- VB75
- Rated PSI- 3200, Max PSI 3650
- Temperature: 195°F
- 1/2" FPT Inlet, 1/4" FPT Gauge

VB135

- 3/8" FPT Inlet, 3/8" MPT Outlet and Bypass
- Weight: 19.7 oz.
- **VB135**
- Rated PSI: 2300, Max PSI: 2600
- Temperature:

The VB75 is an integrated unloader for Interpump and General Pump with 7.8 GPM - 3600 PSI max pressure. The VB135 fits Interpump "WW" Series pumps and General "TT" Series pumps with 6.5 GPM - 2600 PSI max pressure.

- 195°F
- 3/8" FPT Inlet, 3/8" MPT Outlet
- 6.5 GPM
- Stainless Internals
- Forged-Brass Body
- Weight: 22.9 oz.

PART NO.	DESCRIPTION
VB75	
8.712-742.0	VB75 Direct Mount Control Set for EZ, 47, 60, 63 & W151 Series
8.704-488.0	Seal Kit
8.712-735.0	Knob Only
8.705-934.0	1/2" Bolt with Hole
VB135	
8.712-659.0	VB135- Direct Mount Control Set for WW & TT Series Pumps
8.712-735.0	Knob Only
9.802-006.0	VB 135 Repair Kit
8.705-935.0	3/8" Bolt with Hole

UNLOADER VALVES - VB9 / VB10 TRAPPED PRESSURE SERIES



- PSI: 3600
- Rated PSI: 3200

- GPM: 8.0
- Instant Pressure Response
- Hex-Shaped Non-stick Check Valve
- 3/8" FPT Inlet, Outlet, Bypass
- Brass Valve Body / Stainless Ball
- and Seat
- Knob Included
- VB9 - Panel Mountable
- Reduces trapped pressure to 25% of operating pressure when unloading; allows easier gun trigger pull

PART NO.	DESCRIPTION
8.712-736.0	VB9 with Knob - YVB9K
8.715-462.0	VB9 with Knob and Pressure Switch - YVB9KMS2
8.715-489.0	VB9 with Check Valve and Pressure Switch - YVB9KMSS
8.712-745.0	VB10 with Knob - YU3678
8.704-548.0	Repair Kit VB9
8.704-561.0	Repair Kit VB10

UNLOADER VALVES - CONTROL SET "W" SERIES



Integrated Regulator & Unloader designed exclusively to fit Interpump & General Pump pumps.



- Mounts directly on pump inlet and outlet; internal bypass loop
- Pressure Actuated: "Instant-On"
- 3/8" MPT Inlet & Outlet, 1/4" HB (8.712-638.0, 8.712-643.0)
- 1/2" FPT Inlet, 3/8" MPT Outlet, 1/4" HB (8.712-644.0, 8.712-642.0, 8.712-647.0)
- Integrated Injector - Optional
- Pressure and flow-engineered for specific pump models

PART NO.	MODEL	GPM	PSI	PUMP
"W" SERIES UNLOADERS WITHOUT INJECTORS				
8.712-638.0	W1	3.0	1600	W905
8.712-643.0	W2	4.5	3000	W997
8.712-644.0	W2-L	6.0	3000	W201
"W" SERIES UNLOADERS WITH INJECTORS				
8.712-642.0	W2-1	4.5	3000	W997
8.712-645.0	W2L-1	4.5	3000	W201
8.712-647.0	W2L-2	6.0	3000	WS202

UNLOADER VALVES - KITS FOR K / ZK SERIES



Repair Kits for all K3, K5, K7 and K9 models.

PART NO.	DESCRIPTION
8.702-847.0	K5/K58 Maintenance Kit
8.702-849.0	K5/K60 Rebuild Kit
8.705-045.0	K5 Back Nut 3/4" NPT
8.702-858.0	K7/K70 Repair Kit
8.702-911.0	K9/K121 Repair Kit

UNLOADER VALVE - FLOW SENSITIVE



- Rated PSI: 4060
- GPM: 21.0
- Temperature Max: 185°F
- Forged-Bronze Body
- 1/2" FPT Outlet
- 1/2" F Bypass
- Weight: 2.87 lbs..

PART NO.	DESCRIPTION	TEMP
9.116-794.0	ZH288 Green Spring	185°F

UNLOADER VALVES - K / ZK SERIES

Unloaders relieve line pressure in bypass mode.



ZK3 / ZK5

- Temp: 165°F
- 3/8" FPT Inlet
- ZK3: 1500 PSI
- ZK5: 3000 PSI

ZK1

- Temp: 165°F
- 3/8" FPT Inlet
- 3600 PSI
- GPM: 2.3 - 10.8

ZK7

- Temp: 165°F
- 3/8" FPT Inlet
- 3500 PSI
- GPM: 2.11 - 10.8

ZK9

- Temp: 165°F
- 1/2" FPT
- 5800 PSI
- GPM 2.5 TO 13.2

PART NO.	MODEL	GPM	OUTLET
ZK1			
8.712-602.0	ZK138	2.30 - 10.80	3/8" M
8.712-601.0	ZK1	2.30 - 10.80	1/2" M
ZK3			
8.712-603.0	ZK3.0	2.10 - 3.00	3/8" M
8.712-605.0	ZK3.1	3.00 - 3.22	3/8" M
8.712-607.0	ZK3.2	4.22 - 5.55	3/8" M
8.712-609.0	ZK3.3	5.00 - 6.50	3/8" M
8.712-604.0	ZK3.0	2.10 - 3.00	1/2" M
8.712-606.0	ZK3.1	3.00 - 4.22	1/2" M
8.712-608.0	ZK3.2	4.22 - 5.55	1/2" M
8.712-610.0	ZK3.3	5.00 - 6.50	1/2" M
ZK5			
8.712-611.0	ZK5.1	3.00 - 4.22	3/8" M
8.712-613.0	ZK5.2	4.22 - 6.60	3/8" M
8.712-615.0	ZK5.3	6.60 - 10.83	3/8" M
8.712-612.0	ZK5.1	3.00 - 4.22	1/2" M
8.712-614.0	ZK5.2	4.22 - 6.60	1/2" M
8.712-616.0	ZK5.3	6.60 - 10.83	1/2" M
8.715-478.0	Bypass plate for ZK3 / ZK5		
Note: 1. Use 8.705-045.0 back nut on bypass nipple when mounting 1/2" bypass line on ZK3 and ZK5 series. 2. Use restricted .156-.225 ID orifice in bypass line for smoother operation / pressure balancing.			
ZK7			
8.712-617.0	ZK7.0	2.11 - 3.00	3/8" M
8.712-618.0	ZK7.1	3.00 - 4.22	3/8" M
8.712-619.0	ZK7.2	4.22 - 6.60	3/8" M
8.712-620.0	ZK7.3	6.60 - 10.8	3/8" M
8.701-389.0	ZK7 - #1 Bypass Orifice 2.5 mm		
Z9			
8.712-621.0	ZK9	2.50 - 13.20	1/2" M

UNLOADER VALVES - HM MODEL



- Pressure Adjustable: 0-3000 PSI
- Flow Range: 1.4 to 10.8 GPM
- Temperature: 185°F
- 3/8" FPT Inlet, Bypass, 3/8" MPT Outlet
- Excess Flow Bypassed to Maintain Selected Pressure
- Operates on Single / Multiple Gun Systems
- Brass Body, Stainless-Steel Valve & Seat

PART NO.	DESCRIPTION	PSI	GPM
8.712-622.0	HM Regulator / Unloader	0-3000	1.3-10.8
8.702-860.0	Repair Kit #72	0-3000	1.3-10.8

UNLOADER VALVES - HYPRO-STYLE



- PSI: 400 to 1500
- GPM: 5.0
- Temperature: 180°F
- 3/8" MPT Inlet and Outlet
- Buna Seals
- Weight: 8 oz.

PART NO.	PRESSURE	BYPASS	GPM
8.712-689.0	200-500	1/4" FPT	5.0
8.712-690.0	400-1000	1/4" FPT	5.0
8.712-691.0	800-1500	1/4" FPT	5.0
8.712-692.0*	400-1000		5.0
8.722-643.0	Repair Kit for All		
*Bypass port not threaded, closed coupled			

UNLOADER VALVES - YU HIGH VOLUME



- GPM: 21.0
- Temperature: 200°F
- 1/2" FPT Inlet and Outlet
- Two 1/2" FPT Bypass Ports
- Forged-Brass Body
- Stainless-Steel Internals

YU-21235 YELLOW SPRING

- PSI: 2300
- Rated Pressure: 2600 Max

YU-21405 GREEN SPRING

- PSI: 4050
- Rated Pressure: 4500 Max

PART NO.	DESCRIPTION	PSI
8.753-326.0	YU-21235 Yellow Spring	2600
9.116-794.0	YU-21405 Green Spring	4500

UNLOADER VALVES - ST-230


- PSI: 500 - 3600 PSI
- GPM: 8.0
- Temperature: 200°F
- 1/4" FPT Inlet and Bypass
- Mounts Off-Line - No Line Restrictions
- Brass Body, Stainless-Steel Piston & Seat
- Weight: 14 oz.

PART NO.	DESCRIPTION	GPM	TEMP
8.712-628.0	ST-230	8	200°F
8.757-359.0	Repair Kit	8	200°F

NOTE: Tamper proof wire and seal are not included

UNLOADER VALVES - ST-280


- PSI: 500 - 4060
- GPM: 8.0
- Temperature: 175°F
- Brass Housing, Stainless-Steel Valve
- 3/8" FPT Inlet, Outlet and 1/4" FPT Bypass
- Weight: 22.5 oz.

PART NO.	DESCRIPTION	PSI	GPM
8.712-674.0	ST-280	3600	8
8.701-654.0	Piston Seal Kit "C"	3600	8
8.701-653.0	Check Valve Kit "A"	3600	8

UNLOADER VALVES - ST-261 SERIES

ST-261 STD

ST-261/S

ST-261/I

ST-261/SI

ST-261 Bypass Switch Only
ST-261 STANDARD

- PSI Regulation: 0-3600
- GPM: 1.0 - 8.0
- Temperature: 176°F
- 3/8" FPT Inlet & Outlet
1/4" FPT Bypass
- Stainless-Steel Plunger and Seat
- Forged-Brass Body and Viton Seals
- Weight: 22.5 oz.

ST-261 / S UNLOADER WITH BYPASS
ST-261 / I - UNLOADER WITH CHEMICAL INJECTORS
ST-261 / SI UNLOADER WITH SWITCH AND INJECTOR

- Micro Switch Specs; 115 VAC, 5A / 230 VAC, 3A
- Temperature: 176°F
- 3/8" FPT Inlet & Outlet
1/4" FPT Bypass & Aux Port
- Siphon Rate- 10-1
- Switches at full bypass flow
- Wired N/C (may be wired N/O)

ST-261 BYPASS SWITCH (ONLY)

- Field-Mountable
- 10 AMP, 115 / 230V
- Switches at full bypass flow
- Wired N/C (may be wired N/O)

PART NO.	DESCRIPTION	PSI	GPM
ST-261 STANDARD			
8.712-681.0	ST-261 STD	0-3600	8
8.701-627.0	Repair Kit "B"	0-3600	8
8.701-650.0	Outlet Check Kit "A"	0-3600	8
ST-261 / S- UNLOADER WITH BYPASS MICRO SWITCH			
8.712-685.0	ST-261 / S	500-3625	8
8.701-647.0	Switch Seal Kit		
ST-261 / I- UNLOADER WITH CHEMICAL INJECTORS			
8.712-682.0	ST-261 / I / 1.8 mm	500- 3650	1.50-2.25
8.712-683.0	ST-261 / I / 2.1 mm	500- 3650	2.25-3.35
8.712-684.0	ST-261 / I / 2.4 mm	500- 3650	3.35-5.00
8.900-159.0	Injector Repair Kit without Barb		
8.701-648.0	Injector Repair Kit with Barb		
ST-261 / SI- UNLOADER WITH MICRO SWITCH & INJECTORS			
8.712-686.0	ST-261 / SI-1		1.50-2.25
8.904-577.0	ST-261 / SI-3		3.35-5.00
ST-261 BYPASS MICRO SWITCH & KIT			
8.712-629.0	Complete Micro Switch Assembly		
8.701-647.0	Seal Kit - Micro Switch		

UNLOADER VALVES - AR BOLT-ON



- PSI Rated Pressure: 2600
- Fits RC, XT & XM Series Pumps
- 1/2" F Inlet
- 3/8" M Outlet

PART NO.	DESCRIPTION	GPM	BYPASS
8.712-582.0	AR20608 (4/B)	3.0-5.5	Aluminum, No Injector
8.712-564.0	AR20821 (3/B)	2.0-5.0	Aluminum, No Injector
8.712-573.0	AR20890 (4/B)	2.0-3.0	Aluminum, 2.0 Adj Injector
8.712-576.0	AR21039 (4/B)	2.0-3.0	Brass 2.0 Adj Injector
8.712-575.0	AR21040 (4/B)	3.0-4.0	Brass 2.2 Adj Injector
8.720-676.0	Seal Kit (4/B)		

Note: AR has discontinued the Combiset unloaders. Use Mini-Mate unloaders as replacements. For 22 mm twist coupler outlet models, add Part No. 8.709-546.0 (3/8" x 22 mm) to injector outlet.

UNLOADER VALVES - GYMATIC - 3/B & VR35 3/B SERIES



- PSI Rated Pressure: 3650
- GPM: 3.0-5.5
- Fits RK, RR, SXM, XM Series Pumps
- 3/8" M Outlet

PART NO.	DESCRIPTION	INLET
8.712-565.0	AR20242 (3/B)	1/2" F without Injector
8.712-563.0	AR20242G (3/B)	3/4" GHT & Filter, without Injector
8.712-574.0	AR20081 (3/B)	1/2" M Fixed Injector, 1.8 mm
8.712-567.0	AR20082 (3/B)	1/2" M Fixed Injector, 2.0 mm
8.712-568.0	AR20399 (3/B)	1/2" M Adj Injector, 1.8 mm
8.712-569.0	AR20400 (3/B)	1/2" F Adj Injector, 2.0 mm
8.720-642.0	AR2611 (3/B)	Repair Kit

AR21669 - VR35 3/B

- PSI Max: 4000
- Brass Bypass
- 3/8" M
- GPM: 5.0
- 1/2" M Inlet
- Without Injector

AR24760 - VR35 3/B

- PSI Max: 4000
- Brass Bypass
- 3/8" M Outlet
- GPM: 5.0
- 1/2" F Inlet
- Without Injector

PART NO.	DESCRIPTION	INLET	OUTLET
8.712-583.0	AR21669	1/2" M	3/8" M
8.720-903.0	AR24760	1/2" F	3/8" M

UNLOADER VALVES - 22900A PRESSURE ACTUATED SERIES



- Minimum PSI: 375 (Max PSI Listed Below)
- GPM: 2.2 - 13.0
- Temperature: 160°F
- Bellville Spring Washers Minimize Spikes
- Forged-Brass Bodies, Stainless Ball and Seat
- Four 1/4" Side Ports Enhance Versatility
- 1/2" FPT Inlet, Outlet and Bypass Ports
- Weight: 57.3 oz.

PART NO.	MODEL NO.	MAX GPM	MAX PSI	SPRING
8.712-709.0	22910A	13	800	Silver
8.712-710.0	22911A	13	1400	Yellow
8.712-711.0	22912A	13	2400	Red
8.712-708.0	22913A	13	3000	Orange
8.722-137.0	Repair Kit- 012099			

UNLOADER VALVES - APM PRESSURE ACTUATED SERIES



- Temperature: 160°F
- Unloads pressure in entire system when in bypass
- Forged-Brass Bodies
- Stainless-Steel Seat
- 3/8" FPT Inlet
- 3/8" FPT Outlet
- 1/4" FPT Bypass & Gauge Port

PART NO.	MODEL NO.	GPM	PSI
8.712-705.0	22760APM	8	145-3045
8.712-706.0	22765APM	5	580-4000

UNLOADER VALVES - FLOW-ACTUATED



Designed for any pump that fits within the flow and pressure range of the unloader.



- Temperature: 160°F
- Unloads pressure in entire system when in bypass
- Forged-Bronze Body, Stainless-Steel Seat
- 3/8" FPT Inlet, 3/8" MPT Outlet
- 1/2" FPT Bypass

PART NO.	MODEL NO.	GPM	PSI
8.712-698.0	22650	3.0-4.5	0-3000
8.712-701.0	22654A	3.5-4.8	3000-4000
8.712-702.0	22655	4.5-5.5	0-3000
8.712-703.0	22656	4.5-6.5	0-3000
8.722-204.0	Seal Kit- 22666		

PRESSURE RELIEF VALVES - SR/S3



For use as a backup to an unloader or main relief in an open system without a trigger operated spray gun.



- S-R Safety Valve:
PSI: 3000
GPM: 1.3 to 10.0
3/8" M Inlet, 1/4" F Outlet
- S-3 Safety Valve:
PSI: 500 to 10,000
GPM: 2.6 to 26.4
1/2" M Inlet, Side Discharge
- Bypass and Outlet
- Stainless-Steel Plunger and Seat
- Machined-Brass Bodies
- Adjustable Pop-Off Protection

PART NO.	DESCRIPTION	TEMP
8.711-215.0	S-R Valve/ ZKSR	165°F
8.711-227.0	S-3 Valve/ ZKS3	284°F

UNLOADER VALVES - MG4000 SERIES

"The world's best unloader value" with a choice of PSI: 1500, 3000 or 4500.



- PSI: Up to 4500 PSI
- GPM: 10.0
- Temperature: 200°F
- Forged-Brass Body
- 3/8" FPT Inlet, Outlet and Bypass
- Auxiliary 1/4" Outlet
- Can be panel mounted
- Pressure limit indicated with color coded ring

PART NO.	DESCRIPTION	GPM	PSI
WITHOUT KNOB			
8.712-715.0	Yellow	10	1500
8.712-724.0	Black	10	4500
WITH KNOB			
8.712-716.0	Yellow	10	1500
8.712-719.0	Red	10	3000
8.712-725.0	Black	10	4500
8.704-567.0	Repair Kit- 463104K		



MG4000 WITH MICROSWITCH

- 15 Amp Microswitch
- Panel Mountable
- Use for time-delay shutdown or as burner control
- Can be used as Normally Open (NO) or Normally Closed (NC)

PART NO.	DESCRIPTION	GPM	PSI
8.712-720.0	Red	15	3000
8.712-714.0	Blue	15	4000
8.712-727.0	Black	15	4500

PRESSURE RELIEF VALVES - TIMAX



- PSI Max: 870
- GPM Max: 53
- 3/4" F Inlet, 1/2" F, 1" F Bypass
- 1" FPT Bypass
- Brass-Body, Stainless-Steel Piston and Seat

PART NO.	DESCRIPTION	GPM	PSI
8.712-624.0	Timax Regulator Valve	53	870
8.702-844.0	Repair Kit		

NOTES: Lever control manual dump for bypass to relieve line pressure



PRESSURE RELIEF VALVES - VS 200 / 180, HIGH PSI



Prompt and effective damping against pressure spikes



- Rated PSI: 2600, Max PSI: 2900
- GPM: 52.5
- Temperature: 194°F
- 3/4" FPT Inlet x 1/2" FPT Bypass
- Weight: 29.4 oz.

PART NO.	MODEL NO.	GPM
8.712-753.0	VS 200/180	52.5
8.704-582.0	Repair Kit	

PRESSURE RELIEF VALVES - VS 350, HIGH PSI



Prompt and effective damping against pressure spikes. Perfect For Multiple Gun Applications as well.



- PSI: 5600
- Rated PSI: 5100
- GPM: 6.5
- Temperature: 195°F
- 3/8" FPT Inlet, Outlet and Bypass
- Weight: 16.8 oz.

PART NO.	MODEL NO.	GPM	PSI
8.712-756.0	VS 350	6.5	5600

PRESSURE RELIEF VALVES - VS 220



- PSI Max: 3600
- Rated PSI: 3200
- GPM: 6.3
- Temperature: 200°F
- Two 3/8" FPT inlets
- 3/8" FPT Outlet and Bypass
- Forged-Bronze Body
- Stainless-Steel Plunger and Seat Valve
- Compact Design
- Weight: 14.2 oz.

PART NO.	MODEL NO.	GPM	PSI
8.712-737.0	VS220	6.3	3600

PRESSURE RELIEF VALVES - VS 500, HIGH PSI



- PSI Max: 8100
- Rated PSI: 7250
- GPM: 21
- Suitable to be utilized as a safety valve
- Temperature: 195°F
- Internals: Stainless-steel
- Brass Body and Fittings
- 1/2" FPT Inlet and 3/8" FPT Bypass
- Weight: 14.2 oz.

PART NO.	MODEL NO.	GPM	PSI
8.712-757.0	VS 500	21	8100

REGULATING RELIEF VALVE

Economical replacement for paraplate BR5 series.



- Adjustable Pressure: 200-2000 PSI
- GPM: 7
- Temperature: 200°F
- 3/8" FPT Inlet, Outlet and Bypass
- Flow-Thru Design for Smooth Operation
- Machined-Brass Body and Knob
- Stainless-Steel Plunger and Seal

PART NO.	DESCRIPTION	GPM	PSI
8.712-625.0	Relief Valve	7	200-2000

UNLOADER VALVES - MOUNTING BLOCK



End vibration-caused fitting failure.



- GPM: 12
- Mounting Hardware Included
- Machine Block Brass or Steel

PART NO.	DESCRIPTION	MATERIAL	PSI
8.904-568.0	3/8" x 3/8"	Brass	5500
8.904-567.0	1/2" x 1/2"	Brass	5500
9.802-870.0	3/8" x 3/8"	Steel	
9.802-871.0	1/2" x 1/2"	Steel	

CHEMICAL INJECTORS - AMERIMAX SERIES

The higher rate injector. Our best seller!

Legacy



- PSI: 3500
- Brass Housing
- Stainless-steel Orifice & Spring
- Fully Adjustable Metering Valve
- 3/8" MPT Inlet, Outlet
- 1/4" Hose Barb

PART NO.	DESCRIPTION	GPM	PSI
STANDARD			
8.904-192.0	"0"	1.0-2.0	3500
8.904-193.0	"1"	2.0-3.0	3500
9.803-998.0	S "2"	3.0-5.0	3500
8.904-194.0	S "3"	5.0-8.0	3500
8.900-040.0	Repair Kit Stainless-steel Check Ball		
"ACID" INJECTOR WITH SPECIAL INLET CHECK VALVE			
8.904-202.0	"1A"	2.0-3.0	3500
8.904-203.0	S "2A"	3.0-5.0	3500
8.904-204.0	S "3A"	5.0-8.0	3500
8.700-536.0	Ceramic Ball for 8.904-203.0		
8.900-041.0	S Acid Repair Kit*		

*Ceramic Check Ball

CHEMICAL INJECTORS - STAINLESS-STEEL



- PSI: 5000
- Stainless-Steel

PART NO.	DESCRIPTION	GPM	PSI
9.802-217.0	Non-Adjustable, Injector Only	3.0-5.0	5000

CHEMICAL METERING VALVES - ST-61 **SUTTNER**



- Max Temperature: 140°F
- GPM: .27
- 1/4" Hose Barb
- Teflon® Seals
- Glass-Filled Polyamide Body and Valve Parts
- Adjusts From Off to Full Flow
- Snap-on attachment to ST-60, ST-62, ST-261/1

PART NO.	DESCRIPTION
8.710-777.0	ST-61, 1/4" Hose Barb, Teflon® Seals

CHEMICAL INJECTORS - AMERIMAX SERIES - QUICK-COUPLED ASSEMBLIES

Legacy

Assembled for added convenience - quick couples to unloader outlet and quick couples hose to injector outlet.



- Top quality quick couplers: 3/8" Plug Inlet 3/8" Socket Outlet
- 6" industrial-grade poly-braid reinforced tubing (will not collapse, resists crimping, high-chemical tolerance)
- Heavy-duty brass chemical filter with check valve prevent loss of prime

PART NO.	DESCRIPTION	GPM
AMERIMAX "QC"		
8.904-195.0	Quick-Coupled "0"	1.0-2.0
8.904-196.0	Quick-Coupled "1"	2.0-3.0
8.904-197.0	S Quick-Coupled "2"	3.0-5.0
8.904-199.0	Quick-Coupled "3"	5.0-8.0
8.900-040.0	Repair Kit Stainless-steel Check Ball	
AMERIMAX ACID "QC"		
8.904-206.0	Quick-Coupled "1A"	2.0-3.0
8.904-207.0	S Quick-Coupled "2A"	3.0-5.0
8.904-208.0	Quick-Coupled "3A"	5.0-8.0
8.900-041.0	Acid Repair Kit*	

*Ceramic Check Ball

CHEMICAL INJECTORS - ST-60 SERIES

SUTTNER

Requires ST-61 Metering Valve to regulate the chemical injection rate.



- Forged-Brass Body
- Compact Size
- PSI: 3600
- Siphon Rate: 10:1
- 3/8" MPT Inlet
- 3/8" FPT Outlet

PART NO.	DESCRIPTION	GPM	ORIFICE
8.710-476.0	S ST 60/0	1.50-2.25	1.8 mm
8.710-477.0	ST-60/1	2.25-3.25	2.1 mm
8.710-478.0	ST-60/2	3.25-5.00	2.4 mm
8.701-648.0	Repair Kit with Barb-"F"		

CHEMICAL INJECTORS - FIXED



- Max PSI: 4500
- GPM: 3.0 - 8.0
- 3/8" FPT Inlet & Outlet
- 190° F
- Hose Barb 1/4"

PART NO.	MODEL NO.	GPM	PSI
8.710-489.0	G.P. #100775	3.0 to 5.0	4500
8.710-490.0	G.P. #100776	5.0 to 8.0	

CHEMICAL INJECTORS - ST-64, UP STREAM



Apply soap at high pressure. Restricts waterflow to create suction. Used on Pressure Pro Equipment as well as other major manufacturers.

- PSI: 140
- Temperature: 160°F
- 3/4" FGH Inlet, 3/4" MGH Outlet
- Chemical strainer and 4' PVC tubing included
- Adjustable with ST-61 Metering Valve
- Locking Waterflow Adjustment



PART NO.	MODEL NO.	GPM	PSI
8.710-482.0	ST-64 Up Stream Injector	1.5-4.0	140
8.710-483.0	ST-64 Up Stream Injector	4.0-7.0	140

CHEMICAL INJECTORS - ROBOKIM

- Rated PSI: 3200
Max PSI: 3500
- Max Temperature: 210°F
- 3/8" MPT Inlet, Outlet
- 1/4" Hose Barb
- Stainless-Steel Orifice
- Stainless-Steel Inlet Check Valve Components



PART NO.	MODEL NO.	GPM	PSI	ORIFICE
ROBOKIM WITH PLASTIC METER KNOB				
8.710-497.0	Chemical Injector "0"	2.1-2.9	3500	2.0 mm
8.710-498.0	Chemical Injector "1"	2.9-4.0	3500	2.2 mm
8.710-499.0	Chemical Injector "2"	4.0-5.5	3500	2.5 mm
8.710-500.0	Chemical Injector "3"	5.5-10.8	3500	2.75 mm
8.704-708.0	Repair Kit, RoboKim			

CHEMICAL INJECTORS - ST-62 VARIABLE



Flow orifice adjusts for machines from 2-8 GPM. Requires ST-61 to regulate chemical injection rate.



- Max PSI: 36500
- GPM: 2.0 - 8.0
- Forged-Brass Body
- 3/8" FPT Inlet & Outlet

PART NO.	MODEL NO.	GPM	PSI
8.710-485.0	ST-62	8	3600
8.701-648.0	Repair Kit with Barb-"F"		

CHEMICAL INJECTORS - ROBOKIM QUICK-COUPLED ASSEMBLIES



- Quick-Couplers:
3/8" QC Plug Inlet
3/8" QC Socket Outlet
- 6" industrial-grade poly-braid reinforced tubing
- AP brass chemical filter with stainless-steel check valve

PART NO.	DESCRIPTION	GPM
ROBOKIM "QC" WITH PLASTIC KNOB		
8.904-209.0	Chemical Injector "0"	2.1-2.9
8.904-210.0	Chemical Injector "1"	3.0-4.0
8.904-211.0	Chemical Injector "2"	4.0-5.5
8.904-212.0	Chemical Injector "3"	5.5-10.8
ROBOKIM "QC" WITH BRASS KNOB		
8.904-217.0	Chemical Injector "0"	2.1-2.9
8.904-218.0	Chemical Injector "1"	3.0-4.0
8.904-219.0	Chemical Injector "2"	4.0-5.5
8.904-220.0	Chemical Injector "3"	5.5-10.8

CHEMICAL INJECTORS - HI-LO

May be used on high or low side of pump. Adjustable flow orifices plus adjustable chemical valves. Standard features similar to ST-62.

- Performance Range:
Low Side/Upstream: PSI: 10-120, GPM: .5-3.5
High Side/Downstream: PSI: 3500, GPM: 2.0-8.0
- Max Temperature: 180°F
- Machined-Brass Body
- 3/8" FPT Inlet, Outlet



PART NO.	MODEL NO.	GPM	PSI
8.710-486.0	Hi / Lo Injector with Meter Valve	2.0-8.0	3500
8.710-487.0	without Chemical Adjust	2.0-8.0	3500
8.700-290.0	Repair Kit		

CHEMICAL INJECTORS - 400 SERIES

The injector of choice.



- PSI: 3200
- Temperature: 200°F
- Forged-Brass Housing
- Teflon® Valve Seat
- 3/8" Inlet, Outlet (3 Configurations)
- Renewable Orifices and Check Valve
- Options Include: Quick-Coupled, Stainless-Steel Orifices, Acid-Resistant Check
- Weight: 5 oz.

**ORIFICE SELECTION**

ORIFICE DIA.	DESCRIPTION	GPM / FLOW RATE	PSI
1.6 MM	3/8" Inlet / Outlet	1.5-2.7	3200
1.8 MM	3/8" Inlet / Outlet	2.0-3.6	3200
2.1 MM	3/8" Inlet / Outlet	2.7-4.9	3200
2.3 MM	3/8" Inlet / Outlet	3.3-6.0	3200

ADJUSTABLE INJECTORS, PRECISE NEEDLE-METERING VALVE

ORIFICE SIZE	M X M PART NO.	M X F PART NO.	F X M PART NO.
BRASS BODY			
1.6	8.710-541.0	8.710-549.0	8.710-559.0
1.8	8.710-535.0	8.710-543.0	8.710-551.0
2.1	8.710-537.0	8.710-545.0	8.710-554.0
2.3	8.710-539.0	8.710-547.0	8.710-557.0
BRASS BODY / STAINLESS-STEEL INSERT			
1.6	-	-	8.710-560.0
1.8	8.710-536.0	8.710-544.0	8.710-552.0
2.1	8.710-538.0	8.710-546.0	8.710-556.0
2.3	8.710-540.0	8.710-548.0	-
BRASS BODY / ACID-RESISTANT			
1.6	8.904-230.0	-	-
1.8	8.904-224.0	8.904-232.0	-
2.1	8.904-226.0	8.904-234.0	8.904-242.0
2.3	8.904-228.0	8.904-236.0	-
BRASS BODY / STAINLESS-STEEL INSERT / ACID-RESISTANT			
1.6	-	-	-
1.8	8.904-225.0	8.904-233.0	8.904-241.0
2.1	8.904-227.0	8.904-235.0	-
2.3	8.904-229.0	-	-

PART NO.	DESCRIPTION
REPAIR KITS INCLUDE CHECK BALL, SPRING, SEAT AND O-RING	
8.900-769.0	Standard Kit
8.900-770.0	Acid Kit

CHEMICAL INJECTORS - STAINLESS-STEEL



- PSI: 5500
- Temperature: 190°F
- 3/8" MPT Inlet, Outlet
- 1/4" Hose Barb
- 1.8 mm Orifice
- Weight 8.0 oz.
- High Draw: 20%

PART NO.	MODEL NO.	GPM	PSI
9.112-213.0	Chemical Injector	2.0-3.0	5500

CHEMICAL INJECTORS - 505 SERIES STAINLESS-STEEL



All metal parts are stainless-steel



- PSI: 5650
- GPM: 8.0
- Temperature Max: 195°F
- 3/8" Inlet, Outlet
- Premier Type Injector
- Teflon® O-Rings

PART NO.	MODEL NO.	GPM	PSI
8.710-586.0	Stainless-steel Injector 1.8	2.0-2.6	5650
8.710-587.0	Stainless-steel Injector 2.1	2.6-4.0	5650
8.710-588.0	Stainless-steel Injector 2.3	4.0-5.3	5650
8.704-027.0	Repair Kit		

CHEMICAL INJECTORS - ADJUSTABLE, WITH QUICK-CONNECT



- PSI: 3500
- Temperature Max: 200°F
- 3/8" M Plug Inlet
3/8" F Coupler Outlet
- 1/4" Hose Barb

PART NO.	MODEL NO.	GPM
8.710-502.0	Adjustable QC - 1.8 mm	2.0-3.0
8.710-503.0	Adjustable QC - 2.1 mm	3.0-5.0
8.710-504.0	Adjustable QC - 2.3 mm	5.0-8.0

ACID INJECTORS

8.904-221.0	Adjustable QC - 1.8 mm	2.0-3.0
8.904-222.0	Adjustable QC - 2.1 mm	3.0-5.0
8.904-223.0	Adjustable QC - 2.3 mm	5.0-8.0
8.701-187.0	Injector Repair Kit	
8.900-087.0	Injector Acid Kit	

CHEMICAL INJECTORS - BRASS

All metal parts are brass



- PSI: 4000
- Temperature Max: 190°F
- 3/8" MPT Inlet, Outlet
- Premier Type Injector
- EPDM O-Ring

PART NO.	MODEL NO.	GPM	PSI
8.710-505.0	Brass Injector 1.8	2.0-2.6	4000
8.710-506.0	Brass Injector 2.1	2.7-4.0	4000
8.710-507.0	Brass Injector 2.3	4.0-5.3	4000
8.704-028.0	Repair Kit		

DUAL INJECTORS - HIGH DRAW

Dual, adjustable downstream chemical injector



- PSI: 4000
- Temperature Max: 190°F
- 3/8" MPT Inlet, Outlet

PART NO.	MODEL NO.	GPM	PSI
9.117-527.0	Injector .083/2.1	3 - 5	4500

CHEMICAL INJECTORS / PRESSURE REDUCER - EXTRACT-A-FLOW

"Low side" chemical injector that regulates inlet pressure to maintain consistent chemical ratio.



- GPM: Up to 6.0
- 1/2" FPT I/O Ports
- 1/4" Hose Barb Chemical Inlet
- +2% Injection Ratio Variation

PART NO.	DESCRIPTION
8.711-162.0	Weep Seat*
8.711-160.0	Non-Weep
8.711-161.0	With Switch**
8.904-389.0	Hose Barb with Viton Check

*Weep Seat allows pump to self-prime

**With burner control switch (9.802-362.0) automatically turns burner off when water flow stops

CHEMICAL INJECTORS - NON ADJUSTABLE

PART NO.	MODEL NO.
8.756-796.0	1.8
8.756-797.0	2.1
8.757-724.0	2.3

FLOAT VALVES - ADJUSTABLE, BRONZE



- Temperature Max: 180°F
- Cast-Bronze Body
- Adjustable Float Arm
- Live Rubber Stopper

PART NO.	THREAD	STEM	GPM AT 40 PSI
8.710-045.0	1"	1/4"-20	47
9.802-183.0	1"	1/2"-20	47
8.707-305.0		3/8"	

REPAIR PARTS FOR ADJUSTABLE VALVES

8.700-476.0 Short Arm*

*Fits 3/8", 1/2" and 3/4" valve only
Note: Float valve requires stem and float

FLOAT VALVES - STEMS



PART NO.	LENGTH	THREAD
BRASS		
9.802-157.0	8"	1/4" - 20
8.710-051.0	10"	1/4" - 20
STAINLESS-STEEL		
8.710-047.0	8"	1/4" - 20 x 5/16" - 18

Parts for other float valves also available

FLOAT VALVES - BALLS, COPPER & PLASTIC



PART NO.	LENGTH	THREAD
COPPER		
8.710-061.0	4" x 5"	1/4"-20
8.710-052.0	5"	1/4"-20
8.710-053.0	6"	1/4"-20
PLASTIC		
8.710-057.0	6"	1/4"-20
8.710-059.0	8"	1/4"-20
9.802-061.0	4" x 5"	1/4"-20

Parts for other float valves also available

FLOAT VALVES - PA BRASS ASSEMBLY

Used on Pressure Pro Equipment as well as other major equipment manufacturers.



- Max GPM: 7.0
- Max PSI: 145
- Temperature: 140°F
- Brass Body
- Positional / Adjustable Arm

PART NO.	DESCRIPTION	INLET	TEMP
8.710-042.0	Float Valve	3/8" BSP-M	140°F
8.754-586.0	Float Valve	3/8" NPT-M	140°F
8.704-204.0	Repair Kit		

FLOAT VALVES - ST-8, BRASS ASSEMBLY

Complete assembly includes valve, stem and float.



- GPM: 5.0
- Temperature: 175°F
- 1/2" FPT Inlet
- Brass Housing with Polyamide Cover

PART NO.	DESCRIPTION	GPM	TEMP
8.710-031.0	ST-8	5.0	175°F
8.710-033.0*	MPT Adapter Kit for ST-8		

*Double MPT nipple, sealing washer and lock nut

FLOAT VALVES - BRASS FLOAT WITH BALL & STEM



- Inlet PSI Max: 142
- GPM: 7.1 at PSI: 28
- 1/2" MPT Inlet
- Temperature: 140°F
- Positive Soft Buna / Brass Shut-Off
- Adjustable Float Ball Settings
- Inlet Nut and Washer Seal Provided

PART NO.	DESCRIPTION	PSI MAX	TEMP
8.710-037.0	Valve Complete	142	140°F
8.704-092.0	Repair Kit		

FLOAT VALVES - DIAPHRAGM



- PSI: 142
- GPM: 7.86 at PSI: 28
- GPM: 6.68 at PSI: 14
- Temperature: 140°F
- 3/8" MPT Inlet
- Requires only 6.5" x 3" inside tank
- All-Plastic Snap-On Float
- Positive Shutoff Diaphragm Style
- Inlet Screen, Tank Gasket and Nut Included

PART NO.	DESCRIPTION	PSI	TEMP
8.710-030.0	Float Valve Complete	142	140°F

FLOAT VALVES - KERICK



FLOW RATE FOR 1/2" VALVE

- PSI: 20 at GPM: 7.7
- PSI: 30 at GPM: 9.1
- PSI: 40 at GPM: 10.5
- PSI: 50 at GPM: 11.4
- PSI: 60 at GPM: 12.5

FLOW RATE FOR 3/4" VALVE

- PSI: 30 at GPM: 13
- PSI: 60 at GPM: 16.5

PART NO.	DESCRIPTION	ORIFICE
8.749-328.0	1/2" Float Valve	.25"
8.749-329.0	3/4" Float Valve	.30"

FLOAT VALVES - VERTICAL



- GPM: 8.0 at PSI: 150
- Temperature: 140°F
- 1/2" MPT Inlet
- Inlet Nut and Washer Seal Provided

PART NO.	DESCRIPTION	TEMP
9.802-185.0	Vertical Float Tank Valve, 1/2" MPT Inlet	140°F

FLOAT VALVES - BRASS

- MTM / Veloci
- Includes Filter and Pipe

PART NO.	DESCRIPTION
8.754-085.0	Float Valve 3/4" M with Filter and Pipe

FLOAT VALVES - HUDSON



- PSI: 0-130
- Temperature: 90 & 150°F
- No External Moving Parts
- No Float Ball or Arm
- All Plastic, Nylon, Rubber and Stainless-Steel
- 1" Inlet - Easy Installation
- Automatic Anti-Siphon
- Flow Capacity 80% of Supply: GPM:40 at PSI: 40

PART NO.	DESCRIPTION	PSI	TEMP
8.710-035.0	1" Hudson Float Valve, 90°	0-130	90°F
8.710-036.0	1" Hudson Float Valve, 150°	0-130	150°F

CHECK VALVES - SWING ACTION, LOW PSI



Retain prime on pumps with low-lift capability.



- PSI: 150
- Brass Body, Swing (flapper) Action
- FPT Inlet, Outlet
- Gravity Seal, No Spring Pressure

PART NO.	DESCRIPTION	PSI
8.709-378.0	1/2", FPT Inlet / Outlet, Gravity Seal	150
8.709-379.0	3/4", FPT Inlet / Outlet, Gravity Seal	150
8.709-380.0	1", FPT Inlet / Outlet, Gravity Seal	150
8.709-381.0	1-1/4", FPT Inlet / Outlet, Gravity Seal	150

CHECK VALVES - STAINLESS-STEEL, HIGH PSI

Holds pump prime without overloading pump suction.



- PSI: 6000 - 6500
- Rated PSI: 5800
- Temperature: 195°F
- Female x Female
- Weight: 2.0 oz.

PART NO.	DESCRIPTION	FLOW RATE	PSI
8.709-361.0	1/4" F x F	6.1	6500
8.709-362.0	3/8" F x F	10.5	6500
8.709-364.0	1/2" F x F		6000

CHECK VALVES - 460 SERIES, HIGH PSI

Holds pump prime without overloading pump suction



8.709-356.0

8.709-357.0

8.709-358.0

- Max PSI: 2500-3000
- Buna Seals
- Stainless-Steel Check Ball & Spring
- Machined-Brass Body

PART NO.	DESCRIPTION	CRACKING PRESSURE
2500 PSI MINIATURE BALL CHECK		
8.709-356.0	1/4", M x F	1 PSI
8.709-357.0	1/4", M x M	3 PSI
3000 PSI STAINLESS GUIDED BALL AND QUAD RING SEAT		
8.709-358.0	1/4", F x F	1 PSI
8.709-359.0	3/8", F x F	3 PSI

CHECK VALVES - SPRING LOADED, HIGH PSI

Holds pump prime without overloading pump suction.



- PSI: 1200
- Max Temperature: 250°F
- Cracking Pressure PSI: 1
- Machined-Brass Body
- Stainless Steel Springs
- Poppet Seal

PART NO.	DESCRIPTION	MATERIAL
8.709-351.0	1/4", F x F	Machined Brass Body
8.709-352.0	3/8", F x F	Machined Brass Body
8.709-353.0	1/2", F x F	Machined Brass Body
8.709-354.0	3/4", M x M	Machined Brass Body

CHECK VALVES - SPRING LOADED, LOW PSI

Holds pump prime without overloading pump suction



- PSI: 150
- Max Temperature: 250°F
- Machine-Cast Brass Bodies
- FPT x FPT
- Mount Horizontal or Vertical

PART NO.	DESCRIPTION	PSI	TEMP
8.709-384.0	1/2"	150	250°F
8.709-385.0	3/4"	150	250°F
8.709-386.0	1"	150	250°F

CHECK VALVES / BACKFLOW PREVENTOR - T533 MODEL, VACUUM BREAKER

Protects water supply from harmful chemical backflow - will not allow "spike" pressure to push chemicals into supply line. Now required by many city and state regulations.



- Max PSI: 125
- Max Temperature: 180°F
- Machined-Brass Housing, Chrome Plated Finish
- Plastic Diaphragm Check
- 3/4" Female Garden Hose Inlet (with Lock Screw)
- 3/4" Male Garden Hose Outlet

PART NO.	DESCRIPTION	MATERIAL
8.705-039.0	Backflow Preventor	Machined Brass Housing

CHECK VALVES - PVC, LOW PSI

Holds pump prime without overloading pump suction.



- PSI: 125
- Cracking Pressure PSI: 1
- Temperature: 180°F
- Choice of Connects
- PVC Plastic Body
- Stainless-Steel Ball Check
- Designed for Harsh Chemical Applications

PART NO.	DESCRIPTION	PSI	TEMP
8.709-366.0	1/4" MPT x 1/4" Barb	125	180°F
8.709-367.0	1/4" Barb x 1/4" MPT	125	180°F
8.709-369.0	1/4" Barb x 1/4" Barb	125	180°F
8.709-370.0	3/8" Barb x 3/8" Barb	125	180°F
8.709-373.0	1/2" Barb x 1/2" Barb	125	180°F

*8.709-373.0 has Viton Seals

BALL VALVES - STAINLESS-STEEL, LOW PSI



- PSI: 2000 at Temperature: 180°F
- PSI: 1000 at Temperature: 300°F
- PSI: 300 at Temperature: 350°F
- Full-Flow Ports
- Investment Cast Process
- Two-Piece 316 Stainless Bodies
- Glass-Filled Teflon® Seals

PART NO.	DESCRIPTION
8.709-265.0	1/4" F x F, Glass-filled Teflon® Seals
8.709-266.0	3/8" F x F, Glass-filled Teflon® Seals
8.709-268.0	1/2" F x F, Glass-filled Teflon® Seals
8.709-269.0	3/4" F x F, Glass-filled Teflon® Seals

BALL VALVES - FORGED-BRASS, LOW PSI



- PSI: 600
- Temperature: 180°F
- Forged-Brass Body
- Full-Flow Ports
- Teflon® PTFE Seals

SIZE	M X F PART NO.	F X F PART NO.	M X M PART NO.
1/4"	8.709-249.0	8.709-250.0	-
3/8"	8.709-252.0	8.709-253.0	8.709-254.0
1/2"	8.709-255.0	8.709-256.0	8.709-257.0
3/4"	8.709-258.0	8.709-259.0	8.709-260.0
1"	8.709-261.0	8.709-262.0	8.709-263.0

BALL VALVES - MINI, LOW PSI



- PSI: 600
- 180° Handle Movement
- Forged-Brass Body

SIZE	M X F PART NO.	F X F PART NO.	M X M PART NO.
1/8"	8.709-208.0	8.709-209.0	-
1/4"	8.709-211.0	8.709-212.0	8.709-213.0
3/8"	8.709-216.0	-	-

BALL VALVES - NICKEL-PLATED BRASS, LOW PSI



- Threaded FPT Connects
- Chrome-Plated Ball
- Full-Flow Bore
- Seats and Seals have Glass-Filled Teflon®
- Nickel Plated Brass Body

PART NO.	DESCRIPTION	PSI
8.709-242.0	1/4", Chrome-plated Ball, Full-flow Bore	710
8.709-243.0	3/8", Chrome-plated Ball, Full-flow Bore	710
8.709-244.0	1/2", Chrome-plated Ball, Full-flow Bore	710
8.709-245.0	3/4", Chrome-plated Ball, Full-flow Bore	570
8.709-246.0	1", Chrome-plated Ball, Full-flow Bore	570
8.709-247.0	1-1/4", Chrome-plated Ball, Full-flow Bore	430
8.709-248.0	1-1/2", Chrome-plated Ball, Full-flow Bore	430
8.709-264.0	2", Chrome-plated Ball, Full-flow Bore	360

BALL VALVES - RKH SERIES - STAINLESS-STEEL, HIGH PSI



- 316 Stainless-Steel Body, Ball and Stem
- Viton O-Rings
- Delrin Ball Seats
- Full Port

PART NO.	FPT	PSI
8.709-277.0	3/8" x 3/8"	5880
8.709-280.0	1/2" x 1/2"	5880
8.709-283.0	3/4" x 3/4"	5154
8.709-286.0	1" x 1"	5154

BALL VALVES - SHUT-OFF, HIGH PSI



- Max PSI: 3000
- Max Temperature: 176°F
- Nickel Plated Brass Body

PART NO.	DESCRIPTION	PSI
8.753-959.0	3/8" FPT x 3/8" FPT	3000
9.113-462.0	3/8" FPT x FPT	5000
9.115-186.0 NEW	1/2" F X 1/2" F	5000

BALL VALVES - BKH SERIES, HIGH PSI



- Rugged Carbon Steel Construction
- 2-Way
- NPT (F x F) Threads
- Blow-Out Proof Stems
- Delrin Ball Seats
- Buna O-Rings

PART NO.	FPT	PSI
8.709-274.0	1/4" x 1/4"	7350
8.709-276.0	3/8" x 3/8"	7350
8.709-279.0	1/2" x 1/2"	7350
8.709-282.0	3/4" x 3/4"	5880
8.700-270.0	Replacement Handle (fits all sizes above)	
8.700-271.0	Replacement Screw for Handle	

BALL VALVES - PVC, LOW PSI

Great for chemical on / off flow control.



- PSI: 125
- Temperature: 140°F
- Flag Handle
- PVC and Nitrile Material
- Chemical and Impact Resistant

PART NO.	DESCRIPTION	PSI
8.709-214.0	1/4" Panel Mtg, Barb x Barb	125
8.709-219.0	1/4" In-line, Barb x Barb	125
8.709-220.0	3/8" In-line, Barb x Barb	125

BALL VALVES - STAINLESS-STEEL, LOW PSI, ONE PIECE



- PSI: 800 at Temperature: 300°F
- PSI: 400 at Temperature: 350°F
- Standard Port
- 316 Stainless-Steel Body
- Suitable for Steam

PART NO.	FPT	MATERIAL
8.709-287.0	1/4" x 1/4"	316 Stainless-steel Body
8.709-288.0	3/8" x 3/8"	316 Stainless-steel Body
8.709-290.0	3/4" x 3/4"	316 Stainless-steel Body



BALL VALVES - 2940/3830 MINI SERIES, LOW PSI



- PSI: 147 Working Pressure
- Nickel Plated Brass
- Brass Housing-Hex Bar
- Compact Knob Operation
- Designed to fit tight quarters
- Telfon® Seals

PART NO.	DESCRIPTION
8.709-270.0	Series 3830 - Nickel Plated Brass, 1/8" x 1/8" FPT
8.709-271.0	Series 3830 - Nickel Plated Brass, 1/4" x 1/4" FPT
8.709-272.0	Series 2940 - Brass, 3/8" x 3/8" FPT
8.709-273.0	Series 2940 - Brass, 1/2" x 1/2" FPT

BALL VALVES - T-601 SERIES COMPACT PVC, LOW PSI



- PSI: 150 Working Pressure
- Temperature: 140°F
- FPT Thread Both Ends
- Easy-Turn Handle
- EPDM Seals - White Body

PART NO.	FPT
8.709-233.0	1/4" x 1/4"
8.709-234.0	1/2" x 1/2"
8.709-235.0	3/4" x 3/4"
8.709-236.0	1" x 1"
8.709-237.0	1-1/4" x 1-1/4"
8.709-238.0	1-1/2" x 1-1/2"
8.709-239.0	2" x 2"

BALL VALVES - MODEL 727, 3 WAY



- PSI Max: 500
- Temperature Max: 180°F
- Telfon® Seat & Stainless Handle Screw
- Buna Seals
- Brass

PART NO.	DESCRIPTION	PSI	TEMP
8.709-207.0	1/4" M x F x F	500	180°F

BALL VALVES - 454 SERIES, POLYPROPYLENE, LOW PSI

Full port reinforced polypropylene body for strength & chemical resistance.



8.709-222.0 8.709-228.0

- Max PSI: 240 Working Pressure
- Teflon Seats for smooth operation & proper sealing.
- Double EPDM O-Rings in Stem for "No Leak"
- Threaded Mounting Brass Inserts on 1-1/4" - 2" Sizes
- 8mm Mounting Inserts

CHEMICAL METERING VALVES - FLOW SELECTOR, 3 & 4 WAY

3-way and 4-way lever control with brass body.



- 3-Way
- Plumb for 2 Inlets and 1 Outlet or 1 Inlet and 2 Outlets
- 4-Way
- Plumb for 3 Inlets and 1 Outlet or 1 Inlet and 3 Outlets
- Rated Temperature: 180°F

PART NO.	DESCRIPTION	TEMP
8.710-108.0	1/4" FPT 3-Way	180°F
8.710-110.0	3/8" FPT 3-Way	180°F
8.710-113.0	1/4" FPT 4-Way	180°F

PART NO.	FPT
TWO-WAY BALL VALVES	
8.709-222.0	1/2" x 1/2"
8.709-223.0	3/4" x 3/4"
8.709-224.0	1" x 1"
8.709-225.0	1-1/2" x 1-1/2"
8.709-226.0	2" x 2"
THREE-WAY BALL VALVES	
8.709-227.0	1/2" x 1/2" x 1/2"
8.709-228.0	3/4" x 3/4" x 3/4"
8.709-229.0	1" x 1" x 1"
8.709-230.0	1-1/4" x 1-1/4" x 1-1/4"
8.709-231.0	1-1/2" x 1-1/2" x 1-1/2"
8.709-232.0	2" x 2" x 2"

CHEMICAL METERING VALVES - SERIES 28, FLOW CONTROL



- PSI: 150
- Rated Temperature: 175°F
- Forged-Brass, Nickel-Plated Body
- Panel Mtg in 17/32" Hole
- Compact Size
- Double-Stem Seal

PART NO.	DESCRIPTION	TEMP	PSI
8.710-775.0	1/4", FPT Inlet/Outlet	175°F	150
8.710-776.0	3/8", FPT Inlet/Outlet	175°F	150

CHEMICAL METERING VALVES - BRASS



- PSI: 400 - 450
- Rated Temperature: 100°F
- 1/4" Inlet, Outlet
- Easy-Grip, Fluted Plastic Handle with Pointer
- Brass Body, Viton gland seal eliminates air leaks
- Panel Mount 11/16" or 3/4" Hole
- Extremely Compact T-Style

PART NO.	DESCRIPTION	PSI
8.710-773.0	"T" 1/4" F x F, Forged	440
9.802-188.0	"L" 1/4" M x M	440

CHEMICAL METERING VALVES - SERIES 28, FLOW CONTROL



9.802-187.0

- PSI: 4000
- GPM: 6
- 1/4" Inlet, Outlet
- Adjusts from off to full flow



9.802-532.0

- 9.802-187.0 has presettable limiting orifice
- Forged-Brass Body

PART NO.	DESCRIPTION	PSI
8.710-771.0	Flow Control	4000
9.802-187.0	Flow Control with Bottom Locking Adjustment	4000
9.802-532.0	Valve, Less Solenoid	4000

CHEMICAL METERING VALVES - FLOW CONTROL



The valve that "seals" (will not suck air).



- PSI: 3500
- Rated Temperature: 195°F
- 28" Vacuum - No Leak
- Viton Gland Seal Isolates Metering Threads from Solution
- Stainless-Steel Needle, Brass Seat
- 1/4" FPT Ports
- Heavy-Duty Brass Bar Stock Body
- Panel Mounts 5/8" Hole
- Large Easy-Grip Four-Lobe Handwheel
- Aluminum or Poly Available

PART NO.	DESCRIPTION	PSI
8.904-362.0	Metering Valve, Aluminum Knob	3500
8.904-361.0	Metering Valve, Poly Knob	3500

CHEMICAL METERING VALVES - DUAL - ST-66 MODEL



Chemical flow can be metered and shut off remotely from the injector. With two inlets, it also allows switching from one solution to another.



- Double-Metering Dial with Center OFF
- Panel Mount in Single 5/8" Hole
- Two Input Barbs - for Different Chemicals to Single Outlet Barb

PART NO.	DESCRIPTION	PANEL MOUNTING
8.710-779.0	ST-66	Single 5/8" Hole

THERMAL RELIEF VALVE/PUMP PROTECTOR- COMPACT



- With and W/out 90° Hose Barb

PART NO.	SIZE	90° BARB	"TRIP" TEMP
8.712-544.0	1/4" MPT	No	145°F
8.712-545.0	3/8" MPT	No	145°F
9.802-181.0	3/8" MPT	Yes	145°F
9.804-025.0	1/4" MPT	Yes	145°F
8.707-250.0	3/8" MPT	Yes	190°F
9.803-670.0	1/2" MPT	Yes	190°F
8.707-256.0	1/2" MPT	Yes	145°F

REGULATOR VALVE - STEAM

For "combo" hot pressure washer / steamer units. The single-turn on / off diverter valve bypasses pump flow to reduce water flow to the coil, creating steam in place of normal hot water.



- PSI: 4000
- Rated Temperature: 175°F
Max Temperature: 300°F
- 1/4" MPT Inlet, Outlet
- Panel Mount in 11/16" or 3/4" Hole
- Machined-Brass Body
- Easy-Grip Plastic Knob

PART NO.	ORIFICE (MM)	PSI
8.711-263.0	0.8	4000
8.904-406.0	1.2	4000
8.904-407.0	1.5	4000
8.904-408.0	1.8	4000
8.904-409.0	2.0	4000

THERMAL RELIEF VALVE/ PUMP PROTECTOR

A must for any pump that might ever be left in bypass mode (unloading) for more than 15 seconds. Protects the pump from overheating caused by recirculating water.




- Installs in Bypass Line
- Automotive Style Wax Element
- Automatically Resets at Cool Down to 115°F+
- No Adjustment Required
- 1/8" FPT Side Discharge
- PSI: 125 Inlet Pressure
- GPM: 2.5

PART NO.	INLET	GPM	"TRIP" TEMP
8.904-565.0	3/8" MPT	2.5	140°F
8.904-566.0	1/2" MPT	2.5	140°F
8.723-943.0	1/2" MPT	2.5	165°F

RUPTURE DISKS



- Temperature: 225°F
- 3/8" Inlet x 1/2" MPT Outlet
- Prevents dangerous thermal expansion of water in the coil
- Ensures operator safety

PART NO.	DESCRIPTION	MAX PSI
9.802-192.0	 Assembly	7000
8.707-381.0	Assembly	8500

THERMAL RELIEF VALVE/PUMP PROTECTOR - TRV



- PSI: 145
- Opens Temperature: 135°F
- Low Profile
- Brass Body
- Plastic-Covered Barb


PART NO.	DESCRIPTION	PSI
8.712-547.0	3/8" Inlet, Low Profile, Brass Body	145
8.712-548.0	1/2" Inlet, Low Profile, Brass Body	145

PRESSURE RELIEF VALVES

Commonly referred to as a Pop-Off Valve.



- Temperature: 160°F
- GPM: 10
- MPT Inlets x End Vent Outlets
- Machined Brass
- Automatically Resets
- Prevents pressure overloads, protecting people and equipment

PART NO.	DESCRIPTION	MAX PSI
8.722-192.0	1/4", Silver Spring	1200
8.722-193.0	1/4", Red Spring	2400
8.722-194.0	1/4", Orange Spring	3600
8.722-190.0	 3/8", Orange Spring	3600
9.802-191.0	3/8", Blue Spring	5000

AIR VALVE - COIL BLOW OUT

Also good for water tank blowouts as well as blowing out irrigation lines.



- Threaded Connection
- 1/8" Model is Stainless-Steel
- 1/4" Brass Valve
- Valve Cap Included

PART NO.	DESCRIPTION
8.705-047.0	Stainless-steel, 1/8" MPT Connect
8.705-048.0	Lead Free Brass, 1/4" MPT Connect

FLOW METERS - VISI - FLOAT



- Installs in Bypass Line
- Automotive Style Wax Element
- Automatically Resets at Cool Down to 115°F+
- No Adjustment Required
- 1/8" FPT Side Discharge
- PSI: 125 Inlet Pressure
- GPM: 2.5
- 2" Scale

PART NO.	GPH	MATERIAL	METERING VALVE
8.710-097.0	.6-5	Brass	No
8.710-101.0	2-10	Brass	No
8.710-102.0	2-10	Brass	Yes
8.710-099.0	.6-5	Stainless-steel	No
8.710-100.0	.6-5	Stainless-steel	Yes
8.710-104.0	2-10	Stainless-steel	No
8.710-105.0	2-10	Stainless-steel	Yes

Note: All flow measurements must be on low-pressure side of pump

PRESSURE RELIEF VALVE - EASY-START, HIGH PSI



- Rated PSI: 4050
Permissible PSI: 4500
- Temperature: 176°F
- GPM: 8.0
- 3/8" MPT Inlet
- Hose Barb Outlet (8 mm)
- Machined-Brass Body
- Stainless-Steel Spring and Ball

PART NO.	DESCRIPTION	GPM	PSI
8.709-867.0	Easy-Start Valve	8.0	4500

PRESSURE GAUGES - PORT KIT



- PSI: 5000 Cold Water
- 1-3/4" Gauge
- 3/8" QC Socket
- 3/8" QC Plug

PART NO.	DESCRIPTION	QC SOCKET / PLUG
8.712-208.0	Pressure Gauge Kit	3/8" / 3/8"

PRESSURE RELIEF VALVE - EASY-START, LOW PSI



- Temperature: 195°F
- GPM: 8.0
- Machined-Brass Housing
- Stainless-Steel Internals

PART NO.	DESCRIPTION	INLET / OUTLET	PSI
9.804-065.0	Easy-Start Valve	1/4" MPT, 1/8" FPT	5000
9.802-190.0	Easy-Start Valve	3/8" MPT, 1/8" FPT	5000
8.709-865.0	Easy-Start Valve	3/8" MPT, 1/4" Barb	4100
8.709-866.0	Easy-Start Valve	3/8" MPT, 1/8" FPT	3500
9.802-137.0	Hose Barb (only) - 1/4" Barb x 1/8" MPT		

PRESSURE GAUGES - 100 SERIES PNEUMATIC



- Black Lacquered Steel Case
- Bronze Bourdon Tube
- Dry Gauge
- 1/4" NPT Brass Mounting Stem
- Accuracy + 3-2-3%

PART NO.	PRESSURE RANGE	MOUNTING STEM
2" BOTTOM MOUNT		
8.710-307.0	0-60	1/4" NPT Brass
8.710-308.0	0-100	1/4" NPT Brass
8.710-309.0	0-200	1/4" NPT Brass
8.710-310.0	0-300	1/4" NPT Brass

PRESSURE GAUGE - FUEL / OIL



- PSI: 0-200
- Perfect for Testing Burner Pump Fuel Pressure
- Metal Housing
- 2" Bottom Mount, 1/4" NPSM

PART NO.	DESCRIPTION	PRESSURE RANGE
8.700-738.0	Fuel Oil Pressure Gauge	0-200 PSI

NOTE: NPSM - American National Straight Pipe Threads




PRESSURE GAUGES - ABS, CORROSION-RESISTANT



- 2-1/2", Bottom Mount
- Acid and Alkali Proof Plastic Case
- 1/4" NPT Brass Mounting Stem
- Accuracy, Dry: + 3-2-3%
- Accuracy, Filled: + 1.5%
- Bronze Bourdon Tube

PART NO.	PRESSURE RANGE	MOUNTING STEM
8.710-293.0	0-200 PSI	1/4" NPT Brass
8.710-294.0	0-300 PSI	1/4" NPT Brass
8.710-295.0	0-1000 PSI	1/4" NPT Brass
8.710-296.0	0-2000 PSI	1/4" NPT Brass
8.710-297.0	0-3000 PSI	1/4" NPT Brass
8.710-299.0	0-5000 PSI	1/4" NPT Brass

PRESSURE REGULATOR, WATER 2-WAY



- PSI: 10 - 125
- 3/8" Valve
- Lowers city water pressure for better machine performance

PART NO.	DESCRIPTION	PSI
8.707-248.0	Pressure Regulator	10-125

PRESSURE GAUGES - VACUUM - STAINLESS-STEEL



- Black Lacquered Steel Case
- Bronze Bourdon Tube
- Dry Gauge
- 1/4" NPT Brass Mounting Stem
- Accuracy + 3-2-3%

PART NO.	DESCRIPTION
2-1/2" BACK MOUNT WITH BRONZE INTERNALS	
8.710-246.0	30Hg - 0 Vacuum Gauge
MOUNTING HARDWARE FOR BACK MOUNT GAUGES	
8.710-223.0	U-Bracket, Mounting
8.710-228.0	3-Hole Flange, Mounting

PRESSURE GAUGES - STAINLESS-STEEL



- AISI 304 Stainless-Steel Case
- Bronze Bourdon Tube
- 99.5% Pure Glycerin Filled
- PSI and Bar Dual Scale
- 1/4" NPT Brass Mounting Stem
- Convex Magnifying Lens for Easy Readings
- Steel Needle and Peg
- Accuracy + 1.5%

PART NO.	PRESSURE RANGE	MOUNTING STEM
2-1/2" BOTTOM MOUNT WITH BRONZE INTERNALS		
8.710-270.0	0-100 PSI	1/4" NPT Brass
8.710-272.0	0-200 PSI	1/4" NPT Brass
8.710-273.0	0-300 PSI	1/4" NPT Brass
8.710-276.0	0-500 PSI	1/4" NPT Brass
8.710-278.0	0-1000 PSI	1/4" NPT Brass
8.710-280.0	0-2000 PSI	1/4" NPT Brass
8.710-281.0	0-3000 PSI	1/4" NPT Brass
8.710-283.0	0-4000 PSI	1/4" NPT Brass
9.804-017.0	0-5000 PSI	1/4" NPT Brass
8.710-286.0	0-6000 PSI	1/4" NPT Brass
9.804-001.0	0-10,000 PSI	1/4" NPT Brass
2-1/2" BACK MOUNT WITH BRONZE INTERNALS		
8.710-250.0	0-100 PSI	1/4" NPT Brass
8.710-254.0	0-500 PSI	1/4" NPT Brass
8.710-256.0	0-1000 PSI	1/4" NPT Brass
8.710-257.0	0-2000 PSI	1/4" NPT Brass
8.710-258.0	0-3000 PSI	1/4" NPT Brass
8.710-259.0	0-4000 PSI	1/4" NPT Brass
8.712-149.0	0-5000 PSI	1/4" NPT Brass
8.712-150.0	0-6000 PSI	1/4" NPT Brass (Includes bracket)
8.710-262.0	0-6000 PSI	1/4" NPT Brass
9.804-013.0	0-10,000 PSI	1/4" NPT Brass
MOUNTING HARDWARE FOR BACK MOUNT GAUGES		
8.710-223.0	U-Bracket, Mounting	1/4" NPT Brass
8.710-228.0	3-Hole Flange, Mounting	1/4" NPT Brass

PRESSURE GAUGES / TEMPERATURE TEST SET



Convenient test set provides both pressure and temperature check with one easy quick coupled connection at outlet of unloader or coil.



- Test Set 5000
500°F Thermometer
5000 PSI Pressure Gauge for
Systems up to 2000 PSI
- Test Set 10,000
500°F Thermometer
10,000 PSI Pressure Gauge for
Systems up to 5000 PSI

PART NO.	DESCRIPTION
8.904-559.0	Test Set 5000 (0-2500 PSI Systems)
8.904-558.0	Test Set 10,000 (0-5000 PSI Systems)

THROTTLE CONTROL - SPEEDMASTER



Stop overworking the engine and pump during bypass. Decelerator reduces engine speed when pump head pressure drops below 215 PSI, reduces flow during bypass, slows recirculation heat build-up.



- PSI: 3500
- Temperature: 300°F
- A Major System Saver for Gas Engine Units
- Machined-Brass Body
- Stainless-Steel Gland Components
- 1/4" Male Connect
- Viton Seals
- 42" Lined and Covered Control Cable
- Engine Speeds Infinitely Adjustable for "Fine Tuned" System Performance

PART NO.	DESCRIPTION
8.903-840.0	Throttle Control

VOLTMETERS



- Designated for OEM or Replacement
- Accuracy to + 5%
- Metal Case
- Rugged and Weather-Resistant
- Bright Stainless Bezel
- Utilize as Constant Monitor or as Test Instruments
- Fits 2-1/16" Mounting Hole

PART NO.	DESCRIPTION
8.712-159.0	Voltmeter 120V

TACH/HR METER



PART NO.	DESCRIPTION
8.904-540.0	12VDC,SENDEC W/Magnet Tool

TEMPERATURE GAUGE

Dial thermometers.



- 3" Diameter Dial - Stainless-Steel Case
- Shatter-Resistant Polycarbonate Lens
- Stainless-Steel Stem (2.5")
- 1/2" MPT Connector
- Accuracy to within 3% of Dial Range (50-500=+ 6.8°F)

PART NO.	DESCRIPTION
8.712-488.0*	Temp Gauge +50° to 500°F

*"Thermwell" to be used with dial thermometers in systems over 300 PSI. For best results, fill Thermwell with liquid silicon or glycol to increase sensitivity and accuracy of readings.

TEMPERATURE GAUGE - THERMWELL

For use with above temperature gauge.



- PSI: 2000 Collapse Protection
- 1.75" Immersion Length
- Stainless-Steel, 3/4" MPT x 1/2" FPT

PART NO.	DESCRIPTION
8.712-489.0	Thermwell for 8.712-488.0

- Elapsed Time
- No Battery Required
- Digital Quartz Accuracy (+ .02%)
- Extremely Rugged and Tamperproof
- Sealed from Dirt and Moisture
- Requires 2" Panel Cutout

PART NO.	DESCRIPTION
8.749-183.0	EL 5-80V AC/DC 50/60 Hz
9.802-283.0	24-240V AC - Rectangle
8.904-540.0	Tach/Hour 12V DC with Magnet Tool