

Top of posts to be cut to slope for surface run-off and weather treated



125x43mm horizontal sw rail, twice nailed to post with 75mm long ms galvanised nails

100x100mm s.w. posts at 1.2m centres with weathered tops

Site mixed ST2 grade concrete or GEN1 grade ready mix concrete in accordance with NHBC standards Appendix 2.1 B Table 1

50mm hardcore

SECTION

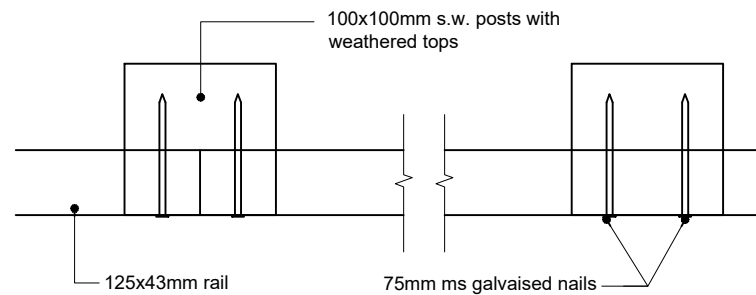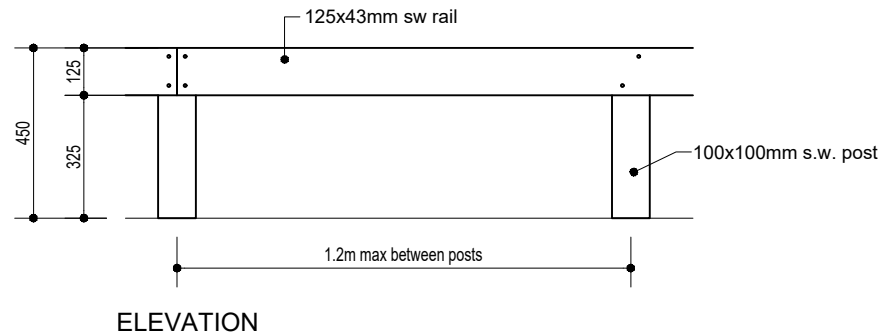

REV.	DESCRIPTION	DATE
CLIENT		
Obsidian Developments		
DRAWING TITLE		
External Details		
450mm Timber Knee Rail		
SCALE	DATE	DRAWN BY
1:20@A4	April '25	HA Ltd
DRAWING NO.	REVISION	TYPE
2445-D06		PLN



10 Gold Tops  
Newport t. 01633 844970  
NP20 4PH e. info@hammond-ltd.co.uk

[www.hammond-ltd.co.uk](http://www.hammond-ltd.co.uk)

© Hammond Architectural Limited 2025  
Figured dimensions must be taken in preference to scaled dimensions and any discrepancies are to be referred to Hammond Architectural Ltd. Contractors, subcontractors and suppliers must verify all dimensions on site before commencing any work or making any workshop drawings.