

Fairwater Housing Project Residential Development

Energy Hierarchy/Strategy - Report



Energy Hierarchy/Strategy - Report

Report Type / Status:	For Information
Report Issue:	P02
Project Number:	7159
File Number:	7159-MCP-ZZ-XX-RP-N-2010
Originator:	Nicholas Yeubrey
Title:	Electrical Engineer
Originator:	Huw Parsons
Title:	Mechanical Engineer
Checked by:	Graham Carr
Approved by:	Chris Morgan
Date:	April 2023

Prepared For:

Prepared By: McCann & Partners



CONTENTS

ENERGY HIERARCHY/STRATEGY

1.01	Apartment/House SAP Assessment	1.
1.02	Photovoltaic System	1.
1.03	Lighting Strategy	1.
1.04	LTHW Heating and Domestic Hot Water	1.
1.05	Mechanical Ventilation with Heat Recovery (MVHR)	1.
1.06	Initial Stage Draft SAP Iterations	2.

Consulting Engineers

SCHEDULE OF AMENDMENTS

Date	Revision	Page No./Clause No./Schedule	Detail of Revision
28/10/24	P02	1.01	U values table corrected




ENERGY HIERARCHY / STRATEGY

1.01 Houses/Bungalow SAP Assessment

Each House Type and the Bungalow Unit will be provided with a dedicated EPC, modelled using the Standard Assessment Procedure (SAP).

All dwellings are to achieve an EPC A rating.

The Energy Strategy for the Apartment Block will be on the principles of the Energy Hierarchy.

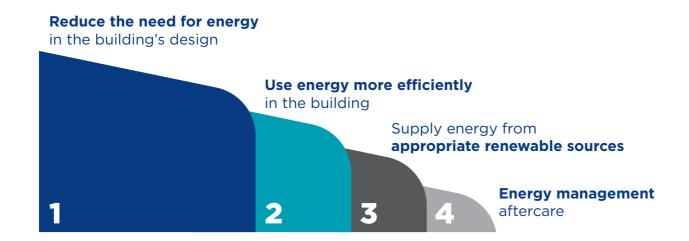

The following building fabric performance figures are currently proposed to assist in achieving Building Regulation compliance:

Element	U V alue
Ground Floor	0.11 w/m²/k
External Walls	0.13 w/m²/k
Pitched Roofs	0.13 w/m²/k
Flat Roofs	0.13 w/m²/k
Windows	0.8 w/m²/k
Doors	1.00 w/m²/k
Air Permeability	3.00 m ³ /Hr/m ²

The energy performance of the Houses and Bungalow Unit will be assessed under the Standard Assessment Procedure (SAP) to demonstrate compliance with Building Regulations AD L1A.

SAP calculations will be produced utilising approved software, Elmhurst 'Design SAP 10'. As part of the SAP assessment a draft Energy Performance Certificate will be generated which displays both the energy efficiency rating and the environmental impact of the dwelling.

For each House Type and Bungalow Unit it is proposed to include Air Source Heat Pump technology to provide Heating and Hot Water demands, along with roof mounted Photovoltaic solar panels to generate electricity and help reduce CO₂ emissions.

1.02 Photovoltaic System

In order to achieve the required reductions of CO₂ emissions for Building Regulations Compliance, solar photovoltaic panels have been proposed on the roof of each House and the Bungalow Unit.

The PV panels currently proposed are 450W monocrystalline type SunPower panels.

Each system will also include an electricity export meter, so that during periods of low energy consumption, the system will be capable of exporting electricity to the electricity grid.

1.03 Lighting Strategy

Within each house type and bungalow lamp holder pendants shall be fitted utilising low energy LED lighting throughout the property.

1.04 LTHW Heating and Domestic Hot Water

Each House Type and the Bungalow Unit will be provided with an individual Air Source Heat Pump Unit This will consist of an Externally mounted condenser unit located at the rear of the property. From this condenser, primary pipework enters the property connecting to an internal module, which in turn serves a heating installation of wall mounted radiators and a Hot Water Cylinder to provide domestic hot water to all outlets.

1.05 Mechanical Ventilation with Heat Recovery (MVHR)

All properties will have a Mechanical Ventilation Heat Recovery (MVHR) unit installed. The MVHR unit will provide a system of whole house energy efficient low power mechanical heat recovery ventilation, utilising the heat from the air extracted from the Kitchens and Bathrooms to pre heat fresh supply air to Living areas and Bedrooms.

7159/Admin/Reports/M&E/7159-MCP-ZZ-XX-RP-N-2010



Consulting Engineers

1.06 Initial Stage Draft SAP Iterations


The following table shows the results of Draft SAP calculations carried out to illustrate the suitability of using differing Mechanical and Electrical Building Services technologies within each House Type. The results of the table have allowed the Design Team and Client to decide to progress with the selected solution – Individual ASHP for radiator heating and domestic hot water services.

Fairwater – 2B4P Semi Detached House

	Iteration 1 – Panel Heating	Iteration 2 – Individual GSHP	Iteration 3 – Individual ASHP	Iteration 4 – Storage Heating	Iteration 5 – Panel Heating	Iteration 6 – Storage Heating
Building Fabric	U-Value					
External Wall			0.13 W/	m²K		
Roof			0.13 W/	m²K		
Windows			0.8 W/r	m ² K		
Doors			1.00 W/	m²K		
Air Permeability			3 m²/h	im²		
Window G-Value			0.5			
Window Frame Factor			0.7			
Thermal Bridging (Y-Value)			0.15 (De	fault)		
M&E Specification						_
Primary Heating	Direct Electric	Ground Source Heat Pump per	Air Source Heat Pump per	Storage Heater	Direct Electric	Storage Heater
Filliary Heating	(Efficiency - 100%)	apartment	apartment	(Efficiency - 100%)	(Efficiency - 100%)	(Efficiency - 100%)
Heating Controls	Programmer and room	Programmer, TRV's and bypass	Programmer, TRV's and	Controls for high retention	Programmer and room	Controls for high retention
Treating Controls	thermostat	rrogrammer, rity 3 and bypass	bypass	storage heaters	thermostat	storage heaters
Heating Emitters	Electric Panel Heaters	Radiators	Radiators	High heat retention storage heater	Electric Panel Heaters	High heat retention storage heater
Secondary Heating	None provided	None provided	None provided	None provided	None provided	None provided
Hot Water	Electric Immersion	From primary heating system – 210l Cylinder	From primary heating system – 210l Cylinder	Electric Immersion	Electric Immersion	Electric Immersion
Ventilation	Balanced mechanical ventilation with heat recovery: Nuaire MRXBOX-ECO2					
Lighting	100% low energy lighting					
Electricity Tariff	Standard Tariff	Standard Tariff	Standard Tariff	Economy 7	Standard Tariff	Economy 7
Renewables (PV)	2kW (South West Facing)	2kW (South West Facing)	2kW (South West Facing)	2kW (South West Facing)	4kW (South West Facing)	4kW (South West Facing)

Predicted EPC Results				
Iteration	Energy Efficiency Rating	Environmental Impact (CO2) Rating		
1 - Panel Heating	B 87	B 89		
2 - Individual GSHP	A 96	A 97		
3 - Individual ASHP	A 96	A 96		
4 - Storage Heating	A 97	B 89		
5 - Panel Heating	A 97	A 97		
6 - Storage Heating	A 107	A97		

Energy Efficient Very energy efficient			
(92 plus) A	-101101 70111	ing coars	
	_		
(81-91) B			
(69-80)	C		
(55-68)	D		
(39-54)		E	
(21-38)		F	
(1-20)			G
Not energy efficient -	- higher runn	ing costs	



Total Emissions					
Iteration	Dwelling Emission Rate (DER) kg/m ²	Target Emission Rate (TER) kg/m²	Pass Margin %		
1 - Panel Heating	16.82	24.79	32.15		
2 - Individual GSHP	6.44	24.79	74.02		
3 - Individual ASHP	7.40	24.79	70.15		
4 - Storage Heating	17.04	24.79	31.26		
5 - Panel Heating	7.13	24.79	71.24		
6 - Storage Heating	7.35	24.79	70.35		

7159/Admin/Reports/M&E/7159-MCP-ZZ-XX-RP-N-2010



Cardiff Office: Faraday House Terra Nova way Penarth marina Cardiff CF64 1SA

T: 029 2035 2450 E: cardiff@mccannp.com Swansea Office:
Office 2.02
Bay Technology Centre
Baglan Energy Park
Port Talbot
SA12 7AX

Bristol Office: 48 Corn Street Bristol BS1 1HQ

T: 01792 794285 Tel: 0117 4622480

mccannp.com