



Wound Depth Cartridges

Configurations:

- Available in a range of micron ratings from 0.5 to 250 μ , lengths from 9.75" to 80", and diameters from 2" to 7" OD
- Many media types are available including: natural cotton, bleached cotton, FDA bleached cotton, polyester, FDA polyester, nylon, glass, rayon, and ryton
- Core materials available in polypropylene, 304 & 316 stainless steel, tin and glass
- End cap configurations available to fit nearly every type of filter housing



Features:

- Operating temperatures up to 750 °F with glass media
- Wide pH range of 2-9 with polypropylene media
- Recommended changeout dP up to 35 PSID
- Allowable flow ranges from 0-6 GPM/10" length (2.5" OD)




Address: 9819 Wallisville Rd, Houston, TX 77013

Phone: 832-804-8147

Email: sales@fpj-mfg.com



Wound Depth Cartridges - Part Numbers

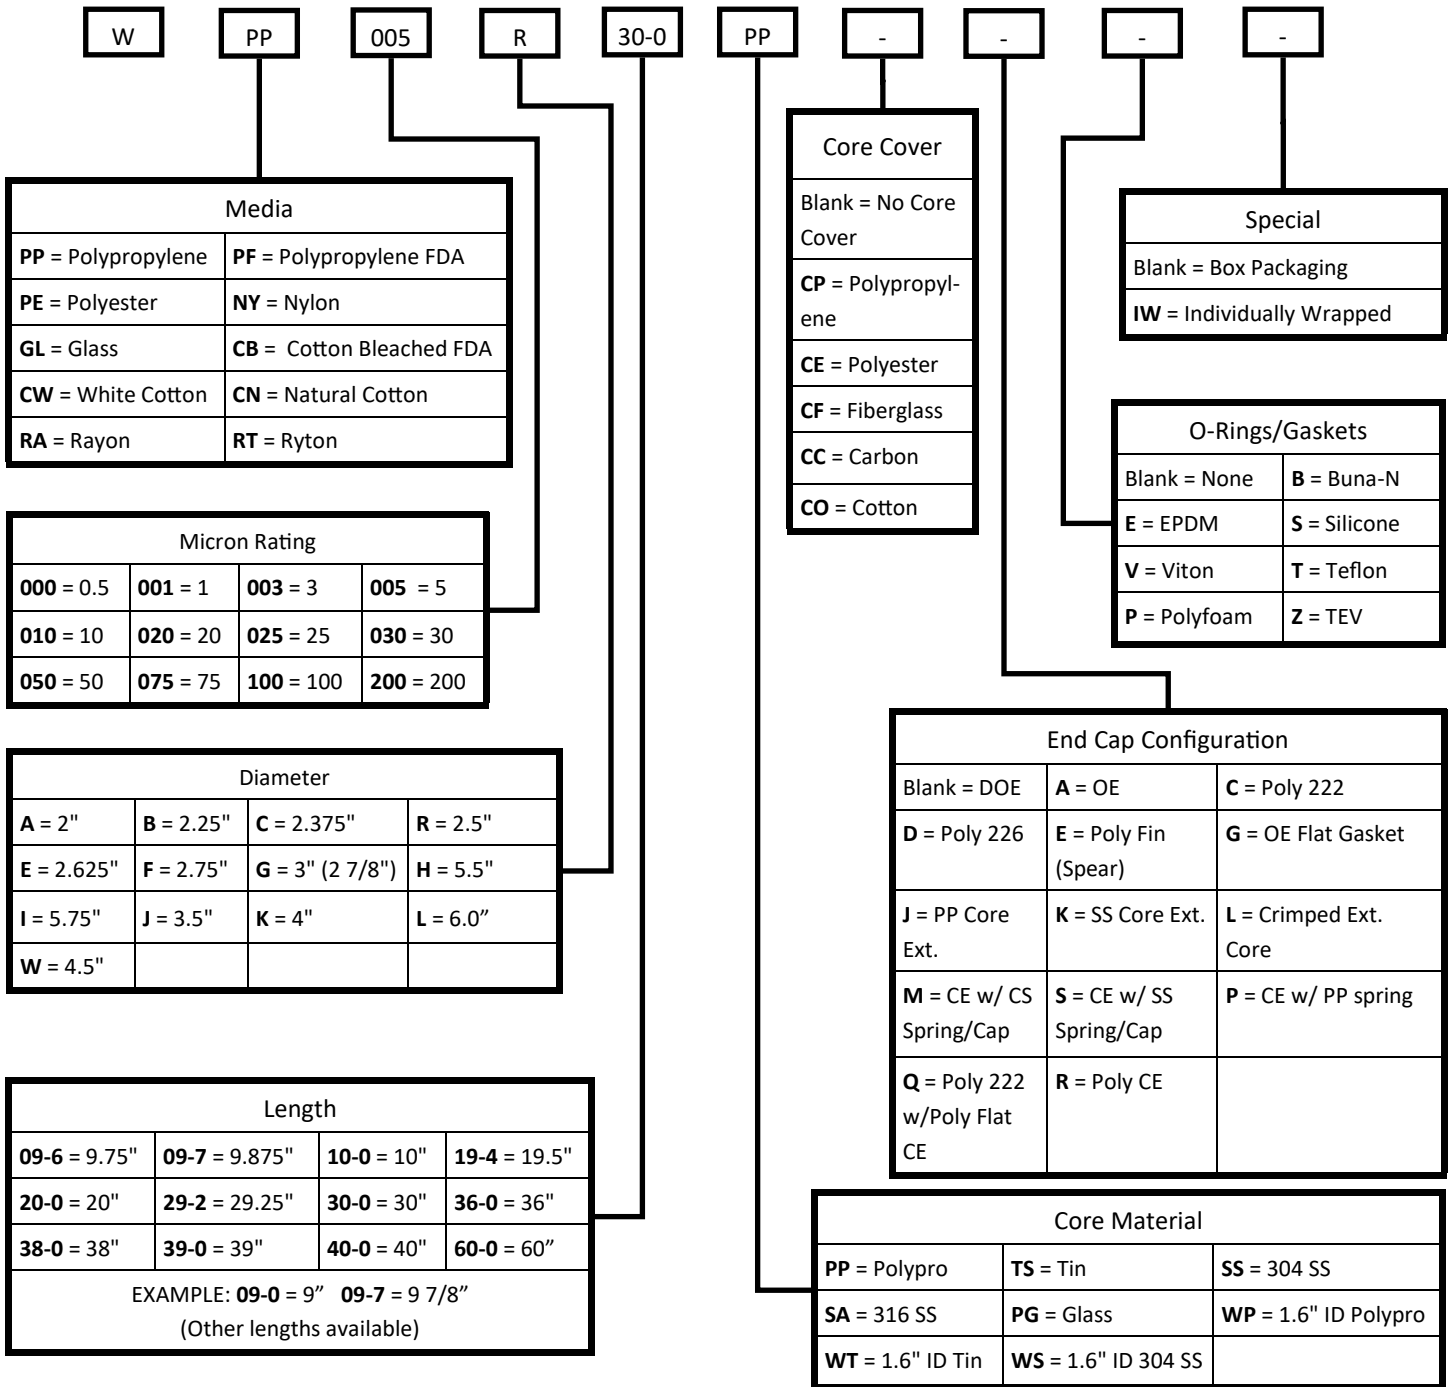

Address: 9819 Wallisville Rd, Houston, TX 77013

Phone: 832-804-8147

Email: sales@fpj-mfg.com