


B16.5 ANSI Series B Class 150 Blind

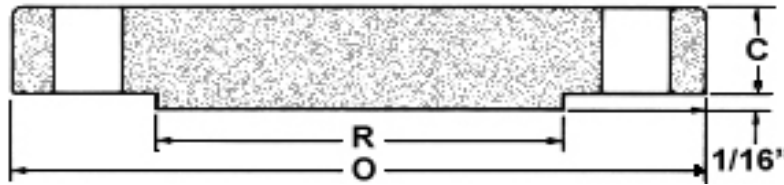

Blind

Nom Size	Thickness			Drilling				Blind Weight
	OD	Blind	OD of RF	Bolt Circle	Bolt Length	Hole Dia	# of Holes	
	O	C	R					
26	30.94	1.69	28.00	29.31	5.50	0.88	36	373
28	32.94	1.82	30.00	31.31	5.57	0.88	40	454
30	34.94	1.69	32.00	33.31	6.00	0.88	44	545
32	37.06	1.75	34.00	35.44	6.25	0.88	48	648
34	39.56	1.88	36.25	37.69	6.75	1.00	40	783
36	41.62	2.00	38.25	39.75	6.75	1.00	44	890
38	44.25	2.07	40.25	42.12	7.50	1.12	40	1089
40	46.25	2.13	42.50	44.12	7.75	1.12	44	1247
42	48.25	2.25	44.50	46.12	8.00	1.12	48	1393
44	50.25	2.32	46.50	48.12	8.50	1.12	52	1579
46	52.81	2.38	48.62	50.56	8.75	1.25	40	1824
48	54.81	2.50	50.75	52.56	9.00	1.25	44	2045
50	56.81	2.63	52.75	54.56	9.25	1.25	48	2248
52	58.81	2.69	54.75	56.56	9.50	1.25	52	2547
54	61.00	2.75	56.75	58.75	9.75	1.25	56	2848
56	63.00	2.82	58.75	60.75	9.75	1.25	60	3144
58	65.94	2.88	60.75	63.44	10.00	1.38	48	3560
60	67.94	2.94	63.00	65.44	10.25	1.38	52	3913

Dimensions are in inches. Weights are in pounds.

Minimum Industry Specifications