


B16.5 ANSI Series B Class 300 Blind

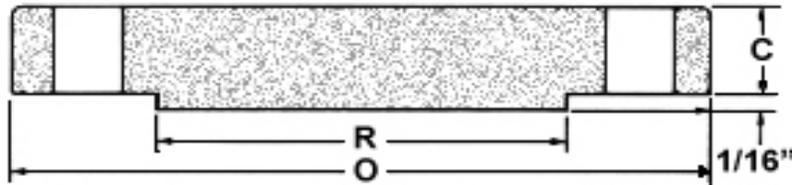

Blind

Nom Size	Thickness			Drilling				Blind Weight
	OD	Blind	OD of RF	Bolt Circle	Bolt Length	Hole Dia	# of Holes	
	O	C	R					
26	34.12	3.44	29.00	31.62	10.50	1.38	32	907
28	36.25	3.44	31.00	33.75	10.50	1.38	36	1023
30	39.00	3.63	33.25	36.25	11.25	1.50	36	1249
32	41.50	4.00	35.50	38.50	12.00	1.62	32	1556
34	43.62	4.00	37.50	40.62	12.00	1.62	36	1719
36	46.12	4.00	39.75	42.88	12.50	1.75	32	1921
38	48.12	4.31	41.75	44.88	13.00	1.75	36	2257
40	50.12	4.50	43.88	46.88	13.50	1.75	40	2549
42	52.50	4.63	46.00	49.00	14.00	1.88	36	2876
44	54.50	4.94	48.00	51.00	14.50	1.88	40	3304
46	57.50	5.00	50.00	53.75	15.00	2.00	36	3766
48	59.50	5.00	52.25	55.75	15.25	2.00	40	4183
50	61.50	5.38	54.25	57.75	15.75	2.00	44	4629
52	63.50	5.56	56.25	59.75	16.00	2.00	48	5096
54	65.88	5.32	58.25	62.12	16.00	2.00	48	5678
56	69.50	6.00	60.50	65.00	17.75	2.38	36	6642
58	71.94	6.00	62.75	67.44	18.00	2.38	40	7347
60	73.94	5.88	65.00	69.44	18.00	2.38	40	7980

*Dimensions are in inches. Weights are in pounds.
Minimum Industry Specifications*