


B16.5 ANSI Series B Class 600 Blind

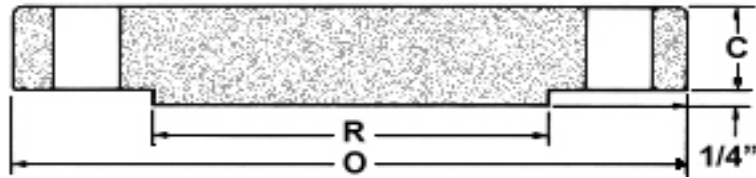

Blind

Nom Size	Thickness			Drilling				Blind Weight
	OD	Blind	OD of RF	Bolt Circle	Bolt Length	Hole Dia	# of Holes	
	O	C	R					
26	35.00	4.38	28.62	31.75	13.50	1.75	28	1194
28	37.50	4.56	30.88	34.00	14.25	1.88	28	1427
30	40.25	5.00	33.12	36.50	15.25	2.00	28	1802
32	42.75	5.31	35.25	38.75	16.00	2.12	28	2159
34	45.75	5.68	37.50	41.50	17.25	2.38	24	2645
36	47.75	5.94	39.75	43.50	17.75	2.38	28	3013
38	50.00	6.12	41.50	45.75	18.25	2.38	28	3404
40	52.00	6.38	43.75	47.75	18.75	2.38	32	3838
42	55.25	6.75	46.00	50.50	19.75	2.62	28	4585
44	57.25	7.00	48.25	52.50	20.25	2.62	32	5105
46	59.50	7.31	50.25	54.75	20.75	2.62	32	5758
48	62.75	7.69	52.50	57.50	22.25	2.88	32	6737
50	65.75	8.00	54.50	60.00	23.25	3.12	28	7695
52	67.75	8.25	56.50	62.00	23.75	3.12	32	8426
54	70.00	8.56	58.75	64.25	24.25	3.12	32	9333
56	73.00	8.88	60.75	66.75	25.50	3.38	32	10,529
58	75.00	9.12	63.00	68.75	26.00	3.38	32	11,414
60	78.50	9.56	65.25	71.75	27.25	3.62	28	13,108

Dimensions are in inches. Weights are in pounds.

Minimum Industry Specifications

1-877-461-6224 | 13204-146 Street NW Edmonton, AB T5L 4W8