


## B16.5 ANSI Series B Class 900 Blind

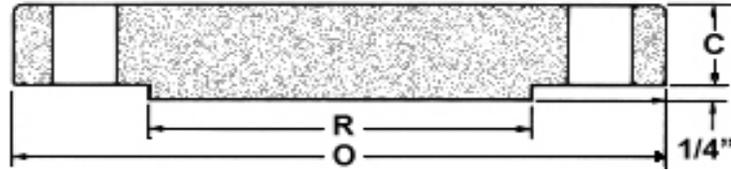

**Blind**

Nom Size	Thickness			Drilling				Blind Weight
	OD	Blind	OD of RF	Bolt Circle	Bolt Length	Hole Dia	# of Holes	
	O	C	R					
26	40.25	6.06	30.00	35.50	17.75	2.62	20	2184
28	43.50	6.56	32.25	38.25	19.50	2.88	20	2762
30	46.50	6.93	34.50	40.75	20.50	3.12	20	3334
32	48.75	7.31	36.50	43.00	21.00	3.12	20	3865
34	51.75	7.68	39.00	45.50	22.50	3.38	20	4576
36	53.00	7.94	40.50	47.25	22.25	3.12	24	4963
38	57.50	8.50	43.25	50.75	24.50	3.62	20	6253
40	59.50	8.81	45.75	52.75	25.00	3.62	24	6940
42	61.50	9.12	47.75	54.75	25.75	3.62	24	7675
44	64.88	9.56	50.00	57.62	27.00	3.88	24	8954
46	68.25	10.06	52.50	60.50	28.50	4.12	24	10,426
48	70.25	10.38	54.50	62.50	29.00	4.12	24	11,398

*Dimensions are in inches. Weights are in pounds.  
Minimum Industry Specifications*