


## B16.5 ANSI Series A Class 150 Blind

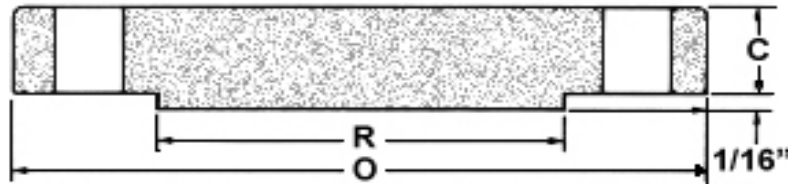

**Blind**

Nom Size	Thickness			Drilling				Blind Weight
	OD	Blind	OD of RF	Bolt Circle	Bolt Length	Hole Dia	# of Holes	
	O	C	R					
26	34.25	2.63	29.50	31.75	8.75	1.38	24	702
28	36.50	2.75	31.50	34.00	9.00	1.38	28	833
30	38.75	2.88	33.75	36.00	9.25	1.38	28	982
32	41.75	3.13	36.00	38.50	10.50	1.62	28	1237
34	43.75	3.19	38.00	40.50	10.50	1.62	32	1384
36	46.00	3.50	40.25	42.75	11.00	1.62	32	1676
38	48.75	3.38	42.25	45.25	11.00	1.62	32	1819
40	50.75	3.50	44.25	47.25	11.00	1.62	36	2040
42	53.00	3.75	47.00	49.50	11.50	1.62	36	2381
44	55.25	3.94	49.00	51.75	12.00	1.62	40	2717
46	57.25	4.00	51.00	53.75	12.00	1.62	40	2961
48	59.50	4.19	53.50	56.00	12.50	1.62	44	3348
50	61.75	4.32	55.50	58.25	13.25	1.88	44	3716
52	64.00	4.50	57.50	60.50	13.75	1.88	44	4156
54	66.25	4.69	59.50	62.75	14.00	1.88	44	4639
56	68.75	4.82	62.00	65.00	14.25	1.88	48	5132
58	71.00	5.00	64.00	67.25	14.75	1.88	48	5675
60	73.00	5.13	66.00	69.25	15.00	1.88	52	6154

*Dimensions are in inches. Weights are in pounds.*

*Minimum Industry Specifications*