


## B16.5 ANSI Series A Class 300 Blind

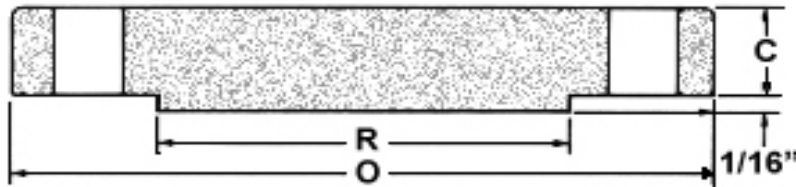

**Blind**

Nom Size	Thickness			Drilling				Blind Weight
	OD	Blind	OD of RF	Bolt Circle	Bolt Length	Hole Dia	# of Holes	
	O	C	R					
26	38.25	3.07	29.50	34.50	10.75	1.75	28	1078
28	40.75	3.50	31.50	37.00	11.25	1.75	28	1315
30	43.00	3.69	33.75	39.25	12.00	1.88	28	1543
32	45.25	3.88	36.00	41.50	12.50	2.00	28	1795
34	47.50	4.07	38.00	43.50	13.00	2.00	28	2068
36	50.00	4.32	40.25	46.50	13.50	2.12	32	2436
38	46.00	4.19	40.50	43.00	12.50	1.62	32	2001
40	48.75	4.44	42.75	45.50	13.25	1.75	32	2380
42	50.75	4.63	44.75	47.50	13.75	1.75	32	2688
44	53.25	4.82	47.00	49.75	14.25	1.88	32	3079
46	55.75	5.00	49.00	52.00	15.00	2.00	28	3499
48	57.75	5.19	51.25	54.00	15.25	2.00	32	3896
50	60.25	5.44	53.50	56.25	16.00	2.12	32	4442
52	62.25	5.63	55.50	58.25	16.50	2.12	32	4906
54	65.25	5.94	57.75	61.00	17.00	2.38	28	5684
56	67.25	6.00	59.75	63.00	17.50	2.38	28	6098
58	69.25	6.19	62.00	65.00	18.00	2.38	32	6669
60	71.25	6.38	64.00	67.00	18.50	2.38	32	7274

*Dimensions are in inches. Weights are in pounds.  
Minimum Industry Specifications*