


B16.5 ANSI Series A Class 600 Blind

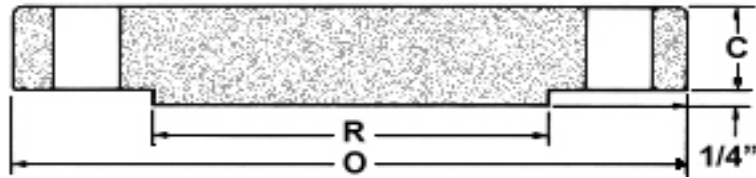

Blind

Nom Size	Thickness			Drilling				Blind Weight
	OD	Blind	OD of RF	Bolt Circle	Bolt Length	Hole Dia	# of Holes	
	O	C	R					
26	40.00	4.94	29.50	36.00	14.50	2.00	28	1759
28	42.25	5.19	31.50	38.00	15.00	2.12	28	2061
30	44.50	5.50	33.75	40.25	15.50	2.12	28	2423
32	47.00	5.81	36.00	42.50	16.50	2.38	28	2856
34	49.00	6.06	38.00	44.50	16.75	2.38	28	3237
36	51.75	6.38	40.25	47.00	17.75	2.62	28	3802
38	50.00	6.12	41.50	45.75	18.25	2.38	28	3404
40	52.00	6.38	43.75	47.75	18.75	2.38	32	3838
42	55.25	6.75	46.00	50.50	19.75	2.62	28	4585
44	57.25	7.00	48.25	52.50	20.25	2.62	32	5105
46	59.50	7.31	50.25	54.75	20.75	2.62	32	5758
48	62.75	7.69	52.50	57.50	22.25	2.88	32	6737
50	65.75	8.00	54.50	60.00	23.25	3.12	28	7695
52	67.75	8.25	56.50	62.00	23.75	3.12	32	8426
54	70.00	8.56	58.75	64.25	24.25	3.12	32	9333
56	73.00	8.88	60.75	66.75	25.50	3.38	32	10529
58	75.00	9.12	63.00	68.75	26.00	3.38	32	11414
60	78.50	9.56	65.25	71.75	27.25	3.62	28	13108

*Dimensions are in inches. Weights are in pounds.
Minimum Industry Specifications*