

SPC SERIES

www.qbtglobal.com



SPC FLOORING		
Thickness	3.5mm/4.0mm/4.5mm/5.0mm/5.5mm/6.0mm/6.5mm/7.0mm/8.0mm	
Wearlayer	0.2mm/0.3mm/0.5mm/0.55mm/0.7mm	
Regular size	Inch	mm
	7.17" 48"	182×1220mm
	7.20" 48"	183×1220mm
	7.24" 48"	184×1220mm
	9.06" 60"	230×1525mm
Customizable		
Locking system	Unilin, Valinge	
Edge Type	Right angle, micro chamfer, Bevel Paint Coating	
Underlayment	IXPE/EVA(1mm,1.5mm,2mm)	



SPC HERRINGBONE FLOORING		
Thickness	3.5mm/4.0mm/4.5mm/5.0mm/5.5mm/6.0mm/6.5mm/7.0mm/8.0mm	
Wearlayer	0.2mm/0.3mm/0.5mm/0.55mm/0.7mm	
Size	Inch	mm
	4.92" 24.02"	125×610mm
	5" 24.02"	127×610mm
	5" 30"	127×762mm
Locking system	Unilin, Valinge	
Edge Type	Right angle, micro chamfer, Bevel Paint Coating	
Underlayment	IXPE/EVA(1mm,1.5mm,2mm)	

LVT SERIES

www.qbtglobal.com



DRY BACK LVT FLOORING		
Thickness	1.5mm/2.0mm/2.5mm/3.0mm/4.0mm/5.0mm	
Wearlayer	0.07mm/0.1mm/0.15mm/0.2mm/0.3mm/0.5mm/0.55mm/0.7mm	
Size	Inch	mm
	6" 36"	152.4×914.4mm
	6" 48"	152.4×1219.2mm
	7" 48"	177.8×1219.2mm
	9" 48"	228.6×1219.2mm
Herringbone size	4.72" 24.02"	120×610mm
	3" 12"	76.2×304.8mm
Fishbone size	4.5 "22.5"	114.3×571.5mm



SELF-ADHESIVE LVT FLOORING		
Thickness	1.5mm/1.8mm/2.0mm/2.5mm/3.0mm	
Wearlayer	0.07mm/0.1mm/0.15mm/0.2mm/0.3mm/0.5mm/0.55mm/0.7mm	
Size	Inch	mm
	6" 36"	152.4×914.4mm
	6" 48"	152.4×1219.2mm
	7" 48"	177.8×1219.2mm
	9" 48"	228.6×1219.2mm



LOOSE LAY LVT FLOORING		
Thickness	4.0mm/4.5mm/5.0mm	
Wearlayer	0.2mm/0.3mm/0.5mm/0.7mm	
Size	Inch	mm
	6" 36"	152.4×914.4mm
	6" 48"	152.4×1219.2mm
	7" 48"	177.8×1219.2mm
	9" 48"	228.6×1219.2mm
	18" 18"	457.2×457.2mm



CLICK LOCK LVT FLOORING		
Thickness	4.0mm/4.5mm/5.0mm/5.5mm	
Wearlayer	0.2mm/0.3mm/0.5mm/0.55mm/0.7mm	
Size	Inch	mm
	6" 36"	152.4×914.4mm
	6" 48"	152.4×1219.2mm
	7" 48"	177.8×1219.2mm
	9" 48"	228.6×1219.2mm
	7.09" 48.03"	180×1220mm
Herringbone size	4.72" 24.02"	120×610mm
Locking system	Unilin,Valinge	
Edge Type	Right angle, micro chamfer, Bevel Paint Coating	
Underlayment	IXPE/EVA(1mm,1.5mm,2mm)	

QBT Product Advantages

- 100% virgin materials
- Good bending performance
- Anti-shrinkage and anti-warping properties
- Resistance to stains and wear




Warping of floor




Surface wear

Conventional splicing method

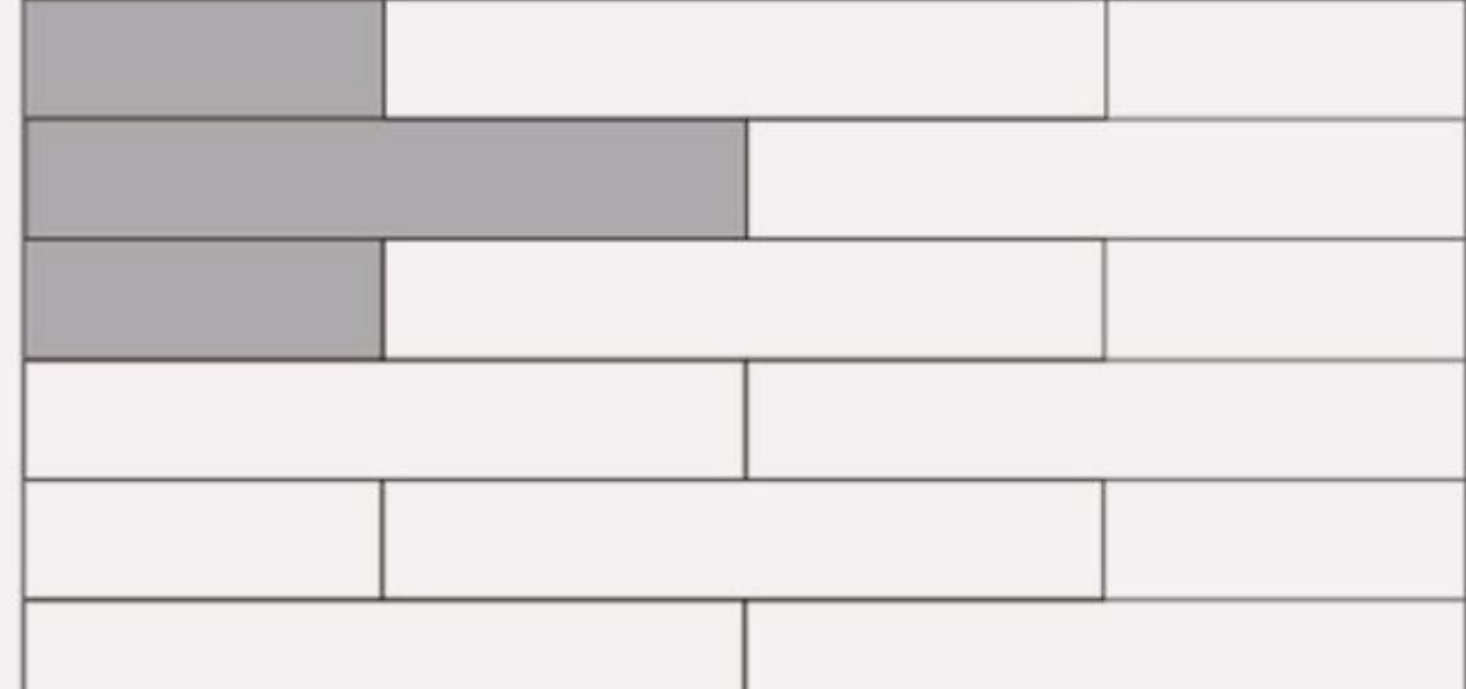

Straight lay

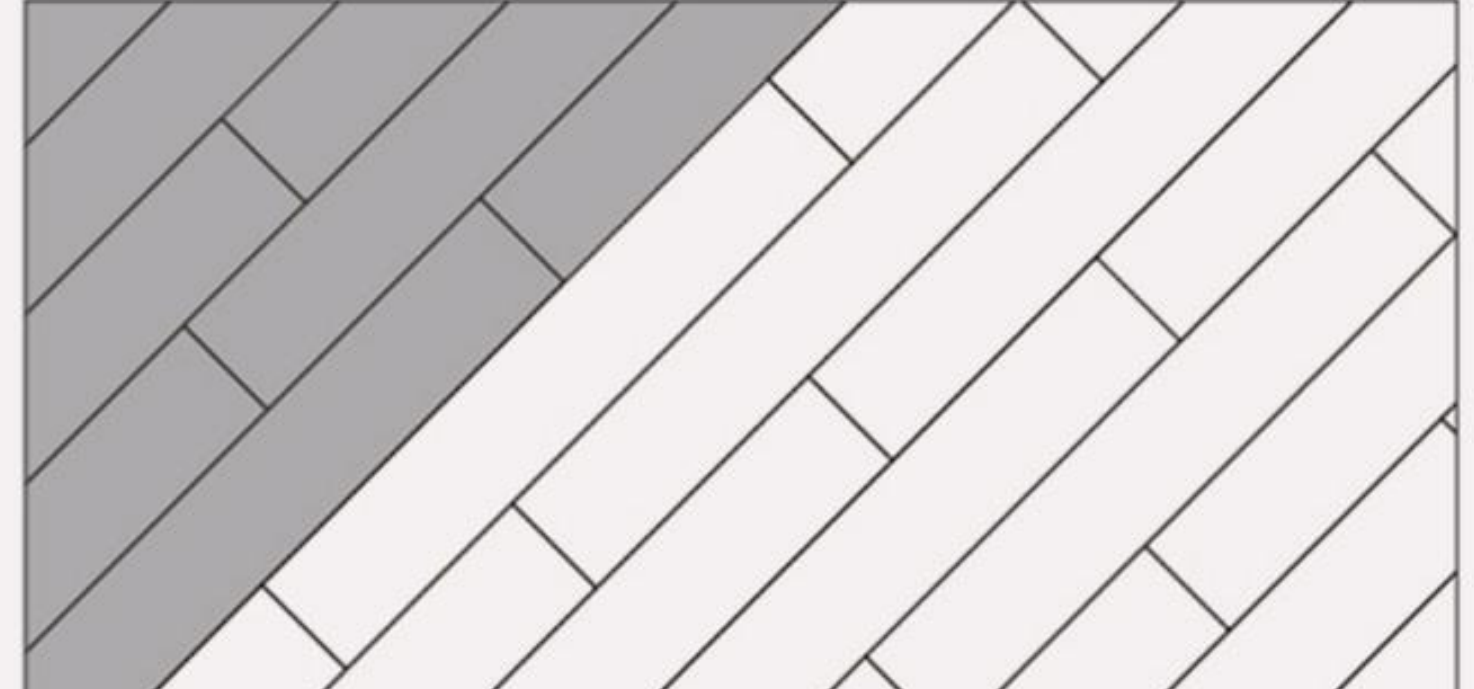


Batten diagonal alignment

(15° 30° 45° may be applied)



Herringbone

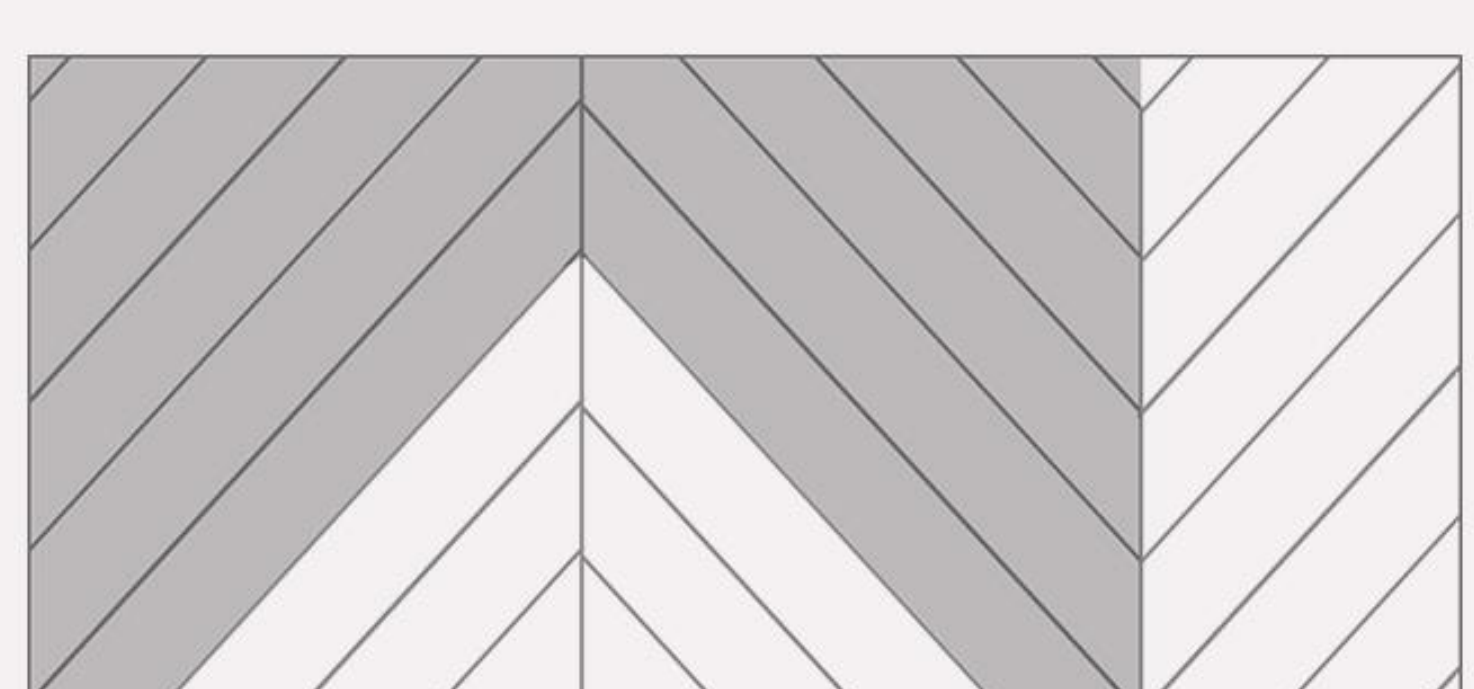

Fishbone