

TORQUE WRENCH PUMP/ POWER-PACK



Compact & Light Weight | Max Pr. 700bar | 2-stage Pump

Specification/ Technical Data

Max Pressure	700 bar
Tank Volume	5 lts
Motor Specification	1.1kW-1Ph-230v
Dimensions LBH	250x500x500mm
Lifting Handle	Included
Operation Pendant	Included
Output Ports	1/4" NPT
Control Panel	Included
Media	Mineral Oil
Oil Temperature Range	+20 to 60°C
Oil Viscosity	ISO VG 68
Oil Cleanliness (ISO 4406)	19/17 /14
Weight w/o Oil	36 Kg

*Consult factory for air operated version

Ordering Information

Basic Code	Torque Wrench Pump	FTW
Version	External Motor	EXT
No. of Stages	2	2
Motor Rating	1.1kW, 230V, 1Ph, 50Hz	-
Control	Pendant with 3m wire	-
Ports	1/4" NPT	-
Version		2x




FTW EXT is a electrically operated hydraulic torque wrench power-unit/ pump designed for working in harsh industrial environments. These are compatible with a variety of torque tools and can be operated up to 700 bar pressure. Rugged yet light weight in construction, the unit comes standard with an air-oil cooler to meet higher duty cycle requirements. Ergonomically designed lifting handles are provided to easily move the system from one place to another.

The power-unit has an external motor coupled to a 2-stage radial piston pump for easy maintenance and repair at end user site. The equipment design is suited for long lasting trouble free performance and faster torquing operations.

Key Features:

- Compact dimensions for ease of handling
- Maximum operating pressure of 700bar
- Standard voltage & current meters on control panel
- 2 stage radial piston pump for "rapid torquing"
- Built-in level and temperature interlocks
- Low weight design
- Air oil cooler as standard
- Ergonomic control pendant with 5m cable for remote operation as standard
- Gauge display in bar/psi
- Consult factory for high pressure Quick Connect Couplers (QDC/QRC)

Dimensional Details

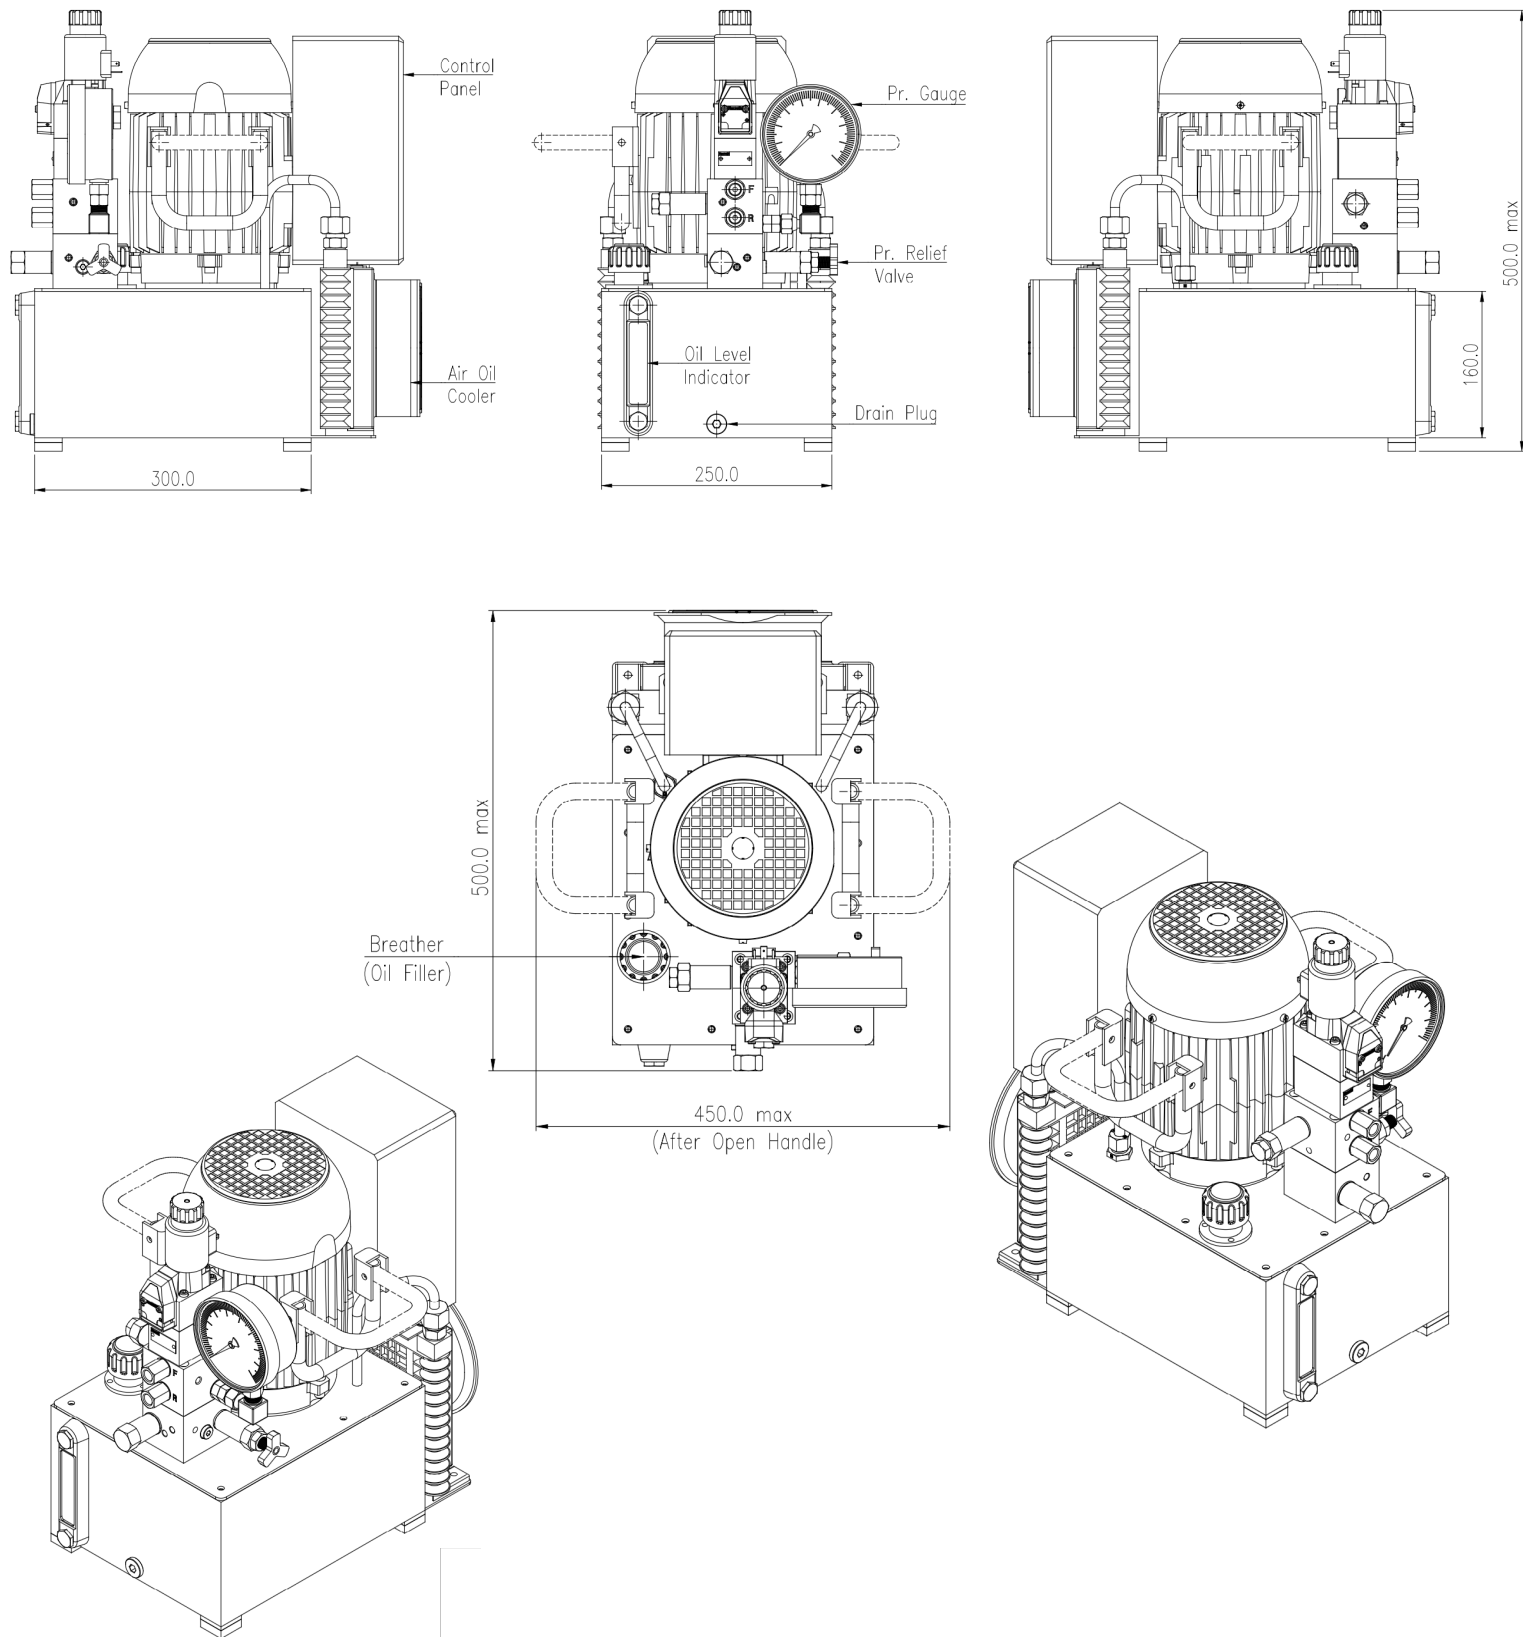

All dimensions in mm

BEMCO FLUIDTECHNIK LLP, Khanapur Road, Udyambag, Belgaum - 590 008 KA IN +91 831 4263001 info@fluidik.co

This document including the data, specifications and other product information are the exclusive property of BEMCO FLUIDTECHNIK LLP. It may not be reproduced or shared to third parties without written consent. The data specified above only serve to describe the product and no statements concerning a certain condition or suitability for a certain application can be derived from this information. The information given does not release the user from the obligation of own judgment and verification of suitability of the product for the application requirements.

