

TORQUE WRENCH PUMP/ POWER-PACK



Compact & Light Weight | Max Pr. 700bar | 2-stage Pump

Specification/ Technical Data

Max Pressure	700 bar
Tank Volume	5 lts
Motor Specification	1.1kW-1Ph-230v
Dimensions LBH	300x470x460mm
Protection Frame	Included
Operation Pendant	Included
Output Ports	1/4" NPT
Control Panel	Included
Media	Mineral Oil
Oil Temperature Range	+20 to 60°C
Oil Viscosity	ISO VG 68
Oil Cleanliness (ISO 4406)	19/17 /14
Weight w/o Oil	36 Kg



FTW EXT is a electrically operated hydraulic torque wrench power-unit/ pump designed for working in harsh industrial environments. These are compatible with a variety of torque tools and can be operated up to 700bar pressure. Rugged yet light weight in construction, the power-unit is protected by an enclosure with an air-oil cooler as standard to meet higher duty cycle requirements.

The power-unit has an external motor coupled to a 2-stage radial piston pump for easy maintenance and repair at end user site. The equipment design is suited for long lasting trouble free performance and faster torquing operations.


Ordering Information

Basic Code	Torque Wrench Pump	FTW
Version	External Motor	EXT
No. of Stages	2	2
Motor Rating	1.1kW, 230V, 1Ph, 50Hz	-
Control	Pendant with 3m wire	-
Ports	1/4" NPT	-
Version		2x

Key Features:

- Compact dimensions for ease of handling
- Safety enclosure/ frame as standard
- Maximum operating pressure of 700bar
- 2 stage radial piston pump for "rapid torquing"
- Built-in level and temperature interlock
- Low weight design
- Ergonomic control pendant with 3m cable for remote operation
- Detachable pendant to prevent unauthorised usage
- Gauge display in bar/psi

Dimensional Details

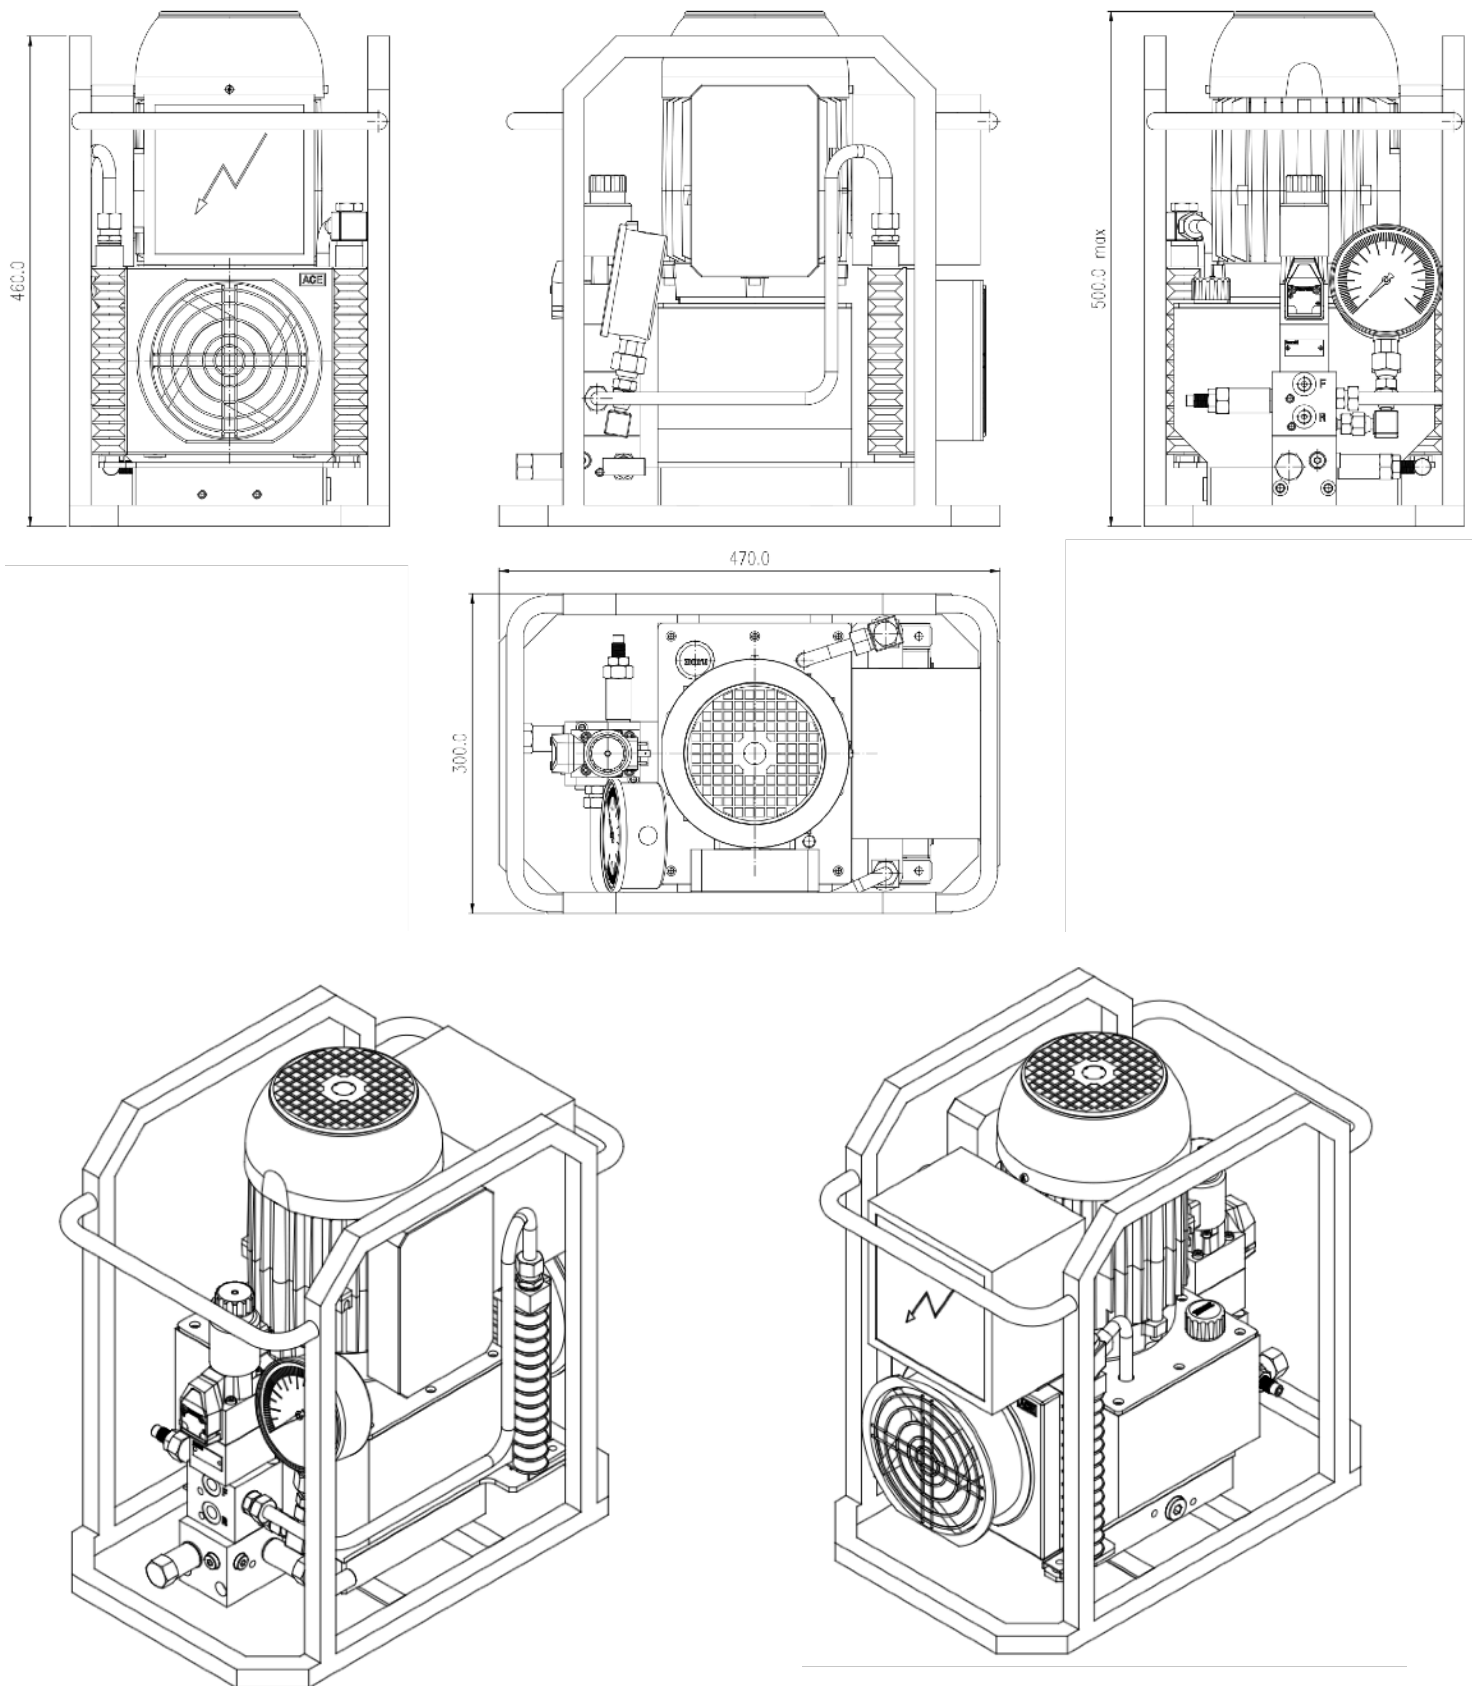

All dimensions in mm

BEMCO FLUIDTECHNIK LLP, Khanapur Road, Udyambag, Belgaum - 590 008 KA IN +91 831 4263001 info@fluidik.co

This document including the data, specifications and other product information are the exclusive property of BEMCO FLUIDTECHNIK LLP. It may not be reproduced or shared to third parties without written consent. The data specified above only serve to describe the product and no statements concerning a certain condition or suitability for a certain application can be derived from this information. The information given does not release the user from the obligation of own judgment and verification of suitability of the product for the application requirements.

