

X!PRESS - COMPACT PRESS



Upto 10T | Manual Operation| Down Stroking


Specification/ Technical Data

Max. Tonnage	5T/ 10T
Max Stroke	300 mm
Max Daylight	650 mm
Table Size	220 x 475 mm
Mounting Stand	Included
Operation	Hand Lever*
Cylinder Max Speed	30 mm/sec
Oil Filling Volume	4 lts
Media	Mineral Oil
Oil Temperature Range	+20 to 60°C
Oil Viscosity	ISO VG 46-100
Oil Cleanliness (ISO 4406)	19/17 /14
Weight (approx.)	260 Kg

* Solenoid option available upon request

Ordering Information

Basic Code	Compact Press	XPS
Capacity	5 or 10T	10T
Stroke/ Daylight	300/650 mm	300/650
Supply	230V, 1Ph, 50Hz	1
Operation	Manual	M
Control Panel	With Control Panel	CP
Version		2x

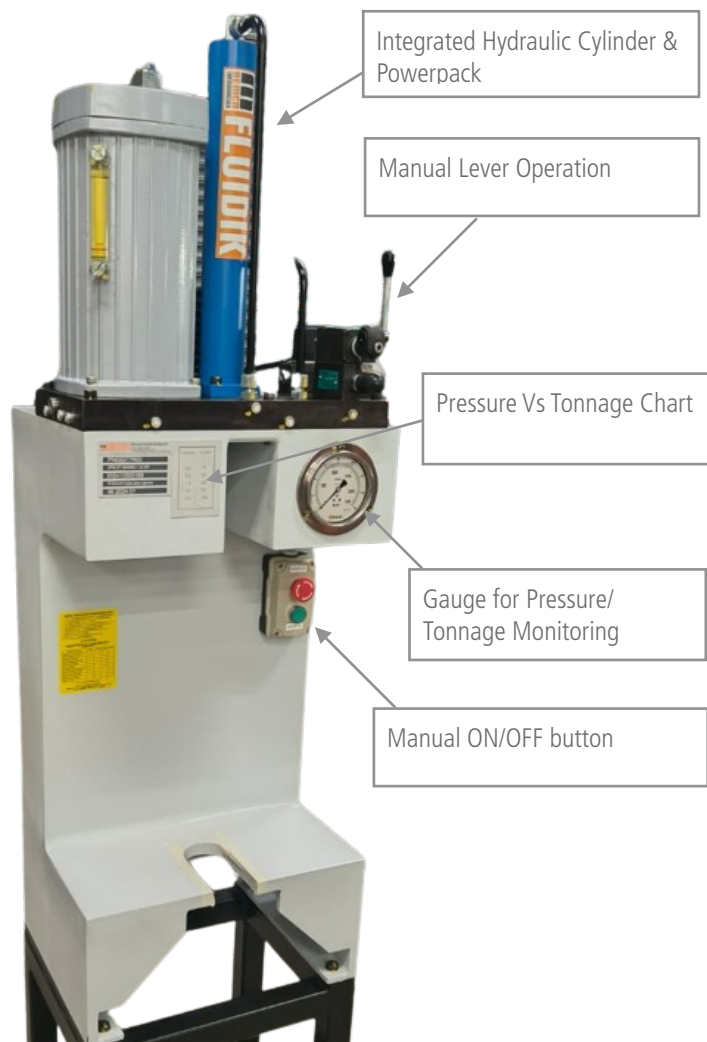


Introducing X!Press, the compact hydraulic press designed as a multi-function modular equipment with push force up to 10T. The integrated hydraulic power-unit with pressing cylinder is mounted on a frame to ready a hydraulic press within minutes!

The equipment is ready to use and can be customised as per application requirements. Consult factory for additional accessories and customisations.

Key Features:

- Integrated design with power-unit, cylinder and frame
- Various tonnage option up to 10T with same footprint
- Small envelope area
- Low weight for ease of handling and mounting
- In-built starter panel with air-oil cooler and valve stack
- Compact power-pack with 4ltr oil filling volume
- Manual hand lever actuation
- No additional piping and tubing

Dimensional Details

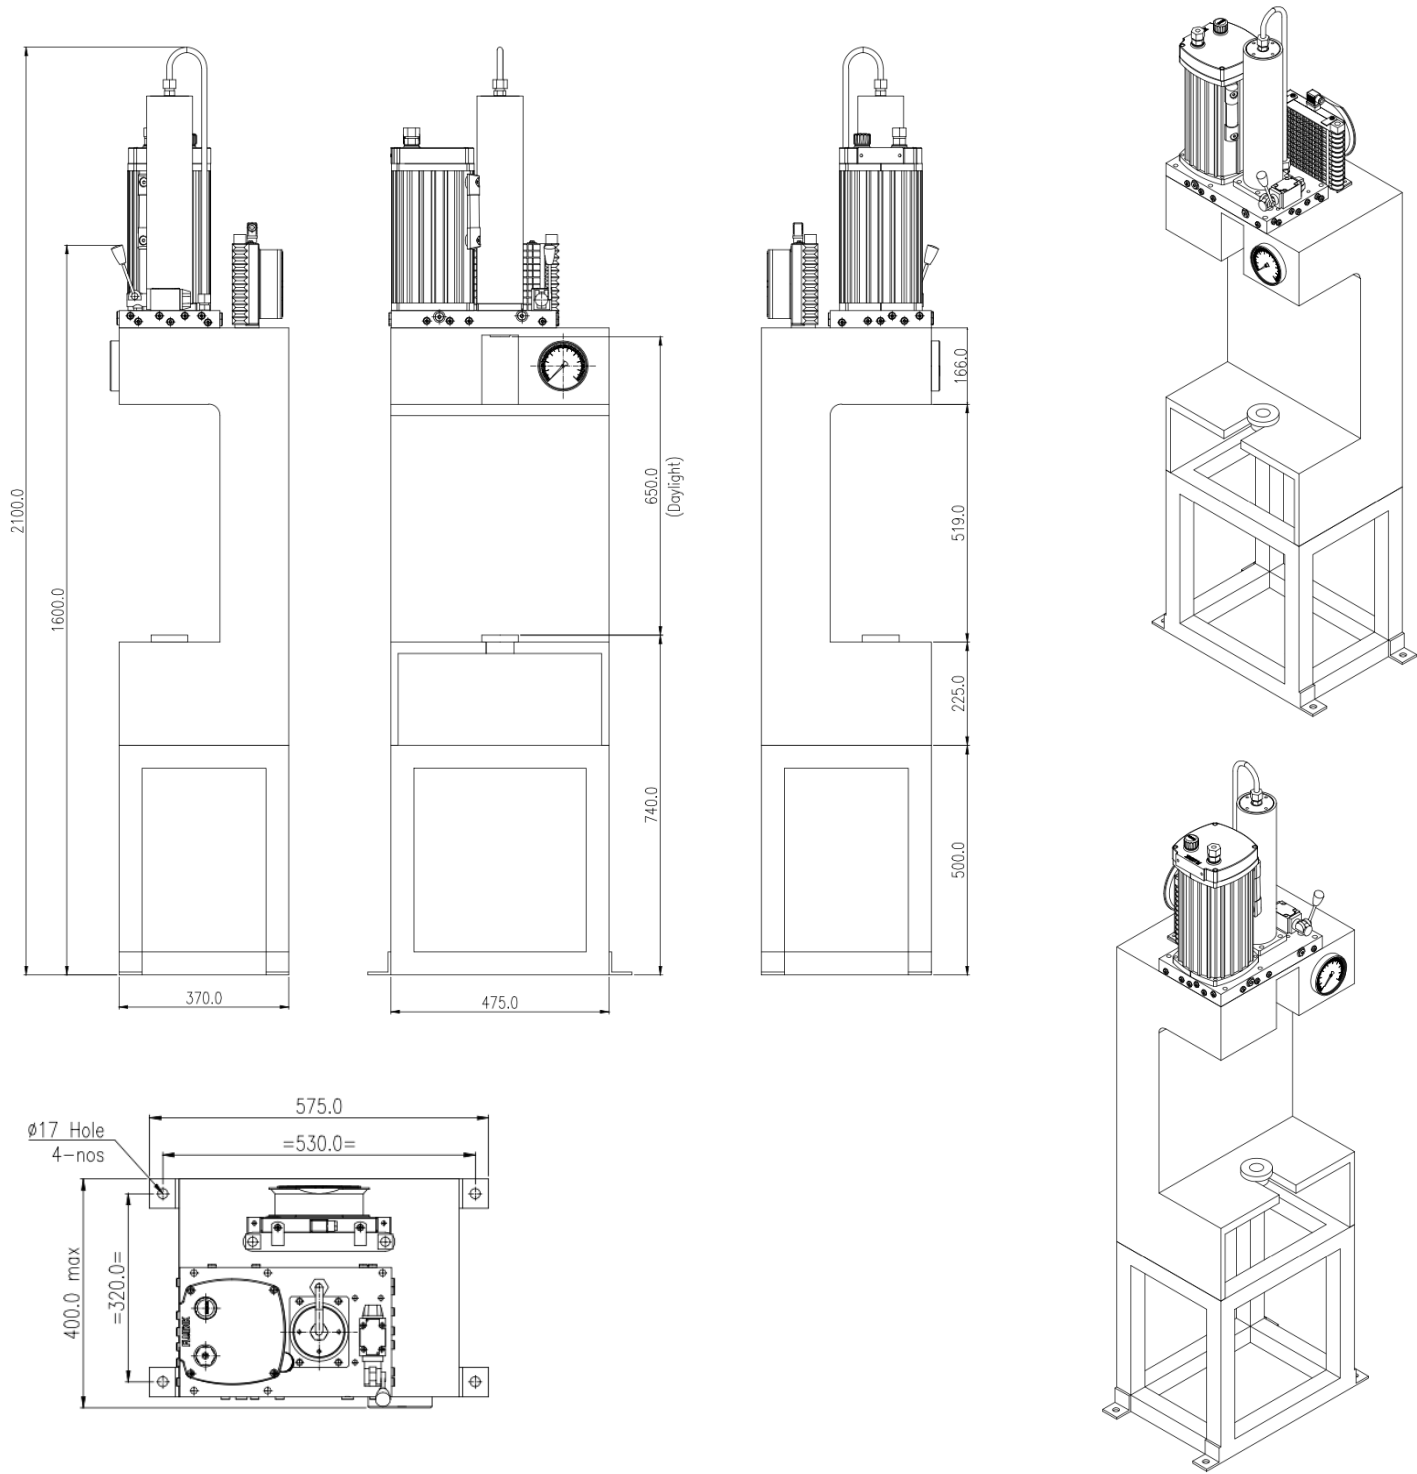

All dimensions in mm

Spares List

Seal Kit 5T	SSVXPS5T
Seal Kit 10T	SSVXPS10T

BEMCO FLUIDTECHNIK LLP, Khanapur Road, Udyambag, Belgaum - 590 008 KA IN +91 831 4263001 info@fluidik.co

This document including the data, specifications and other product information are the exclusive property of BEMCO FLUIDTECHNIK LLP. It may not be reproduced or shared to third parties without written consent. The data specified above only serve to describe the product and no statements concerning a certain condition or suitability for a certain application can be derived from this information. The information given does not release the user from the obligation of own judgment and verification of suitability of the product for the application requirements.

