


R2110 DC* MOTOR 1100 DC SERIES

*Patent Pending

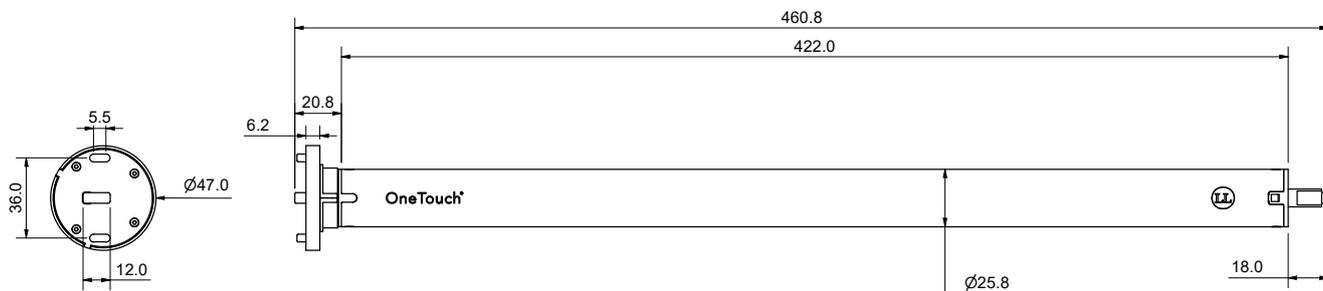

PERFORMANCE PARAMETERS:

1100 DC Series

Rated Torque	1.1Nm
Speed RPM	20/25/30rpm adjustable
Tube	35/40mm
Noise	30dBA Soft Whisper based on ISO3745
Protocol	Bi RF/BT
Frequency	433MHZ
IP Class	IP20
Operation	RF Remote Control Smart Control/BT
Charging Port	USB-C Internal Antenna
Battery Capacity	7.4v 2600mAh
Charge Time	< 8 hrs
Rapid Charge Option	No
Battery Level Indicator	LED/Beep/Remote 16 channel
Blind Width	Min 520mm
Weight Capacity	3.5kg

SMART ACTIVATION using Smart Hub



ACCESSORIES



R2180-1CH
Single Channel
Remote Control



R2185-6CH
6 Channel
Remote Control



R2191-16CH*
Wall Remote



R2190-16CH*
16 Channel
Remote Control



R2195
Smart Hub

MAXIMUM BLIND SIZE

	FABRIC GROUP	BLIND WIDTH (m) FOR BLIND DROP (m) (Max deflection 6mm)					40HD TUBE
		0.5	1.0	1.5	2.0	2.5	
35°	up to 200g/m sq	3.0	3.0	3.0	2.0		
	200 > 320g/m sq	2.0	2.0	2.0	2.0		
	320 > 485g/m sq	2.0	2.0	2.0	1.5		
40°	up to 200g/m sq	5.0	5.0	5.0	5.0	5.0	5.0
	200 > 320g/m sq	4.0	4.0	4.0	4.0	4.0	3.75
	320 > 485g/m sq	5.0	5.0	5.0	3.5	2.7	2.1