

**800x1600mm**  
80x160cm



**fantastic  
format**




800x1600 mm

GRISIAL GREY



800 x 1600

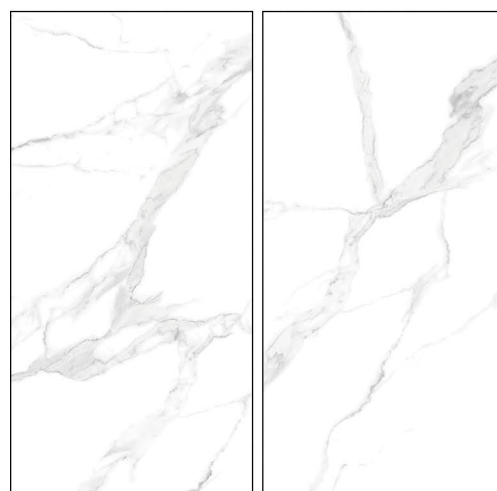

GLOSSY

RANDOM

800x1600 mm

MARBLE CARRARA



800 x 1600



RANDOM

  
GLOSSY

800x1600 mm

BLACK COSMOS



RANDOM

800 x 1600



**HG**  
HIGH GLOSS

800x1600 mm

MONT GOLD



800 x 1600

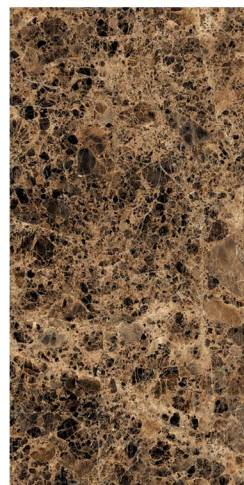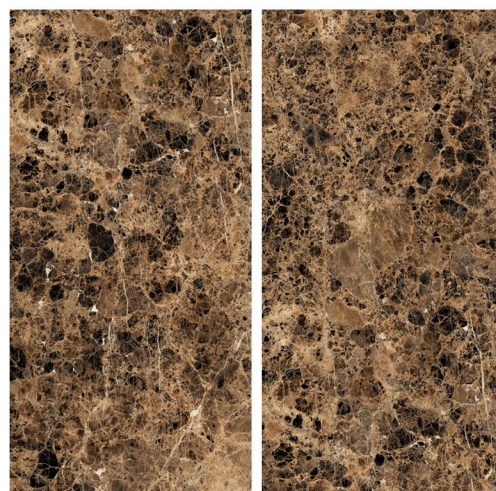

RANDOM

**HG**  
HIGH GLOSS

800x1600 mm

SLATE BLACK



800 x 1600

RANDOM



  
GLOSSY


800x1600 mm

SLATE BONE



800 x 1600

RANDOM

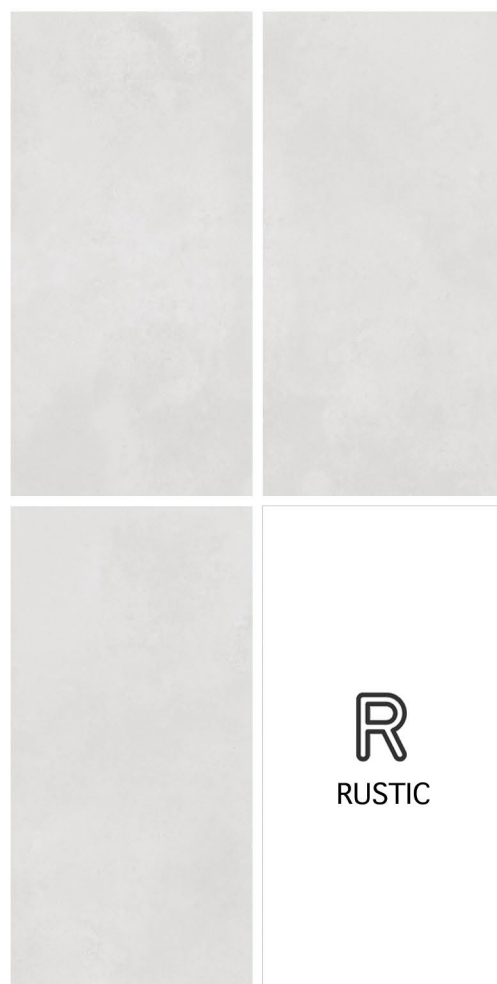


R  
RUSTIC

800x1600 mm

ARMANI DARK GRIS



800 x 1600

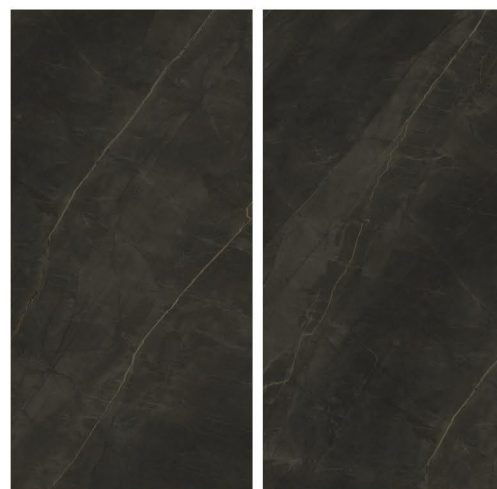


C  
CARVING

RANDOM




800x1600 mm

FLORIANA MOSH

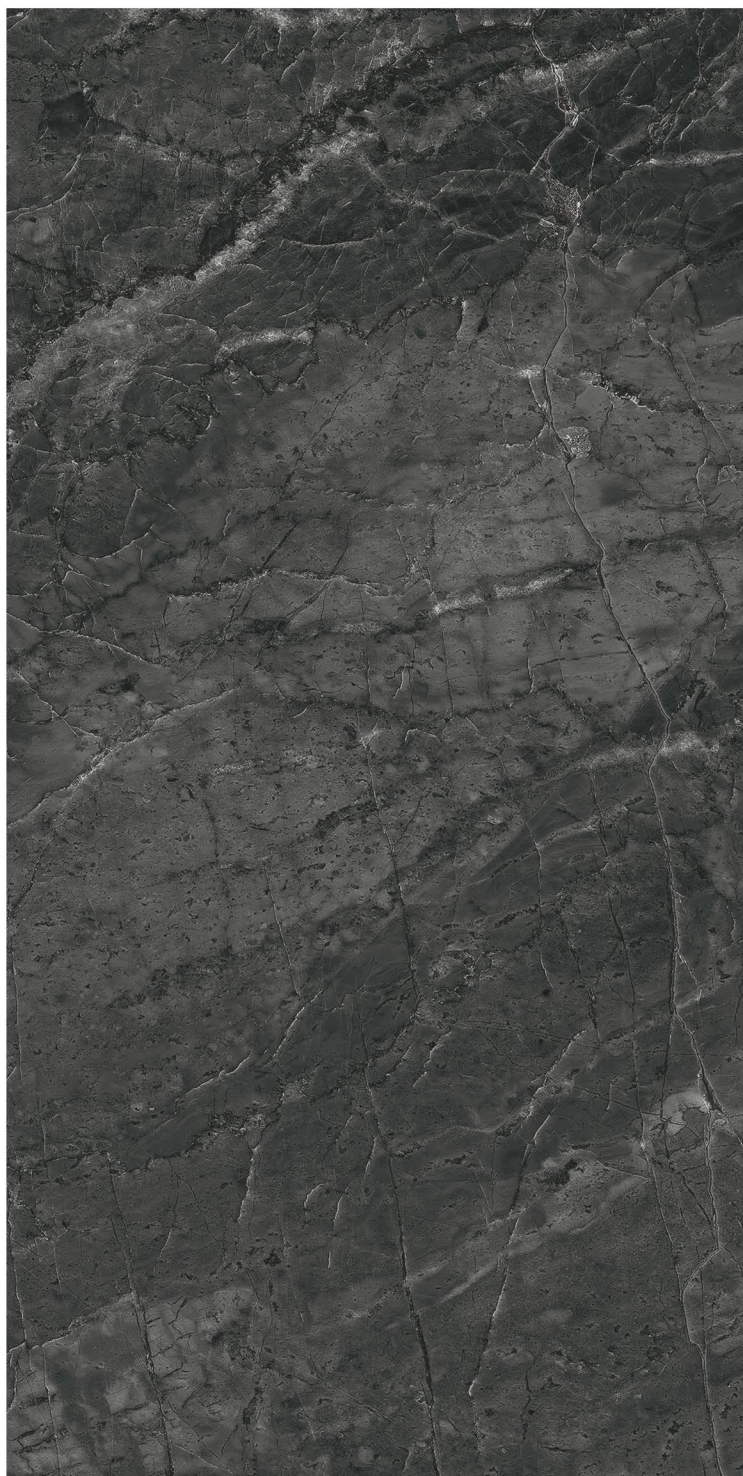

800 x 1600

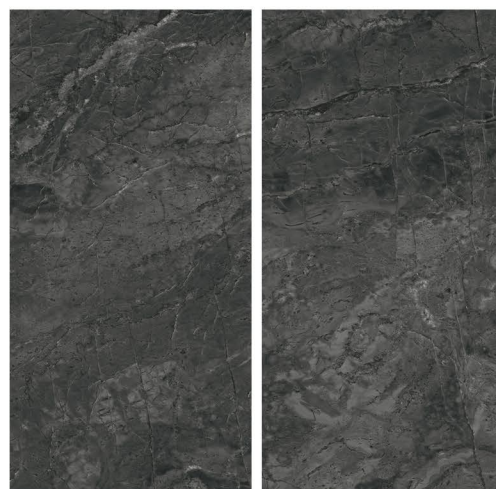

RANDOM

C  
CARVING

800x1600 mm

FLORIANA PEARL



800 x 1600



RANDOM



C  
CARVING

800x1600 mm

IMPERIAL WHITE



800 x 1600



C  
CARVING

RANDOM

800x1600 mm

TRAVA GRIS



800 x 1600



RANDOM



C  
CARVING

800x1600 mm

TRAVA NUEZ



800 x 1600



RANDOM



C  
CARVING

## TECHNICAL SPECIFICATIONS

CHARACTERISTICS	STANDARD AS PER ISO-13006/EN14411 GROUP B1A	MEAN VALUE OF PGVT	MEAN VALUE OF GVT	TEST METHOD
<b>REGULATORY PROPERTIES</b>				
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Rectangularity	±0.6 %	±0.1 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	No change	ISO-10545-16
Glossiness	As per mfg.	Min. 90	Min.10	GLOSSOMETER
<b>SURFACE MECHANICAL PROPERTIES</b>				
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	> 2.10 g/cc	DIN 51082
<b>MASSIVE MECHANICAL PROPERTIES</b>				
Modulus of rupture	Min. 35 N/mm <sup>2</sup>	Min. 40 N/mm <sup>2</sup>	Min. 40 N/mm <sup>2</sup>	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	Min. 0.55	ISO-10545-5
<b>SURFACE MECHANICAL PROPERTIES</b>				
Surface abrasion resistance	As per mfg	Min. Class-3	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	Min. 5	EN 101
<b>THERMO HYDROMETRIC PROPERTIES</b>				
Frost resistance	No damage	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0x10 <sup>-6</sup>	Max. 6.5x10 <sup>-6</sup>	Max. 6.5x10 <sup>-6</sup>	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11
<b>CHEMICAL PROPERTIES</b>				
Chemical resistance	No damage	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14
<b>SAFETY PROPERTIES</b>				
Slip resistance	As per mfg.	> 0.40	> 0.40	ISO-10545-17
Fire resistance	As per mfg.	Fireproof	Fireproof	N. A.
Lead & Cadmium given off by glazed tiles	As per mfg.	Doesn't yield Pb & Cd	Doesn't yield Pb & Cd	ISO-10545-15

## PACKING DETAILS

Size	Thickness (approx*)	Pieces / Box	Area / Box (approx*)		Weight / Box (approx*)
800X1600MM	9MM	2 pcs.	2.56 sq. mtr.	27.55 sq.ft.	54 kgs.