



FibrePros

The Catalogue

FIBRE OPTIC

LIGHTING



Who We Are

FibrePros was established in 1995 in partnership with SuperVision U.S.A. FibrePros were the first fibre optic lighting company to set up in the U.A.E. Quite simply, we're industry pioneers.

FibrePros have created stunning panoramic constellations in the lofty heights of the world's biggest shopping Mall, our SideGlow cable has adorned landmark guitars at the Hard Rock Cafe's first flagship in the Middle East, we have illuminated priceless museum artifacts, our lighting systems cascade and sparkle across the regions swimming pools. We do fibre optics and we do it very well.

FibrePros offer an extensive range of internal and external LED light sources, the highest quality fibre optic cable available and exquisite end fittings. Our lighting systems are built on the foundations of technical expertise.

What We Do



Contents

1 Light Sources

Page 1	FP5600
Page 3	FP5200
Page 4	FP4000
Page 5	FP4400
Page 6	FP2500
Page 7	FP2200
Page 8	FP150
Page 9	FP50

2 Optical Fibre


Page 9	SideGlow
Page 12	EndGlow
Page 17	Raw Fibre
Page 21	Crackled Fibre
Page 25	Weave
Page 27	Ribbon

3 End Fittings

Page 29	Crystal
Page 33	Submersion
Page 38	Paver
Page 44	Ceiling
Page 52	Decorative

4 Accessories

Page 58	DMX XLR
Page 59	Fibre Optic Harness
Page 60	P-Clips & Tracking



1

Light Sources

Light Sources

FP5600

Features

UL Listed for Wet Locations
Stand-alone operable
USB programmable
Manual, 0-10V and DMX controllable
Mixed Colour or Single Bright White

Operating Environment

Ingress Protection: IP65
Exposure: Outdoor
Operating Temperature: 0° to 40° C
Storage Temperature: -40° to 70° C
Airflow: 36 cfm
Acoustic Noise: 33 dBA

Mounting

OK to mount in any orientation
Best orientation is with exhaust vent facing up
Keep vents free from obstruction

Mechanical

Material/Finish: Black Anodized
Aluminum Iron Plate
Weight: 4.08kgs
Dimensions: 11.1" × 8.5" × 4.4"
DC Input Cord Length: 6ft

Electrical

Input Voltage: 24V DC
Power Consumption: 120W Max



Device Colour	Port Lumens*	Minimum CRI
Mixed RGBA	650/1100/500/650lm	N/A
Mixed RGBW	650/1100/500/1250lm	N/A
3000K White	3950lm	85
4200K White	4050lm	85

Light Sources

FP5200

Features

UL Listed for Dry Locations
Stand-alone operable
USB programmable
Manual, 0-10V and DMX controllable
Mixed Colour or Single Bright White

Operating Environment

Ingress Protection: IP20
Exposure: Outdoor
Operating Temperature: 0° to 40° C
Storage Temperature: -40° to 70° C
Airflow: 36 cfm
Acoustic Noise: 31 dBA

Mounting

OK to mount in any orientation
Best orientation is with exhaust vent facing up
Keep vents free from obstruction

Mechanical

Material/Finish: Black Anodized
Aluminum Iron Plate
Weight: 4.17kgs
Dimensions: 11.8" × 5.3" × 4.3"
DC Input Cord Length: 6ft

Electrical

Input Voltage: 24V DC
Power Consumption: 120W Max



Device Colour	Port Lumens*	Minimum CRI
Mixed RGBA	650/1100/500/650lm	N/A
Mixed RGBW	650/1100/500/1250lm	N/A
3000K White	3950lm	85
4200K White	4050lm	85

Light Sources

FP4800

Features

UL Listed for Dry Locations
Stand-alone operable
Mixed Colour or Single Bright White

Operating Environment

Ingress Protection: IP20
Exposure: Indoor
Operating Temperature: -10° to 40°C
Storage Temperature: -40° to 70°C

Mounting

OK to mount in any orientation
Best orientation is with exhaust vent facing up
Keep vents free from obstruction

Mechanical

Material/Finish: Black Anodized
Aluminum Iron Plate
Weight: 4.07kgs
Dimensions: 241mm x 261mm x 125mm
DC Input Cord Length: 6ft

Electrical

Input Voltage: 230V AC
Power Consumption: 60W Max



Device Colour	Port Lumens*	Minimum CRI
3000K	5900lm	90
4000K	6500lm	90
5700K	5500lm	90

Light Sources

FP4000

Features

UL Listed for Wet Locations
Stand-alone operable
Manual, 0-10V and DMX controllable
Mixed Colour or Single Bright White

Operating Environment

Ingress Protection: IP65
Exposure: Outdoor
Operating Temperature: 10° to 40°C
Storage Temperature: -12° to 52°C

Mounting

OK to mount in any orientation

Mechanical

Material/Finish: Die-cast Aluminum
Weight: 3.31kgs
Dimensions: 270mm × 170mm × 144mm
DC Input Cord Length: 6ft

Electrical

Input Voltage: 100-240V AC
Power Consumption: 60W Max



Device Colour	Port Lumens*	Minimum CRI
2700K White	5900lm	80
3000K White	6000lm	80
4000K White	5950lm	80
RGB	5500lm	80

Light Sources

FP2500

Features

UL Listed for Wet Locations
Stand-alone operable
Manual, 0-10V and DMX controllable
Mixed Colour or Single Bright White

Operating Environment

Ingress Protection: IP65
Exposure: Outdoor
Operating Temperature: 10° to 50°C
Storage Temperature: -40° to 70°C

Mounting

OK to mount in any orientation

Mechanical

Material/Finish: Black Coated Aluminum
Weight: 2.0kgs
Dimensions: 240mm x 168mm x 98mm
DC Input Cord Length: 6ft

Electrical

Input Voltage: 12V DC
Power Consumption: 25W Max



Device Colour	Port Lumens*	Minimum CRI
2700K White	1600lm	80
3000K White	1650lm	80
4000K White	1800lm	80
6000K White	1700lm	80
RGBW	7500lm	80

Light Sources

FP2200

Features

UL Listed for Dry Locations
Stand-alone operable
Manual, 0-10V and DMX controllable
Mixed Colour or Single Bright White

Operating Environment

Ingress Protection: IP20
Exposure: Indoor
Operating Temperature: -10° to 40°C
Storage Temperature: -40° to 70°C

Mounting

OK to mount in any orientation
Best orientation is with exhaust vent facing up
Keep vents free from obstruction

Mechanical

Material/Finish: Silver Anodized Aluminum
Weight: 1.1kgs
Dimensions: 90mm x 190mm x 183mm
DC Input Cord Length: 6ft

Electrical

Input Voltage: 12V DC
Power Consumption: 40W Max



Device Colour	Port Lumens*	Minimum CRI
RGB	670/1250/370lm	N/A
3000K White	4200lm	90
4000K White	4550lm	90
5500K White	5500lm	90

Light Sources

FP150

Features

UL Listed for Dry Locations
Stand-alone operable
Manual, Remote Operated
Mixed Colour or Single Bright White

Operating Environment

Ingress Protection: IP20
Exposure: Indoor
Operating Temperature: -10° to 40°C
Storage Temperature: -40° to 70°C

Mounting

OK to mount in any orientation
Best orientation is with exhaust vent facing up
Keep vents free from obstruction

Mechanical

Material/Finish: Silver Anodized Aluminum
Weight: 0.21kgs
Dimensions: 185mm x 50mm x 46mm
DC Input Cord Length: 6ft

Electrical

Input Voltage: 12V DC, 24 DC
Power Consumption: 7W Max



Device Colour	Port Lumens*	Minimum CRI
RGB	125/230/65lm	N/A
3000K White	700lm	90
4000K White	770lm	90
5500K White	770lm	90

Light Sources

FP50

Features

UL Listed for Dry Locations
Stand-alone operable
Manual, Remote Operated
Mixed Colour or Single Bright White

Operating Environment

Ingress Protection: IP20
Exposure: Indoor
Operating Temperature: 10° to 40° C
Storage Temperature: -40° to 70° C

Mounting

OK to mount in any orientation
Best orientation is with exhaust vent facing up
Keep vents free from obstruction

Mechanical

Material/Finish: Silver Anodized Aluminum
Dimensions: 26mm x 80mm
DC Input Cord Length: 6ft

Electrical

Input Voltage: 100-240V AC
Power Consumption: 3W Max



Device Colour	Port Lumens*	Minimum CRI
RGB	65/120/35lm	N/A
3000K White	330lm	90
4000K White	360lm	90
5500K White	360lm	90



2

Optical Fibre

Optical Fibre Sideglow

SideGlow™ cable is a safe alternative to neon.

It can change colours, is virtually unbreakable and is 'energy efficient'.

Suitable for interior and exterior applications it is UV protected and has an algaecide and fungicide treated exterior jacket for maximum durability against the elements.

SideGlow™ cable is strong enough for amusement park rides, extreme cold weather as well as underwater applications.

With no heat or electricity in the cable, typical lighting design restrictions are eliminated, creating a multitude of design possibilities.

The SideGlow™ cable is made up of .030"/0.75mm diameter PMMA acrylic optical fibres twisted (FP42, FP84, FP126 only) within a flexible clear jacket.

The fibres are twisted around a highly reflective PVC internal core that offers flexible stability with maximum light output.




Optical Fibre SideGlow


The cable diameter is determined by the fibre quantity:

No. of Fibres	Diameter (inches)	Diameter (mm)
32 fibres	.312"	7.9mm
42 fibres	.375"	9.5mm
84 fibres	.5"	12.7mm
126 fibres	.635"	15.9mm


Optical Fibre Sideglow

**Model No.****FP32SG**


SideGlow™ is an untwisted cable, .312" (7.9mm) in diameter.
There are 32 multistrand .030" (0.75mm) fibres in a clear PVC jacket.
Maximum (smallest) Bend Radius = 1"

**Model No.****FP42SG**

SideGlow™ is an untwisted cable, .375" (9.5mm) in diameter.
There are 42 multistrand .030" (0.75mm) fibres in a clear PVC jacket.
Maximum (smallest) Bend Radius = 1"

**Model No.****FP84SG**

SideGlow™ is an untwisted cable, .5" (12.7mm) in diameter
There are 84 multistrand .030" (0.75mm) fibres in a clear PVC jacket.
Maximum (smallest) Bend Radius = 1.5"

**Model No.****FP126SG**

SideGlow™ is an untwisted cable, .625" (15.9mm) in diameter
There are 126 multistrand .030" (0.75mm) fibres in a clear PVC jacket.
Maximum (smallest) Bend Radius = 1.5"

Optical Fibre

EndGlow

EndGlow® cable is multistrand fibres protected in a flexible PVC jacket for ease of handling and fibre protection.

EndGlow® cable is ideal for use with architectural lighting fixtures, water-tight lenses, feature and lights and Endglow® signage.

Note: When ordering cable, specify length by quantity in terms of metres.

Spools are established lengths and will not be cut shorter. If specific lengths are required, order each individual cable cut to length.

.030" diameter untwisted PMMA acrylic optical fibres within a flexible PVC jacket.

(Diametre is based on fibre quantity)



Optical Fibre

EndGlow

The cable diameter is determined by the fibre quantity:

No. of Fibres	Diameter (inches)	Diameter (mm)
0.5 fibre	.039"	1.0
0.75 fibre	.039"	1.0
1 fibre	.078"	2.0
1.5 fibres	.098"	2.5
2 fibres	.118"	3.0
4 fibres	.125"	3.2
8 fibres	.187"	4.8
12 fibres	.218"	5.5
25 fibres	.25"	6.36
50 fibres	.312"	7.9
75 fibres	.375"	9.5

Optical Fibre

EndGlow

.039"
(1mm)



Model No.

FP0.5EG

EndGlow® End emitting cable, .039" (1mm) in diameter Black jacket with 1 straight .019"(0.5mm) fibre optic strand. Maximum (smallest) Bend Radius = .5" (12.7mm)

.039"
(1mm)



Model No.

FP0.75EG

EndGlow® End emitting cable, .039" (1mm) in diameter Black jacket with 1 straight .030"(0.75mm) fibre optic strand. Maximum (smallest) Bend Radius = .5" (12.7mm)

.078"
(2mm)



Model No.

FP1.0EG

EndGlow® End emitting cable, .078" (2mm) in diameter Black jacket with 1 straight .039"(1.0mm) fibre optic strand. Maximum (smallest) Bend Radius = .5" (12.7mm)

.098"
(1.5mm)



Model No.

FP1.5EG

EndGlow® End emitting cable, .098" (1.5mm) in diameter Black jacket with 1 straight .060"(1.5mm) fibre optic strand. Maximum (smallest) Bend Radius = .5" (12.7mm)

.118"
(3mm)



Model No.

FP2.0EG

EndGlow® End emitting cable, .118" (3mm) in diameter Black jacket with 1 straight .079"(2.0mm) fibre optic strand. Maximum (smallest) Bend Radius = .5" (12.7mm)

Optical Fibre

EndGlow

.125"
(3.2mm)



Model No.

FP4.0EG

EndGlow® End emitting cable, .125" (3.2mm) in diameter Black jacket with 4 straight .030"(0.75mm) fibre optic strand. Maximum (smallest) Bend Radius = .5" (12.7mm)

.187"
(4.8mm)



Model No.

FP8.0EG

EndGlow® End emitting cable, .187" (4.8mm) in diameter Black jacket with 8 straight .030"(0.75mm) fibre optic strand. Maximum (smallest) Bend Radius = .5" (12.7mm)

.218"
(5.5mm)




Model No.

FP12.0EG

EndGlow® End emitting cable, .218" (5.5mm) in diameter Black jacket with 12 straight .030"(0.75mm) fibre optic strand. Maximum (smallest) Bend Radius = .5" (12.7mm)

.250"
(6.36mm)



Model No.

FP25.0EG

EndGlow® End emitting cable, .250" (6.36mm) in diameter Black jacket with 25 straight .030"(0.75mm) fibre optic strand. Maximum (smallest) Bend Radius = 1" (25.4mm)

Optical Fibre

EndGlow

.312"
(7.9mm)




Model No.

FP50.0EG

EndGlow® End emitting cable, .312" (7.9mm) in diameter Black jacket with 50 straight .030" (0.75mm) fibre optic strand. Maximum (smallest) Bend Radius = 1" (25.4mm)

.312"
(7.9mm)



Model No.

FP75.0EG

EndGlow® End emitting cable, .375" (9.5mm) in diameter Black jacket with 75 straight .030" (0.75mm) fibre optic strand. Maximum (smallest) Bend Radius = 1.5" (38.09mm)

Optical Fibre

Raw Fibre

Raw Endpoint Fibres are single strand PMMA acrylic optical fibres, available in a wide range of diameters for a variety of applications. Endpoint fibres are ideal for star field ceilings, point-of-purchase displays, floor tiles, wallscapes and spectacular displays

Endpoint fibre is offered on a spool as an individual strand. This is the most economical

way to purchase fibre optics. However, caution must be exercised when handling these individual fibres as they do not have a protective PVC jacket.

The most common use for individual spools are for End Point applications such as star field ceilings, endpoint signs and displays.



Optical Fibre


Raw Fibre

The cable diameter is determined by the fibre quantity:

No. of Fibres	Diameter (inches)	Diameter (mm)
PAF20	.020"	0.5
PAF30	.030"	0.75
PAF40	.040"	1.0
PAF60	.060"	1.5
PAF80	.080"	2.0
PAF120	.120"	3.0

Optical Fibre

Raw Fibre



Model No.
PAF20

Raw Fibre End emitting cable, .020" (0.5mm) in diameter. Maximum (smallest) Bend Radius = 15mm



Model No.
PAF30

Raw Fibre End emitting cable, .030" (0.75mm) in diameter. Maximum (smallest) Bend Radius = 15mm



Model No.
PAF40

Raw Fibre End emitting cable, .040" (1.0mm) in diameter. Maximum (smallest) Bend Radius = 15mm




Model No.
PAF60

Raw Fibre End emitting cable, .060" (1.5mm) in diameter. Maximum (smallest) Bend Radius = 15mm

Optical Fibre


Raw Fibre



Model No.

PAF20

Raw Fibre End emitting cable, .080" (2.0mm) in diameter. Maximum (smallest) Bend Radius = 15mm



Model No.

PAF20

Raw Fibre End emitting cable, .120" (3.0mm) in diameter. Maximum (smallest) Bend Radius = 15mm

Optical Fibre Crackled

Crackled fibre optic cable has continuous micro-window side-sparkle illumination.

Randomized bursts of side-emitting light create a sparkle effect. Untwisted multi-strand fibre housed in a clear PVC jacket. Crackled fibre optic cable is perfect for chandeliers and decorative design elements.

Note: When ordering cable, specify length by quantity in terms of feet. Spools are established lengths and will not be cut shorter. If specific lengths are required, order each individual cable cut to length. We can also customize cable quantities for jacketing.


Crackled is perfect for decorative features such as Chandeliers, backdrops and curtains. The clear PVC cladding has UV, fungicide and algae protection.



Optical Fibre Crackled

Model No.	Product	Structure	Description
FP0.75CR	Crackled, External 2.00mm	1 × 0.75mm	Clear
FP1.0CR	Crackled, External 3.20mm	1 × 1.0mm	Clear
FP1.5CR	Crackled, External 4.80mm	1 × 1.5mm	Clear
FP4.0CR	Crackled, External 5.50mm	4 × 0.75mm	PVC Tube
FP8.0CR	Crackled, External 4.80mm	8 × 0.75mm	PVC Tube
FP12.0CR	Crackled, External 5.50mm	12 × 0.75mm	PVC Tube

Optical Fibre Crackled



Model No.

FP0.75CR

Crackled Fibre End and Side emitting cable, .030" (0.75mm) in diameter. Maximum (smallest) Bend Radius = 15mm



Model No.

FP1.0CR

Crackled Fibre End and Side emitting cable, .040" (1.0mm) in diameter. Maximum (smallest) Bend Radius = 15mm



Model No.

FP1.5CR

Crackled Fibre End and Side emitting cable, .060" (1.5mm) in diameter. Maximum (smallest) Bend Radius = 15mm



Model No.

FP4.0CR

Crackled Fibre End and Side emitting cable, .125" (3.2mm) in diameter jacket with 4 straight .030"(0.75mm) fibre optic strand. Maximum (smallest) Bend Radius = .5" (12.7mm)

Optical Fibre Crackled



Model No.

FP8.0EG

Crackled Fibre End and Side emitting cable,, .187" (4.8mm) in diameter jacket with 8 straight

.030"(0.75mm) fibre optic strand. Maximum (smallest) Bend Radius = .5" (12.7mm)



Model No.

FP12.0EG

Crackled Fibre End and Side emitting cable,, .218" (5.5mm) in diameter jacket with 12 straight

.030"(0.75mm) fibre optic strand. Maximum (smallest) Bend Radius = .5" (12.7mm)

Optical Fibre Weave

Weave Fibre Optic Cable, combines strands of PMMA fibre, woven in a mesh like structure to create something truly unique.

Light twists and turns throughout the structure thanks to its unique design. Using multiple light sources allows for a multitude of light to coarse throughout bringing a newly discovered effect to the world of fibre.

A perfect solution to wrapping fibre around structures and objects.

Using 0.75mm side emitting fibre optic cable, it's able to bend around the tightest of angles whilst still maintaining an optimum light output.

5m lengths of the mesh are provided and cut to meet the desired lengths necessary. The Weave offers a 50cm (20inch) horizontal stretch.



Optical Fibre Weave

Model No.	Product	Structure	Description
FP5WE	Woven 0.75mm Fibre	50cm horizontal stretch	5m
FP10WE	Woven 0.75mm Fibre	50cm horizontal stretch	10m

Optical Fibre Ribbon

Ribbon fibre optic cable offers a new approach to uniform lighting. Pre-fitted in PMMA malleable binding, this cable brings new versatility to parallel application.

The limitation being an only side bending option for the fibre, it allows a new approach to maintaining consistency across longer distances.

The ideal fibre for creative outlets.

Using 1-2mm side emitting fibre optic cable, it's able to bend around the tightest of angles whilst still maintaining an optimum light output.

5m lengths of the Ribbon are provided and cut to meet the desired lengths necessary.



Optical Fibre Ribbon

Model No.	Product	Structure	Description
FPRB	Ribbon Fibre Optic Cable	Cut to desired length	Min 5m




3

End Fittings

End Fittings Crystal

FP-CR1

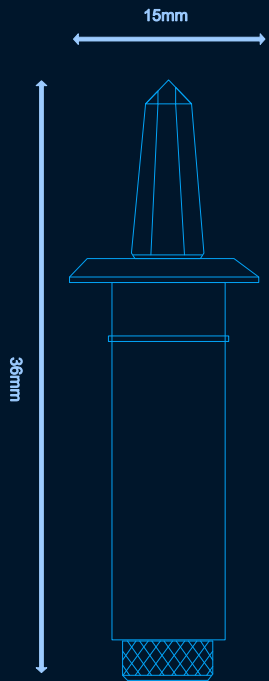

Our high quality crystal end fittings focus on illuminating around the end points to convey a decorative pattern dependent on the crystal in place.

This fixture is ideally coupled with our EndGlow fibre to maximise the light output and focus directly on the end point. The fibre sizes preferred for this model are; EG1.0, EG1.5, and EG2.0 depending on the desired effect.


All of our crystal fixtures come with inner tubes to hold the fibre in the desired position.

The FP-CR1 is ideally used on decorative ceilings/chandeliers/signage



End Fittings Crystal

FP-CR2

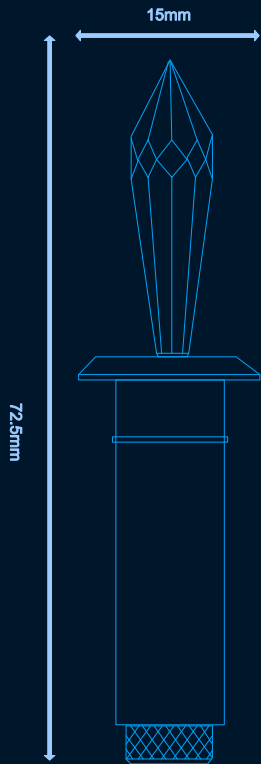

Our high quality crystal end fittings focus on illuminating around the end points to convey a decorative pattern dependent on the crystal in place.

This fixture is ideally coupled with our EndGlow fibre to maximise the light output and focus directly on the end point. The fibre sizes preferred for this model are; EG1.0, EG1.5, and EG2.0 depending on the desired effect.

All of our crystal fixtures come with inner tubes to hold the fibre in the desired position.

The FP-CR2 is ideally used on decorative ceilings/chandeliers/signage



End Fittings Crystal


FP-CR3

Our high quality crystal end fittings focus on illuminating around the end points to convey a decorative pattern dependent on the crystal in place.

This fixture is ideally coupled with our EndGlow fibre to maximise the light output and focus directly on the end point. The fibre sizes preferred for this model are; EG1.0, EG1.5, and EG2.0 depending on the desired effect.

All of our crystal fixtures come with inner tubes to hold the fibre in the desired position.

The FP-CR3 is ideally used on decorative ceilings/signage

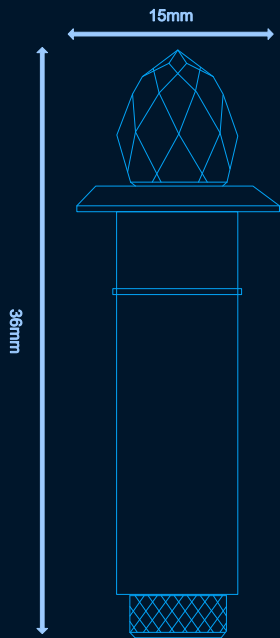

End Fittings Crystal


FP-CR4

Our high quality crystal end fittings focus on illuminating around the end points to convey a decorative pattern dependent on the crystal in place.

This fixture is ideally coupled with our EndGlow fibre to maximise the light output and focus directly on the end point. The fibre sizes preferred for this model are; EG1.0, EG1.5, and EG2.0 depending on the desired effect.


All of our crystal fixtures come with inner tubes to hold the fibre in the desired position.

The FP-CR4 is ideally used on decorative ceilings/walls/displays

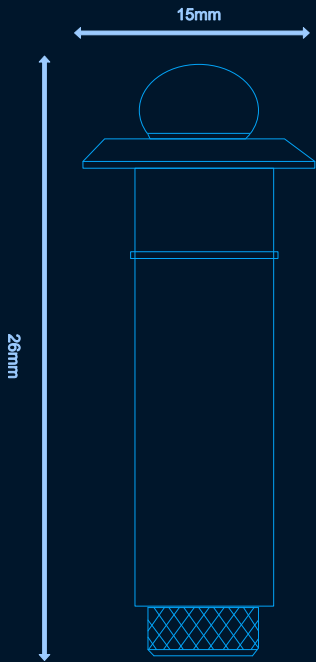

End Fittings Submersion

FP-SM1

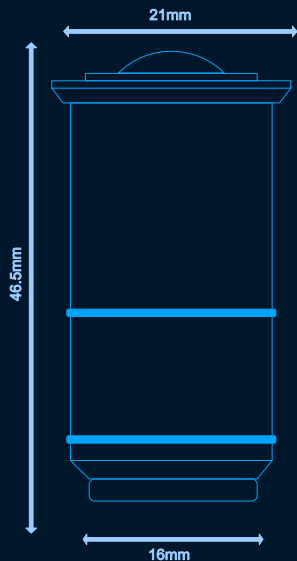

A medium sized steel submersible fitting with a domed glass window is the perfect accessory to water features with a backdrop.

With two rubber gauges attached it holds the fixture and fibre in place.

Despite being a submersible fixture it offers an array of different purposes dependent on the situation.

A suitable fixture for fountains, cascading waterfalls/infinity pools and dynamic water features.

The FP-SM1 is ideally used for EndGlow fibre; EG8.0, EG12.0, EG25.0



End Fittings Submersion


FP-SM2

A small sized submersible copper fitting with a domed glass window is the perfect accessory to water features and fountains.

With two rubber gauges attached, it holds the fixture and fibre in place securely and disperses any potential water leakage.


Despite being submersible, this fixture offers an array of different purposes dependent on the situation. It can be used in outdoor paver scenarios as well as facades.

The FP-SM2 is ideally used for Endglow fibre: EG1.0, EG1.5, EG2.0 and EG4.0

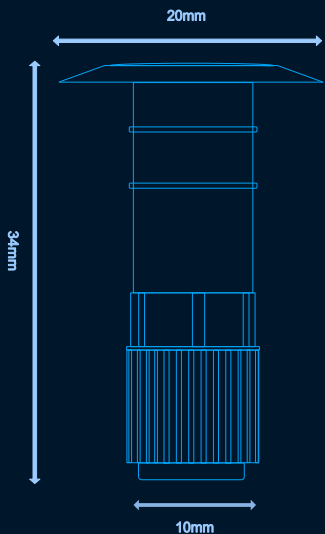

End Fittings Submersion

FP-SM3

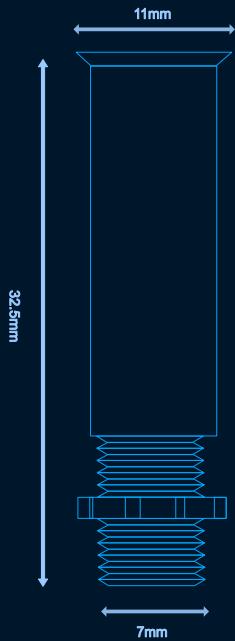

A small sized submersible stainless steel fitting with a countersink is the perfect accessory for water features, swimming pools and fountains.

The countersink allows it to be flush with whatever surface it is intended for.

Despite being submersible, this fixture offers an array of different purposes dependent on the situation. Countersink fixtures make for great pavers for landscaping such as decking.

The FP-SM3 is ideally used for Endglow fibre: EG1.0, EG1.5, EG2.0 and EG4.0



End Fittings Submersion


FP-SM4

A small sized submersible stainless steel fitting perfect for water features, swimming pools and fountains.

With adjustable fibre sleeves, it allows different sized fibres to all fit snugly within the fixture to stop any potential water seeping back in.


it also includes a screw nut to allow for extra security when fitting the fixture.

The FP-SM4 is ideally used for Endglow fibre: EG0.75, EG1.0, EG1.5, EG2.0 and EG4.0

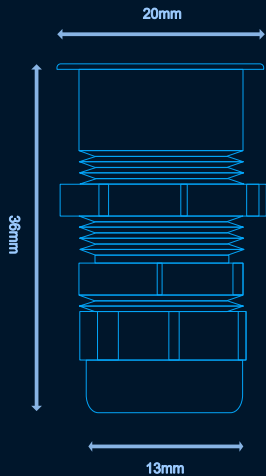

End Fittings Submersion

FP-SM5

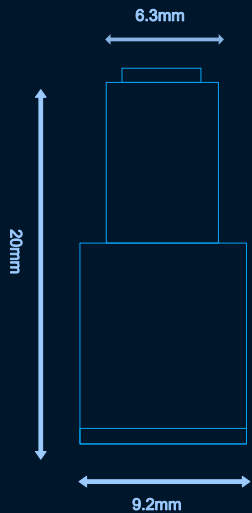

A small sized PVC submersible fitting with a flat head is the perfect accessory to water features.

Specially designed to withstand pool chemicals giving our fibre that extra protection.

A simpler solution to complex tiling procedures, this fixture is easily adaptable to those niche situations.

A suitable fixture for swimming pools, fountains and any water feature.

The FP-SM5 is ideally used for EndGlow fibre; EG2.0, EG4.0, EG8.0



End Fittings Submersion

FP-SM7


A large sized submersible stainless steel fitting perfect for water features, swimming pools and fountains.

The countersink allows it to be flush with whatever surface it is intended for.

Despite being submersible, this fixture offers an array of different purposes dependent on the situation. Countersink fixtures make for great pavers for landscaping such as decking.

It also includes an adjustable gland to allow for extra security when fitting the fibre within the fixture.

The FP-SM8 is ideally used for Endglow fibre: EG12.0, EG25.0, EG50.0 and EG75.0

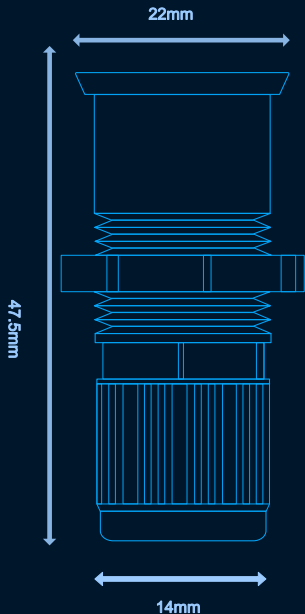

End Fittings Submersion

FP-SM8


A small sized PVC submersible fitting with a flat head is the perfect accessory to water features.

Specially designed to withstand pool chemicals giving our fibre that extra protection.

A simpler solution to complex tiling procedures, this fixture is easily adaptable to those niche situations.

A suitable fixture for swimming pools, fountains and any water feature.

The FP-SM6 is ideally used for EndGlow fibre; EG0.75, EG1.0, EG1.5, EG2.0

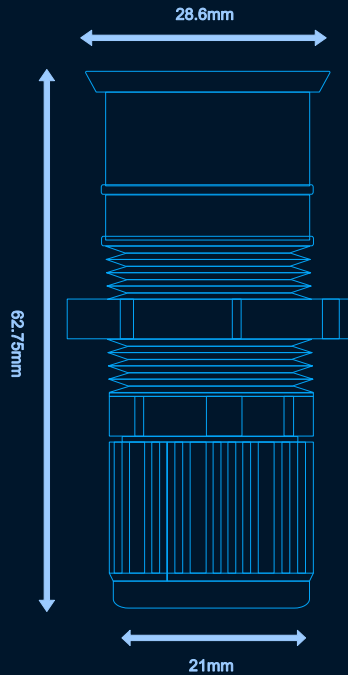

End Fittings Submersion

FP-SM6


A small sized PVC submersible fitting with a flat head is the perfect accessory to water features.

Specially designed to withstand pool chemicals giving our fibre that extra protection.

A simpler solution to complex tiling procedures, this fixture is easily adaptable to those niche situations.

A suitable fixture for swimming pools, fountains and any water feature.

The FP-SM6 is ideally used for EndGlow fibre; EG0.75, EG1.0, EG1.5, EG2.0

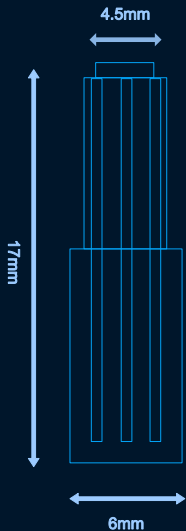

End Fittings

Paver

FP-PA1


A small round walkover paver with a frosted glass window gives this fixture a beautiful glowing effect.

With an adjustable backnut for extra security in regards to the fibre being used - especially when using smaller fibres.

Can be used in a variety of different structures and compounds such as; concrete, tiles, wood and acrylic.

A suitable piece for outdoor conditions.

The FP-PA1 is ideally used for EndGlow fibre; EG2.0, EG4.0 and EG8.0

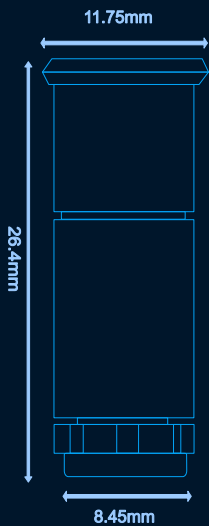

End Fittings

Paver


FP-PA4

A medium round walkover paver made to withstand heavy force.

A medium fixture applicable for uplighting. It also includes a silicone O-ring to allow for extra safety in wet environments.

It can be used in a variety of different structures and compounds such as; wood, concrete, acrylic and tiles.

The FP-PA4 is ideally used for Endglow fibre: EG1.0, EG1.5, EG2.0, EG4.0 and EG8.0

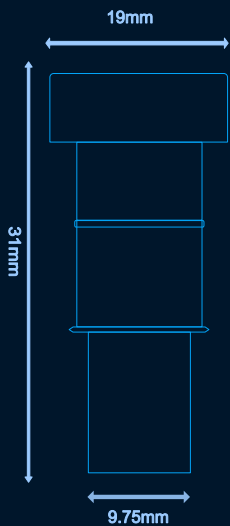

End Fittings

Paver


FP-PA5

A small round paver made to withstand heavy force.

A small fixture applicable for uplighting, with a pinhole lens to create focal points of light.

It can be used in a variety of different structures and compounds such as; wood, concrete, acrylic and tiles.

The FP-PA5 is ideally used for Endglow fibre: EG0.75, EG1.0, EG1.5, EG2.0 and EG4.0

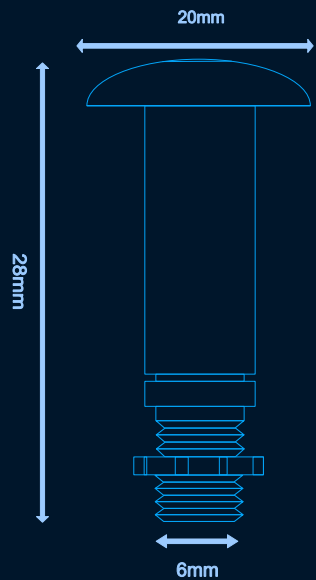

End Fittings

Paver


FP-PA6

A medium round paver made to withstand heavy force.

A medium fixture applicable for uplighting, with an angled lens to create a directional beam.

It can be used in a variety of different structures and compounds such as; wood, concrete, acrylic and tiles.

The FP-PA6 is ideally used for Endglow fibre: EG8.0, EG12.0 and EG25.0



End Fittings

Paver

FP-PA2


A small round walkover paver with a large bezel and clear glass window gives this fixture prioritizes light output in a narrow beam.

With an adjustable backnut for extra security in regards to the fibre being used - especially when using smaller fibres.

Can be used in a variety of different structures and compounds such as; concrete, tiles, wood and acrylic.

A suitable piece for outdoor conditions.

The FP-PA2 is ideally used for EndGlow fibre; EG1.0, EG1.5, EG2.0, EG4.0

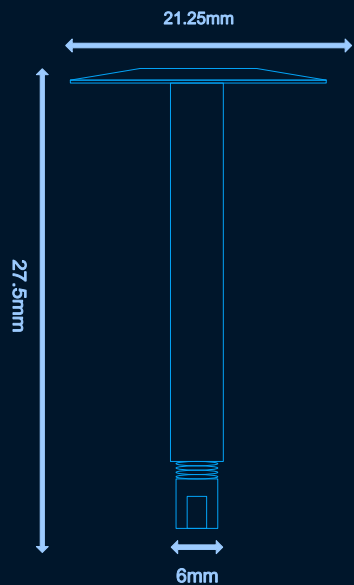

End Fittings

Paver


FP-PA3

A small round walkover paver made to withstand heavy force.

A medium fixture applicable for uplighting. It also includes a silicone O-ring to allow for extra safety in wet environments.

It can be used in a variety of different structures and compounds such as; wood, concrete, acrylic and tiles.

The FP-PA3 is ideally used for Endglow fibre: EG0.75, EG1.0, EG1.5 and EG2.0

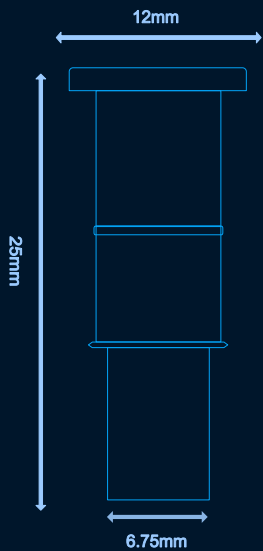

End Fittings

Ceiling


FP-CE1

A specially designed fitting that can be custom built onto EndGlow fibre arraying in different sizes. However, it can also be sold separately to fix onto pre-existing fibre.

With a screw top mechanism it's made to be purposed into ceilings of varying heights and depths whilst maintaining a consistent light output.

It can be used both indoor and outdoor application.

The FP-CE1 is ideally used for EndGlow fibre; EG0.75, EG1.0, EG1.5, EG2.0, EG4.0

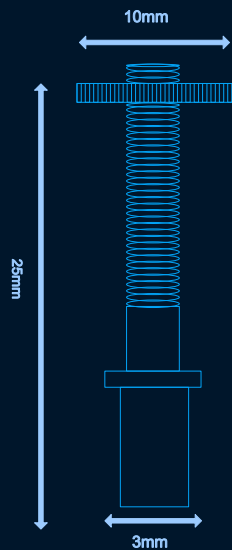

End Fittings

Ceiling

FP-CE2


This medium sized downlight ceiling fitting which can also be used in up-lighting scenarios too.

Secured into position with the aid of its source mounting clips.

It can be used both indoor and outdoor application.

A great alternative to display lighting and other focused applications.

The FP-CE2 is ideally used for EndGlow fibre; EG8.0 EG12.0, EG25.0, EG50.0, EG75.0

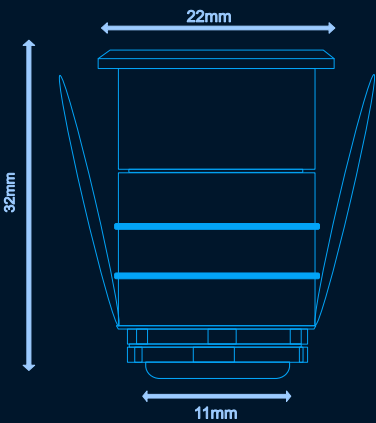

End Fittings Ceiling


FP-CE3

A very niche ceiling fitting which can alternatively work in a variety of circumstances including decorative design.

With an adjustable backnut for extra security in regards to the fibre being used - especially when using smaller fibres.

With an exposed lens, it offers unique versatility to other fixtures in the way that it illuminates.


The FP-CE3 is ideally used for EndGlow fibre; EG2.0, EG4.0 and EG8.0

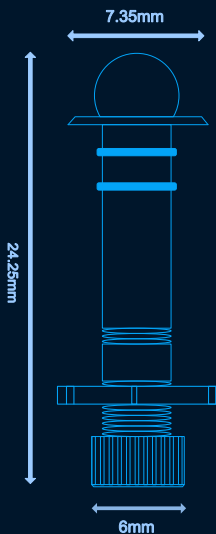

End Fittings

Ceiling

FP-CE4

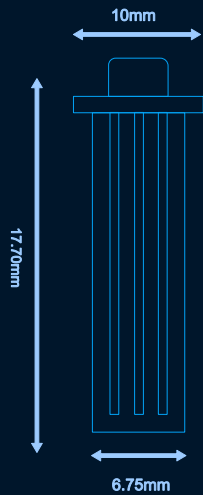

Our polycarbonate fitting range offers a simplistic way to focus and intensify end points of fibre.

Ideal for internal signage, ceiling effects and complimenting star field ceilings.

This specific fixture comes with a flat top in order to distribute the light evenly across the surface.

Although preferably and indoor fixture it can be used with EndGlow cable for outdoor applications.


The FP-CE4 is ideally used for Raw fibre; PAF60, PAF80, PAF120



End Fittings

Ceiling

FP-CE5

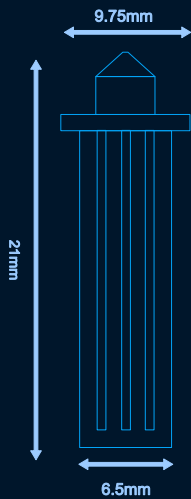

Our polycarbonate fitting range offers a simplistic way to focus and intensify end points of fibre.

Ideal for internal signage, ceiling effects and complimenting star field ceilings.

This specific fixture comes with a conical top in order to focus the light into a specific point.

Although preferably and indoor fixture it can be used with EndGlow cable for outdoor applications.


The FP-CE5 is ideally used for Raw fibre; PAF60, PAF80, PAF120



End Fittings

Ceiling

FP-CE6

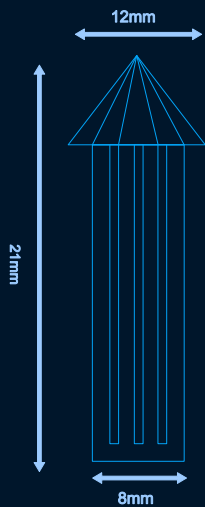

Our polycarbonate fitting range offers a simplistic way to focus and intensify end points of fibre.

Ideal for internal signage, ceiling effects and complimenting star field ceilings.

This specific fixture comes with a star top in order to distribute the light around the sparkling end point

Although preferably and indoor fixture it can be used with EndGlow cable for outdoor applications.


The FP-CE6 is ideally used for Raw fibre; PAF60, PAF80, PAF120



End Fittings

Ceiling

FP-CE7

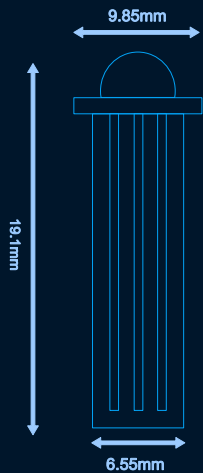

Our polycarbonate fitting range offers a simplistic way to focus and intensify end points of fibre.

Ideal for internal signage, ceiling effects and complimenting star field ceilings.

This specific fixture comes with a domed top in order to focus the light to glow around the surface.

Although preferably and indoor fixture it can be used with EndGlow cable for outdoor applications.

The FP-CE7 is ideally used for Raw fibre; PAF60, PAF80, PAF120



End Fittings

Ceiling

FP-CE8


A miniature lens made from polycarbonate.

Ideal for high up star field ceilings, walls looking for a flush fitting and decking - given, there's a countersunk hole.

This specific fixture's main purpose is to hold the fibre in place and produce a flush finish in whatever material, wall, ceilings it's incorporated.

If using for outdoor application a 1mm jacketed fibre can be used.

The FP-CE8 is ideally used for Raw fibre; PAF20, PAF30, PAF40

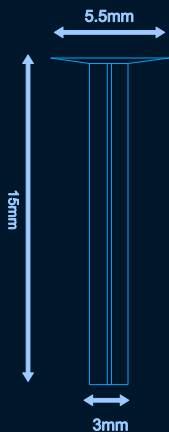

End Fittings

Decorative


FP-Pearl

Our Pearl lens fittings is a superb addition for decorative pieces.

These have been specially designed to dilute the light around the fixture to create an immersive glow.

These have an ever-evolving application, but suitably used in chandeliers, events, art work and sculptures.

The FP-Pearl is ideally used for Raw Fibre; PAF30, PAF40, PAF60 and can be custom made to fit smaller fibre sizes.

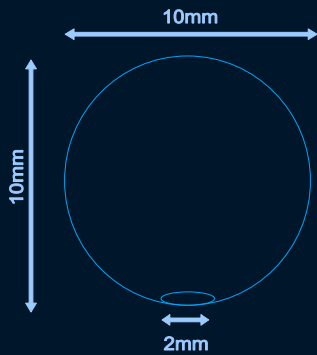

End Fittings

Decorative

FP-Eye


Our FP-Eye fitting offers a magnified dome lens to intensify the light output to create something truly remarkable.

This brass fitting is a fantastic way to add more depth to large sized fibre.

This fixture is for indoor application.

This unique fitting can incorporate both Raw and EndGlow fibre but the latter will give a stronger light output.

The FP-Eye is ideally used for EndGlow fibre; EG8.0, EG12.0, EG25.0 and EG50.0

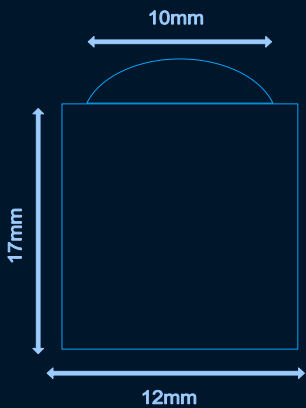

End Fittings

Decorative


FP-Sphere 1

Our Sphere range offers the ability to create outstanding landscape lighting.

Equipped with aluminum poles and spikes these can be placed in a variety of outdoor terrains to create remarkable compositions.

The FP-Sphere 1 offers a transparent shell, which can be used to include bundled/wound fibre inside the fitting.

The FP-Sphere 1 is ideally used for EndGlow fibre; EG8.0, EG12.0, EG25.0, EG50.0

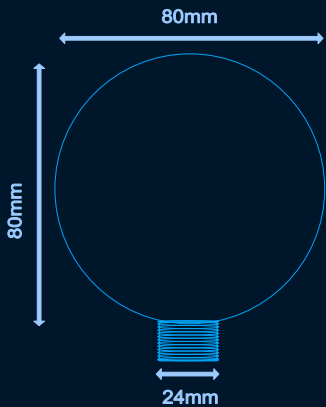

End Fittings

Decorative


FP-Sphere 2

Our Sphere range offers the ability to create outstanding landscape lighting.

Equipped with aluminum poles and spikes these can be placed in a variety of outdoor terrains to create remarkable compositions.

The FP-Sphere 1 offers a translucent shell, which can be used to create a glowing effect.

The FP-Sphere 2 is ideally used for EndGlow fibre; EG4.0, EG8.0, EG12.0

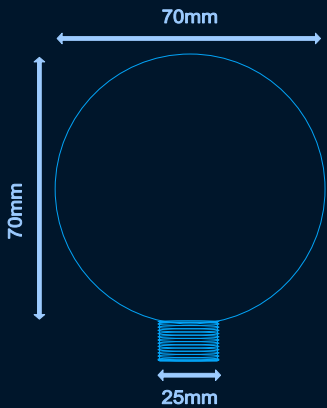

End Fittings Decorative


FP-Reed 1

Our Reed range offers the ability to create outstanding landscape lighting.

Equipped with aluminum poles and spikes these can be placed in a variety of outdoor terrains to create remarkable compositions.

The FP-Reed 1 offers a transparent tube, incorporating a bubble-like effect which are each individually magnified.

The FP-Reed 1 is ideally used for EndGlow fibre; EG8.0, EG12.0, EG25.0, EG50.0

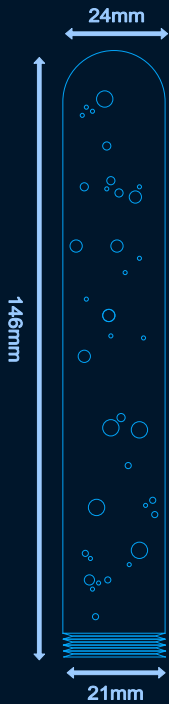

End Fittings Decorative


FP-Reed 2

Our Reed range offers the ability to create outstanding landscape lighting.

Equipped with aluminum poles and spikes these can be placed in a variety of outdoor terrains to create remarkable compositions.

The FP-Reed 2 offers a translucent tube, which evenly distributes the light across the entire fitting to convey a glowing effect.

The FP-Reed 2 is ideally used for EndGlow fibre; EG8.0, EG12.0, EG25.0, EG50.0

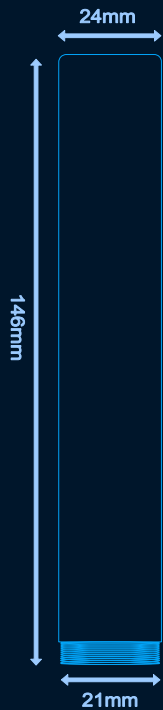



4

Accessories

Accessories

DMX XLR

The XLR adapter allows users to daisy-chain using standard 3-pin XLR data cables.

The XLR Adapter converts a single RJ45 output, which connects to our Light source to dual XLR ports for DMX in and DMX out.

- Minimal data interference
- Dual XLR connectors
- RJ-45 piggyback cable included
- Robust aluminum housing



Accessories

Fibre Optic Harness

The End-cap Fiber Adapters fit into each end-cap of all our Light sources.

Five sizes of compression fittings are available to fit a range of fiber diameters from 6mm to 30mm.

Material/Finish: Black anodized/Metal
Aluminum and plastic



Accessories

P-Clips & Tracking

Our 'P' Clips are clear PVC for mounting fibre optic cable where a tight radius is required for free form designs or when track is inappropriate.

Clear caps for termination of dead end runs of SideGlow cable.

Our fibre optic cable mounting U-channel is a white, rigid plastic used to mount fibre optic cable for front-only viewing. It is easily cut or notched for bending and can accommodate a slight radius. It is available in 6-foot sections and can be cut to length. Covers are clear.



www.fibrepros.co

info@fibrepros.co

UK & UAE

© 2022 FibrePros. All Rights Reserved.



FibrePros

Thank You

