

# WALL MOUNT (WM01)




## Applications:

Perfect for security, entry ways, stairways, storage and perimeter areas, as well as residential exteriors.

## Features

- Sealed die-casting profile for outdoor applications
- Consumes 17W&15W to replace 120W Incandescent, 25W to replace 50W HID
- Lumen output from 1700-2700lm
- Polycarbonate optical lens with UV stabilizers for choosing
- Optional for 120V-277V photocell
- Lifespan: Estimated >50,000 Hours
- UL/cUL wet location listed

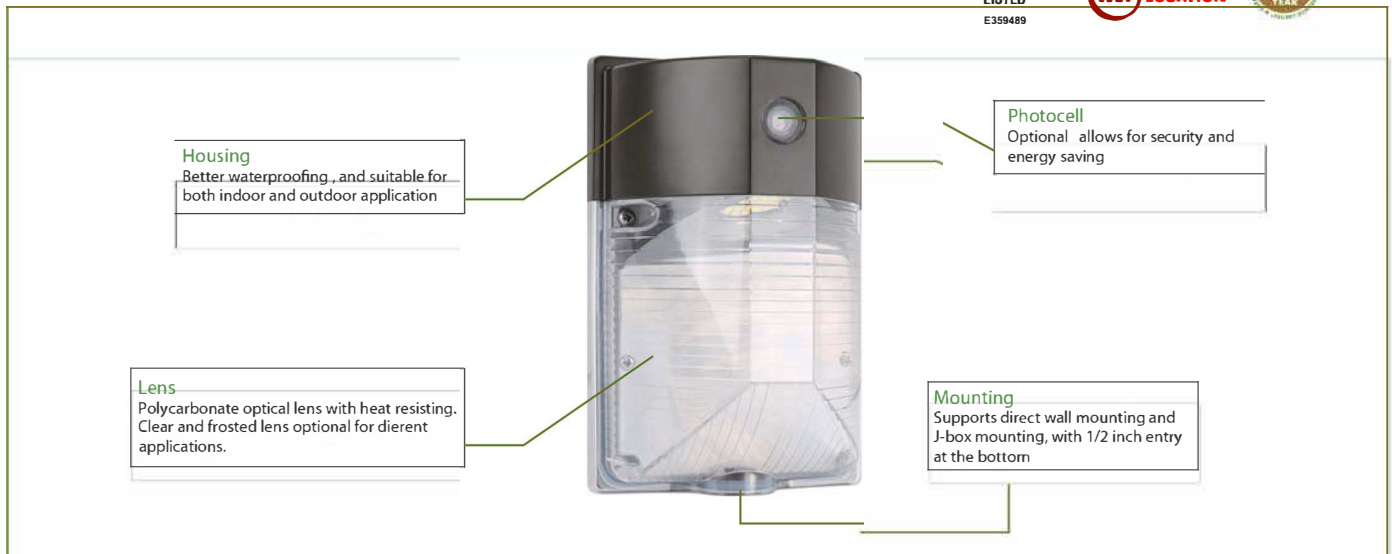

# PERFORMANCE DATA


SYSTEM WATTS	VOLTAGE	LENS	4000K(70CRI)		5000K(70CRI)	
			LUMENS	LPW	LUMENS	LPW
15W	120-277VAC	Clear Lens	1700lm	113 lm/W	1750lm	117 lm/W
		Frosted Lens	1800lm	120 lm/W	1820lm	121 lm/W
17W	120-277VAC	Clear Lens	1900lm	112 lm/W	1950lm	115 lm/W
		Frosted Lens	2000lm	118 lm/W	2000lm	118 lm/W
25W	120-277VAC	Clear Lens	2550lm	102 lm/W	2600lm	104 lm/W
		Frosted Lens	2600lm	104 lm/W	2700lm	108 lm/W

# ELECTRICAL DATA


Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	250	15	120	0.13
		15	208	0.07
		15	240	0.06
		15	277	0.05
1	250	17	120	0.14
		17	208	0.08
		17	240	0.07
		17	277	0.06
1	430	25	120	0.21
		25	208	0.12
		25	240	0.10
		25	277	0.09

# DIMENSION

unit: inch/mm

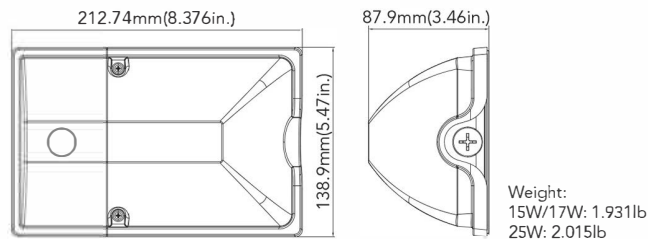

# PHOTOMETRICS

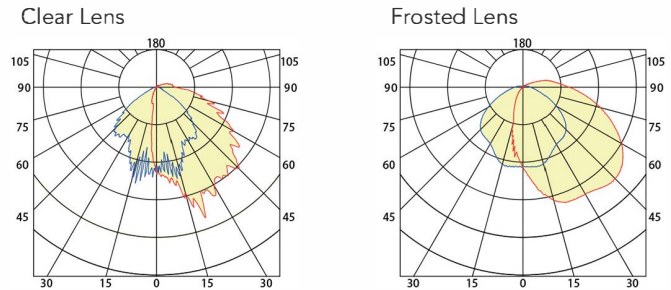

# ORDERING GUIDE

Fixture Type	Wattage	Voltage	CCT	Finish	Photoce (Option)	Lens
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>WM01</b>	<b>15</b> 15W <b>17</b> 17W <b>25</b> 25W	<b>27V</b> 120-277V	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K	<b>D</b> Dark Bronze <b>B</b> Black <b>W</b> White	<b>P0</b> 120-277V Photocell <b>Blank</b> Without Photocell	<b>F</b> Frosted Lens <b>Blank</b> Clear Lens

