




## Features

- Available with 2ft and 4ft as per applications.
- Truly UL 94 Flame Rating - 5VA rating on housing.
- PIR Sensor optional and supports Emergency Battery.
- Optional DR frost low profile lens distribution or parking garage as per applications.
- Standard 1-10V dimming available, Projected life span of 50,000 hrs.
- Operating temperature is -40°C to 45°C (-40°F to 113°F)
- UL/cUL wet location listed and DLC qualified.
- Assembled in America guarantees high quality.

Size: 2'



Size: 4'

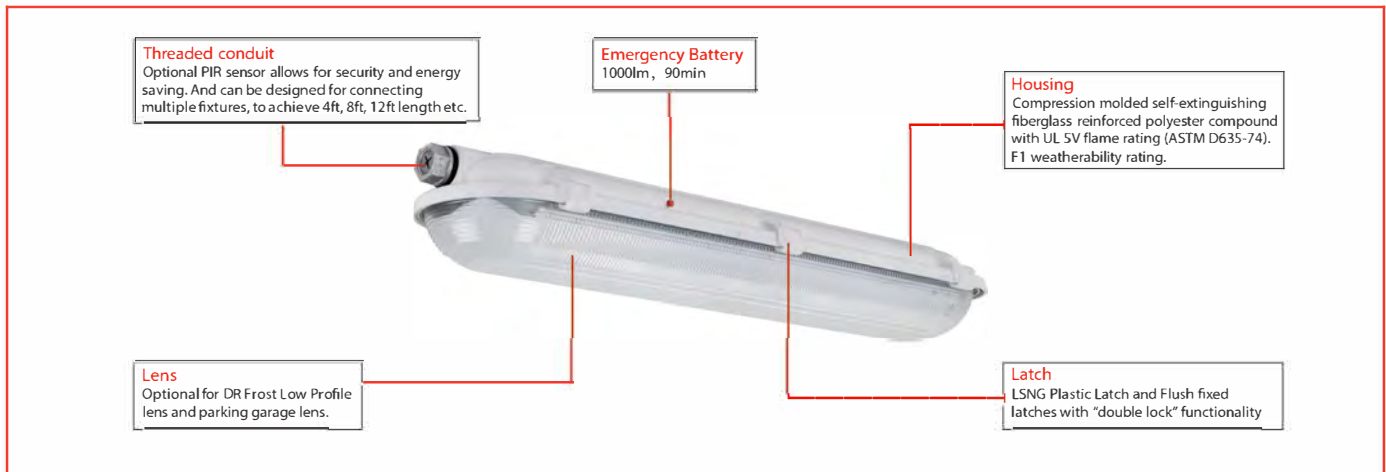



# PERFORMANCE DATA

SYSTEM WATTS	SIZE	VOLTAGE	LENS	3000K(80CRI)		4000K(80CRI)		5000K(80CRI)	
				LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
30W	2 FT	120-277VAC	Parking Garage Lens	3100lm	103 lm/W	3400lm	113 lm/W	3430lm	114 lm/W
			DR Frost Low Profile Lens	3200lm	106 lm/W	3400lm	113 lm/W	3430lm	114 lm/W
40W	2 FT	120-277VAC	Parking Garage Lens	4000lm	100 lm/W	4300lm	108 lm/W	4350lm	109 lm/W
			DR Frost Low Profile Lens	4100lm	102 lm/W	4300lm	108 lm/W	4350lm	109 lm/W
45W	4 FT	120-277VAC	Parking Garage Lens	4700lm	104 lm/W	4900lm	109 lm/W	4950lm	110 lm/W
			DR Frost Low Profile Lens	4800lm	106 lm/W	4900lm	109 lm/W	4950lm	110 lm/W
60W	4 FT	120-277VAC	Parking Garage Lens	6000lm	100 lm/W	6300lm	105 lm/W	6350lm	106 lm/W
			DR Frost Low Profile Lens	6100lm	101 lm/W	6400lm	107 lm/W	6450lm	108 lm/W

# ELECTRICAL DATA

Size	Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
2 FT	1	730	30	120	0.25
			30	208	0.14
			30	240	0.13
			30	277	0.11
2 FT	1	980	40	120	0.33
			40	208	0.19
			40	240	0.17
			40	277	0.14
4 FT	1	1100	45	120	0.38
			45	208	0.22
			45	240	0.19
			45	277	0.16
4 FT	1	1500	60	120	0.50
			60	208	0.29
			60	240	0.25
			60	277	0.22


# MOUNTING OPTION
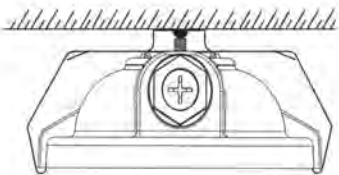
<ul style="list-style-type: none"> <li>• Surface mount</li> </ul> 	<ul style="list-style-type: none"> <li>• V Hooks</li> </ul> 
---	---

# DIMENSION

unit: inch/mm



Parking garage

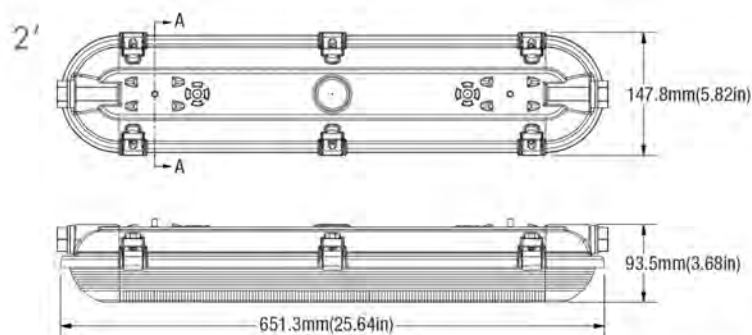

Weight: 4.943lb

Parking garage

4'


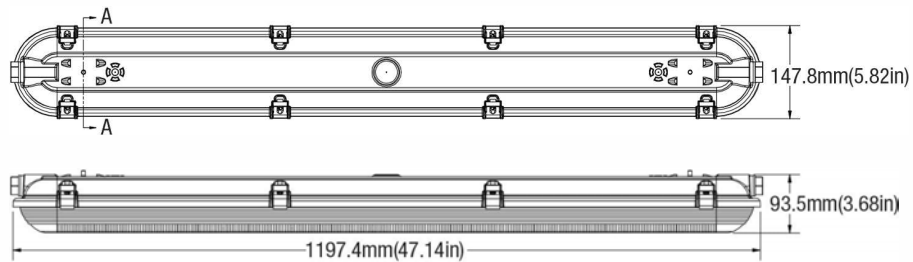


Section A-A

Weight: 9.087lb

DR Frost Low Profile Lens

2'


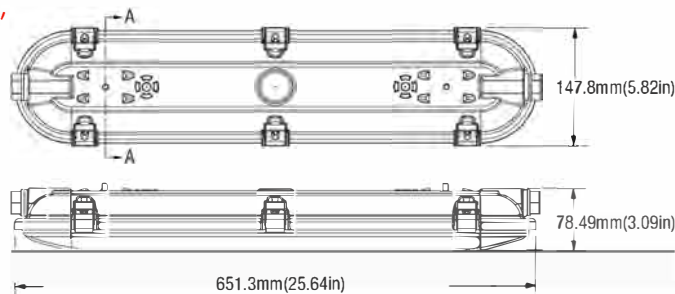


Section A-A

Weight: 4.345lb

DR Frost Low Profile Lens

4'

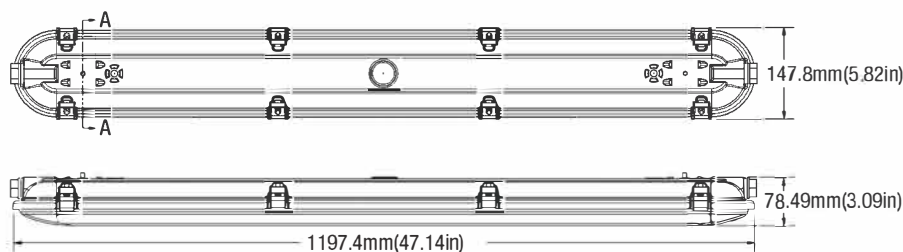


Section A-A

Weight: 7.753lb


## CHOOSE YOUR OPTICAL DISTRIBUTION

Each optic is designed for a specific purpose. The low bay distribution allows a wash of light in any application. In addition, we design an optic specially for parking garage.

Low Bay



Parking Garage

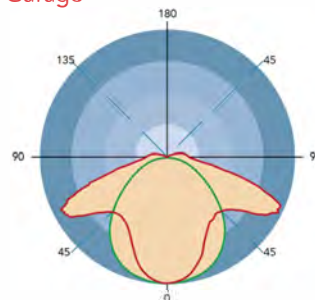

## ORDERING GUIDE

Fixture Type	Wattage	Voltage	CCT	Sensor (Option)	Backup Battery (Option)	Photometry
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>VT02</b>	<b>30</b> 30W <b>40</b> 40W <b>45</b> 45W <b>60</b> 60W	<b>27V</b> 120-277V	<b>40K</b> 4000K <b>50K</b> 5000K	<b>Blank</b> Without Sensor <b>M</b> With Sensor	<b>B</b> Emergency Battery <b>Blank</b> Without Emergency Battery	<b>LB</b> Low Bay Distribution <b>PG</b> Parking Garage