

The Luxe Series enhances the popular flush glazing system by increasing its thermal performance. By utilizing an advanced glass-reinforced nylon thermal break, the Luxe Series raises our traditional flush glazing to a new standard. Its simplicity as a stick-build system is easy to assemble and install, allowing for increase job site efficiencies.

KEY FEATURES

- Accommodates 1", $\frac{1}{2}$ " & $\frac{1}{4}$ " glass infill
- $4\frac{1}{2}$ " system depth
- Dry glazing
- Available in anodized and painted finishes

PERFORMANCE

- NAFS: Class CW-PG60
- A440- A3, C5, B7
- I-62 Double glaze
- STC Range: 35 42





LUXE DOUBLE PANE SERIES TABLE OF CONTENTS


Luxe Series Typical Details	003
Luxe Double Pane Series Image References	007




TYPICAL DETAILS WITH STANDARD COMMERCIAL DOOR








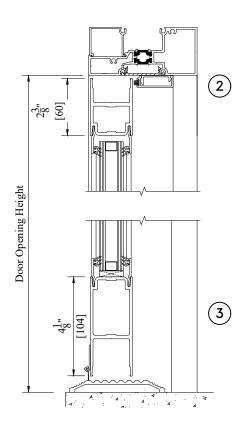






FOW - FEDERAL OFFICE WALL


TYPICAL DETAILS WITH STANDARD COMMERCIAL DOOR

















FOW - FEDERAL OFFICE WALL

TYPICAL DETAILS















TYPICAL DETAILS











FOW - FEDERAL OFFICE WALL

IMAGE REFERENCES







