


## PAS 5

Designed for FTE and FFEH ceramic elements, our reflective, polished aluminium clad steel projectors are ideal for areas needing rapid, effective and economic positional heat.

The projectors can form a bank of infrared panels to heat a specified area within a large space or used to heat large or small areas completely. Fixed directly to a suitable framework depending on the process requirements, they can be adjusted and angled to give the most effective heat coverage. Particularly useful in cooler or poorly insulated areas.

### Technical specification

Material	0.75 mm Polished aluminium clad steel
Dimensions	1258 x 97 x 76 mm
Average weight	3,841 g
Maximum Wattage	3250 W
Maximum Volts	480 V
Maximum Amps	23A
Standards	CE

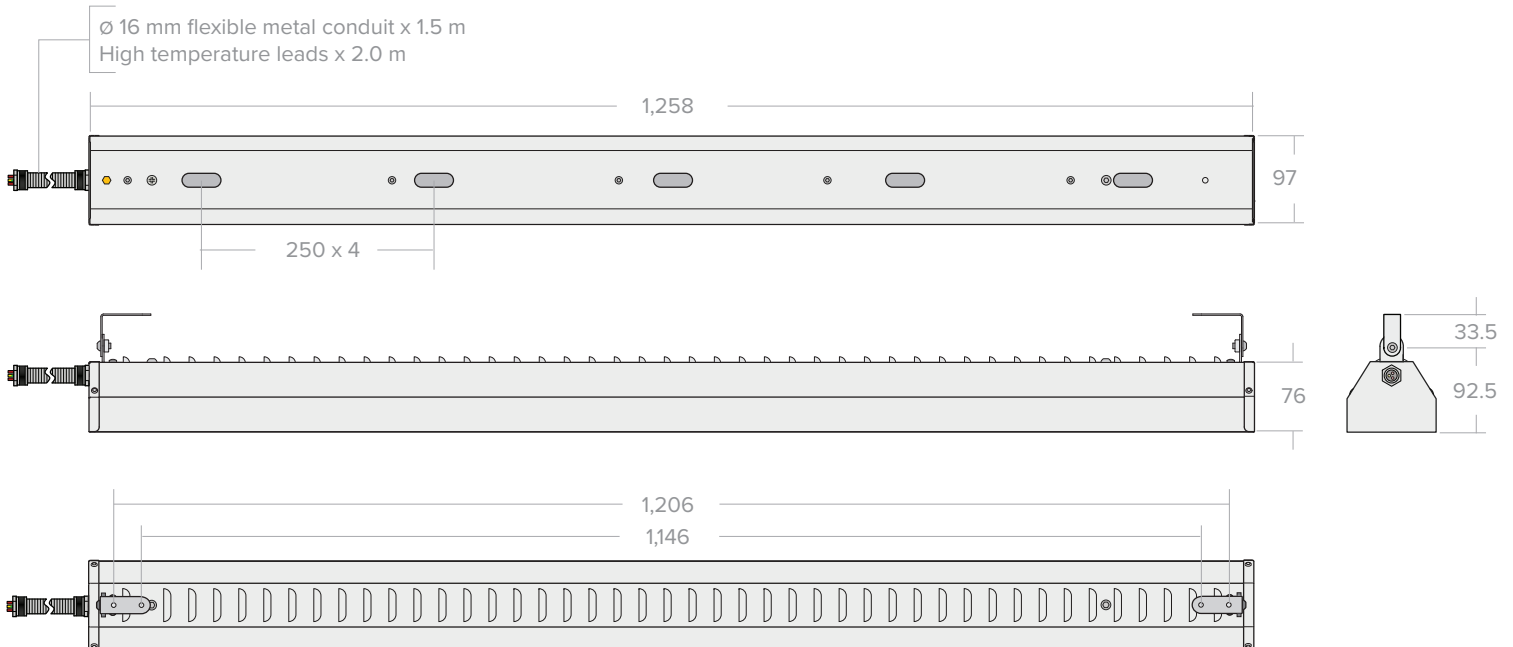

**PAS 5**  
PROJECTOR ALUMINIUM CLAD STEEL 5

Tolerances apply, all dimensions mm.



25W50