



RAS 4


Designed for FTE/FFEH ceramic emitters, this polished aluminium-clad steel reflector maximises radiant heat output. Units can be installed alone or side-by-side to form infrared heating panels.

The RAS provides efficient zone heating in large spaces or full-area coverage in both small and large environments. Built for durability and safety, the RAS has no moving parts, ensuring reliable, low-maintenance operation and a long service life.

Technical specification

Material	Aluminium Clad Steel Reflector
Dimensions	100 x 60 x 1004
Average weight	1222g
Maximum Wattage	4000W
Maximum Volts	480 V
Maximum Amps	18A
Standards	CE

300mm high temperature leads

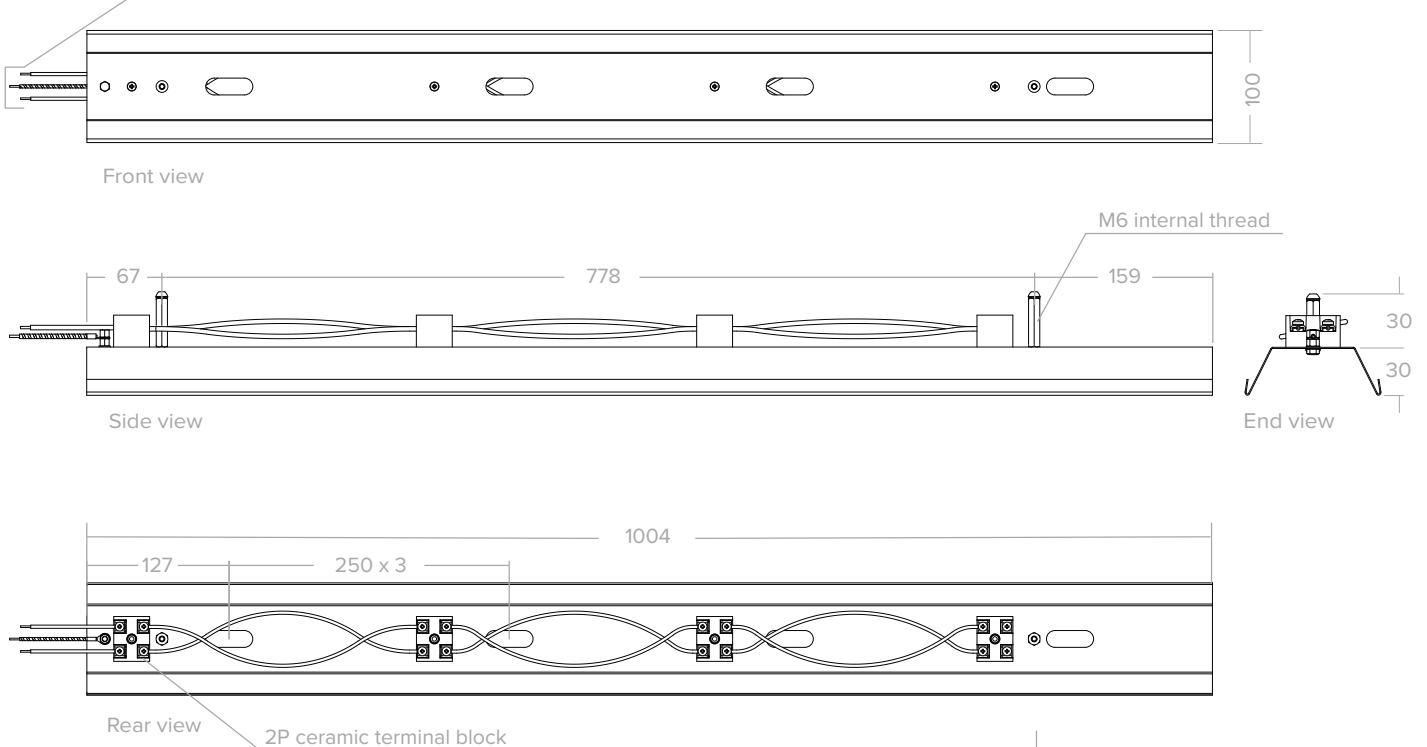

RAS 4 REFLECTOR ALUMINISED STEEL

Tolerances apply, all dimensions mm.
Reflector 0.75 mm polished aluminised steel

