




DESCRIZIONE DESCRIPTION

Un elemento base nella gamma dei downlight. Sorgente luminosa luminosa per evitare abbagliamento. Design funzionale e senza tempo

An elegant in the spotlight range. A high light source to reduce glare, a functional and timeless design.

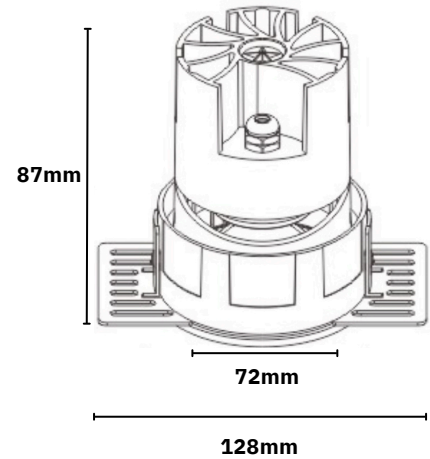

GENERAL

nero black bianco white
personalizzabile custom
Trimless recessed
IP20-IP44 (acces. FL055/FL060)
IK06

ELETRICO ELECTRICAL

10W
220-240VAC 50/60Hz
attrezzatura Compreso
gear included

ABBIGLIAMENTO ILLUMINAZIONE ILLUMINATION APPAREL

25° 43° 60°
IRC ≥ 90 CRI ≥ 90
IP20-44
(acces. FL055/FL060)
MacAdam ≤ 3
UGR < 19
difusor trasparente clear
diffuser

LE MISURE MEASURES

L87mm
D72mm

REGOLAMENTO DIMMING

on / off
IGBT/TRIAC
phase-cut
dimming IGBT/TRIAC
1-10V
push
DALI

RITAGLIARE CUTOUT




74mm
spessore del tetto: 13mm
min. ceiling thickness:
13mm massimo spessore
del tetto: 38mm max. ceiling
thickness: 38mm

ACCESSORI

ACCESSORIES

LUM040 honeycomb diffuser
LUM055 transparentglass

Relative spectral perception of brightness and melanopic effect

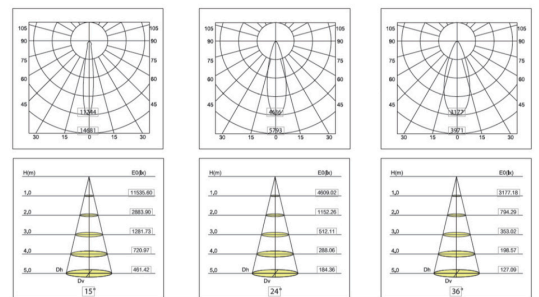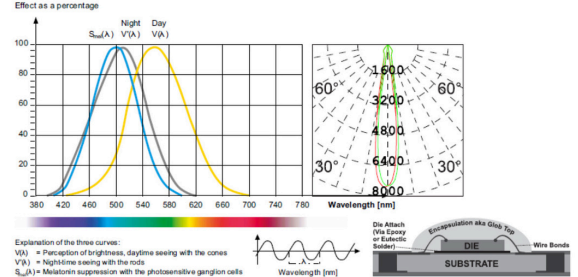

modificare senza preavviso change without notice