


LED PANEL LIGHT - 2x2

Features Designed to fit any ceiling surface. Built-in for squared/rectangular ceilings with 2" or less installation depth. Suspended and hanging for other types of ceilings. Environmentally friendly and recyclable. Easy low cost maintenance and repair. UL, CUL, certified to wet location, DCL Listed.


Applications Art galleries, museums, homes, schools, offices, hotels, restaurants, retail stores, and other commercial and industrial applications.



Panel 2x2 40W 4400Lm Spec

40W	rated power
↑ 75%	wattage saved
AC100~277V	input-voltage
>0.9	power factor
50/60Hz	frequency
4400Lm	lumens
4000K/5000K	color temperature
>80	CRI
THD: <20% (at 480V)	THD
120°	beam angle
damp location	IP rating
frosted	lens
aluminum alloy + PC shell	materials
external	power
50,000 hours	LED emitter life
yes	dimmable
5 years	warranty
23.7 x 23.7 x 1.9	size (in)
10.6 lbs	weight
-4°F to 122°F	working environment
>90%	power efficiency

product name	LC-BN24D-40
	LC-BN24D-50

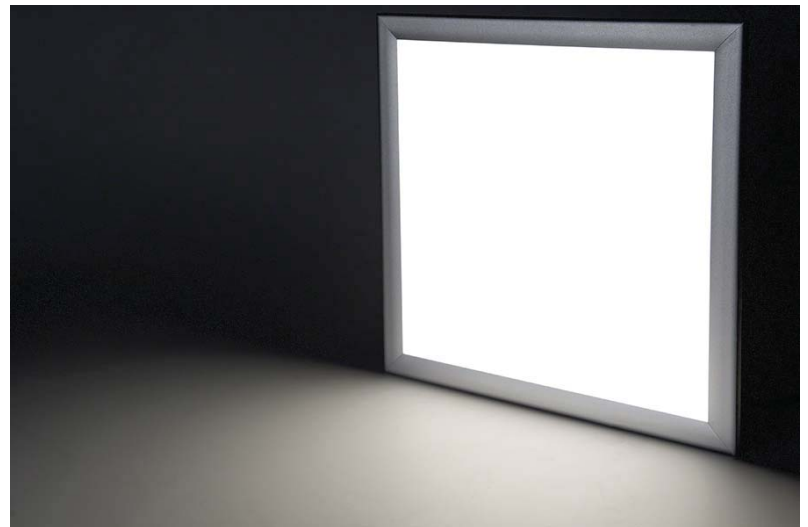

LEVANIER

Proudly made by Wide Loyal Development Ltd.
Los Angeles • Seattle • Vancouver
www.wideloyal.com

