



Pebble Lights

RGB+360Peb-12v / RGB+180Peb-12v

Lens: clear, frosted

Pitch: 4-, 6-, 12-inch, custom


View Angle: 360-, 180-degs.

Bulb Count: 5-, 10-, 25-light, custom

Wire Color: black, green, white, clear

Ends: thru-connect, terminated

Output	
LED Type	SMD5050
LED Channels	R-G-B
Greyscale	16-bit, 65,536 dimming levels*
LED Quantity	2
Control	
Individually Addressable	yes
Control Systems	NDB+ (ArtNet, E1.31), WEC+, MC+
Max Lights before power injection	approx. 125L
Max Distance before Power Injection	approx. 100-feet
Electrical & Safety	
Input Voltage	12 VDC
Current	0.028 Amps
Power	0.336 Watts
Wire	20 AWG, 3C, UV protected
Inline power injection	via Minleon Power T+'s & RGB+5A-12V
Certifications	(c)UL listed, IP 65, CE
Physical	
Diameter	1.75 x 0.625"
Weight	approx. 0.256 oz. per bulb
Housing	polycarbonate
Mounting bracket	yes, 2-screw hole adjustable clip, add-on
Connector Type	LLT twist-lock
Operating Temperature	Neg -20 to +50 Cel. / Neg -4 to +122 Far.

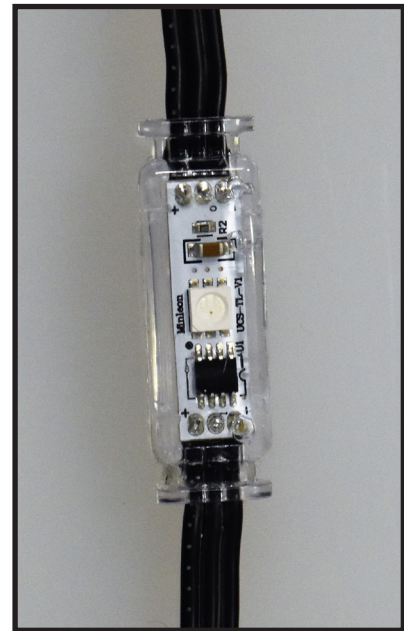

Distributed by:
Minleon USA
 5267 Simpson Ferry Road
 Mechanicsburg, PA
 (717) 763-1055
www.MinleonUSA.com



* 8-bit via DDP.

Specifications as of January 2020 and are subject to change.

