


# Wall-Wash Fixture

## RGB+WWF-24Vdc

| Output                              |   |
|-------------------------------------|---|
| LED Type                            | COB20WRGB                                 |
| LED Channels                        | R-G-B                                     |
| LED Count                           | 1   |
| Greyscale                           | 16-bit, 65,536 dimming levels*            |
| Beam Angle                          | 180-degrees                               |
| Control                             |   |
| Individually Addressable            | yes                                       |
| Control Systems                     | NDB+ (ArtNet, E1.31), WEC+, MC+           |
| Max Lamps before power injection    | 3 - 4                                     |
| Max Distance before Power Injection | 30-feet to be verified                    |
| Electrical & Safety                 |   |
| Input Voltage                       | 24 VDC                                    |
| Current                             | 0.83 Amps / lamp                          |
| Power                               | 20 Watts / lamp                           |
| Wire                                | 18 AWG, 3C, UV protected                  |
| Inline power injection              | via Rainmin Power T+'s                    |
| Certifications                      | IP 65                                     |
| Physical                            |   |
| Housing                             | aluminum, powder coated base; glass cover |
| Size                                | ~ 8" x 6" x 1.5"                          |
| Weight (kg)                         | ~3 lbs.                                   |
| Connector Type                      | LLT twist-lock                            |
| Mounting Option                     | 180-degree adjustable yoke                |
| Lead/End Wire length                | 6" (standard)                             |
| Operating Temperature               | Neg -25 to +55 Cel. / -13 to 130 Far.     |

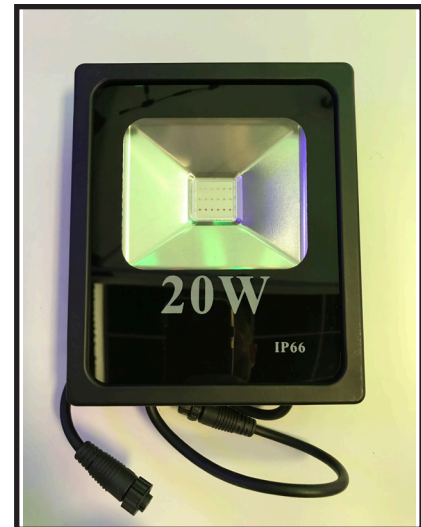

Distributed by:  
**Minleon USA**  
 5267 Simpson Ferry Road  
 Mechanicsburg, PA  
 (717) 763-1055  
[www.MinleonUSA.com](http://www.MinleonUSA.com)

\* 8-bit via DDP.

Specifications as of March 2020 and are subject to change.

