



# Pebbles - 4 LED

## RGBW+PEB360-4-24v

Lens: clear, frosted

Pitch: 4-, 6-, 12-inch, custom


View Angle: 360-, 180-degs.

Bulb Count: 5-, 10-, 25-light, custom

Wire Color: black, green, white, clear

Ends: thru-connect, terminated

Output	
LED Type	SMD5050
LED Channels	R-G-B-W
Greyscale	16-bit, 65,536 dimming levels*
LED Quantity	4 / pixel
Viewing Angle	360-degrees (or 180-deg., option)
Control	
Individually Addressable	yes
Control Systems	NDB+ (ArtNet, E1.31), WEC+, MC+
Max Lights before power injection	approx. 160L
Max Distance before Power Injection	approx. 160-feet
Electrical & Safety	
Input Voltage	24 VDC
Current	0.022 Amps
Power	0.53 Watts
Wire	18 AWG, 3C, UV protected
Inline power injection	via Minleon Power T's & 3A or 4A-24v psu
Certifications	(c)UL listed, IP 65, CE
Physical	
Size	2.0 x 0.875 x 0.5"
Weight	approx. 0.256 oz. per bulb
Housing	polycarbonate
Mounting bracket	yes, 2-screw hole adjustable clip, add-on
Connector Type	LLT twist-lock
Operating Temperature	Neg -20 to +50 Cel. / Neg -4 to +122 Far.

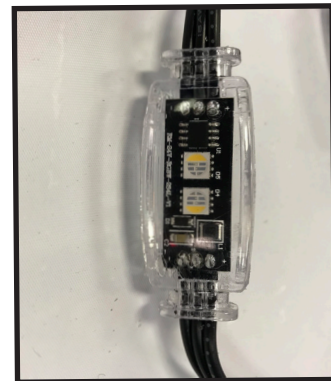

Distributed by:  
**Minleon USA**  
 5267 Simpson Ferry Road  
 Mechanicsburg, PA  
 (717) 763-1055  
[www.MinleonUSA.com](http://www.MinleonUSA.com)

\* 8-bit via DDP.

Specifications as of March 2020 and are subject to change.

