

APT. 18 C

APT. 18

A -

B -

C -

WHEN BREAKER TRIPS, HANDLE WILL MOVE TO "OFF" POSITION

TO RESTORE SERVICE, MOVE HANDLE TO "ON" POSITION

FPE FEDERAL PACIFIC

AMPS 200 VOLT 240V AC MAX

100V 15A 125V 15A 250V 15A

100V 15A 125V 15A 250V 15A

D -

E -

F -

WHEN BREAKER TRIPS, HANDLE WILL MOVE TO "OFF" POSITION

TO RESTORE SERVICE, MOVE HANDLE TO "ON" POSITION


FPE FEDERAL PACIFIC

AMPS 200 VOLT 240V AC MAX

100V 15A 125V 15A 250V 15A

100V 15A 125V 15A 250V 15A

EXISTING

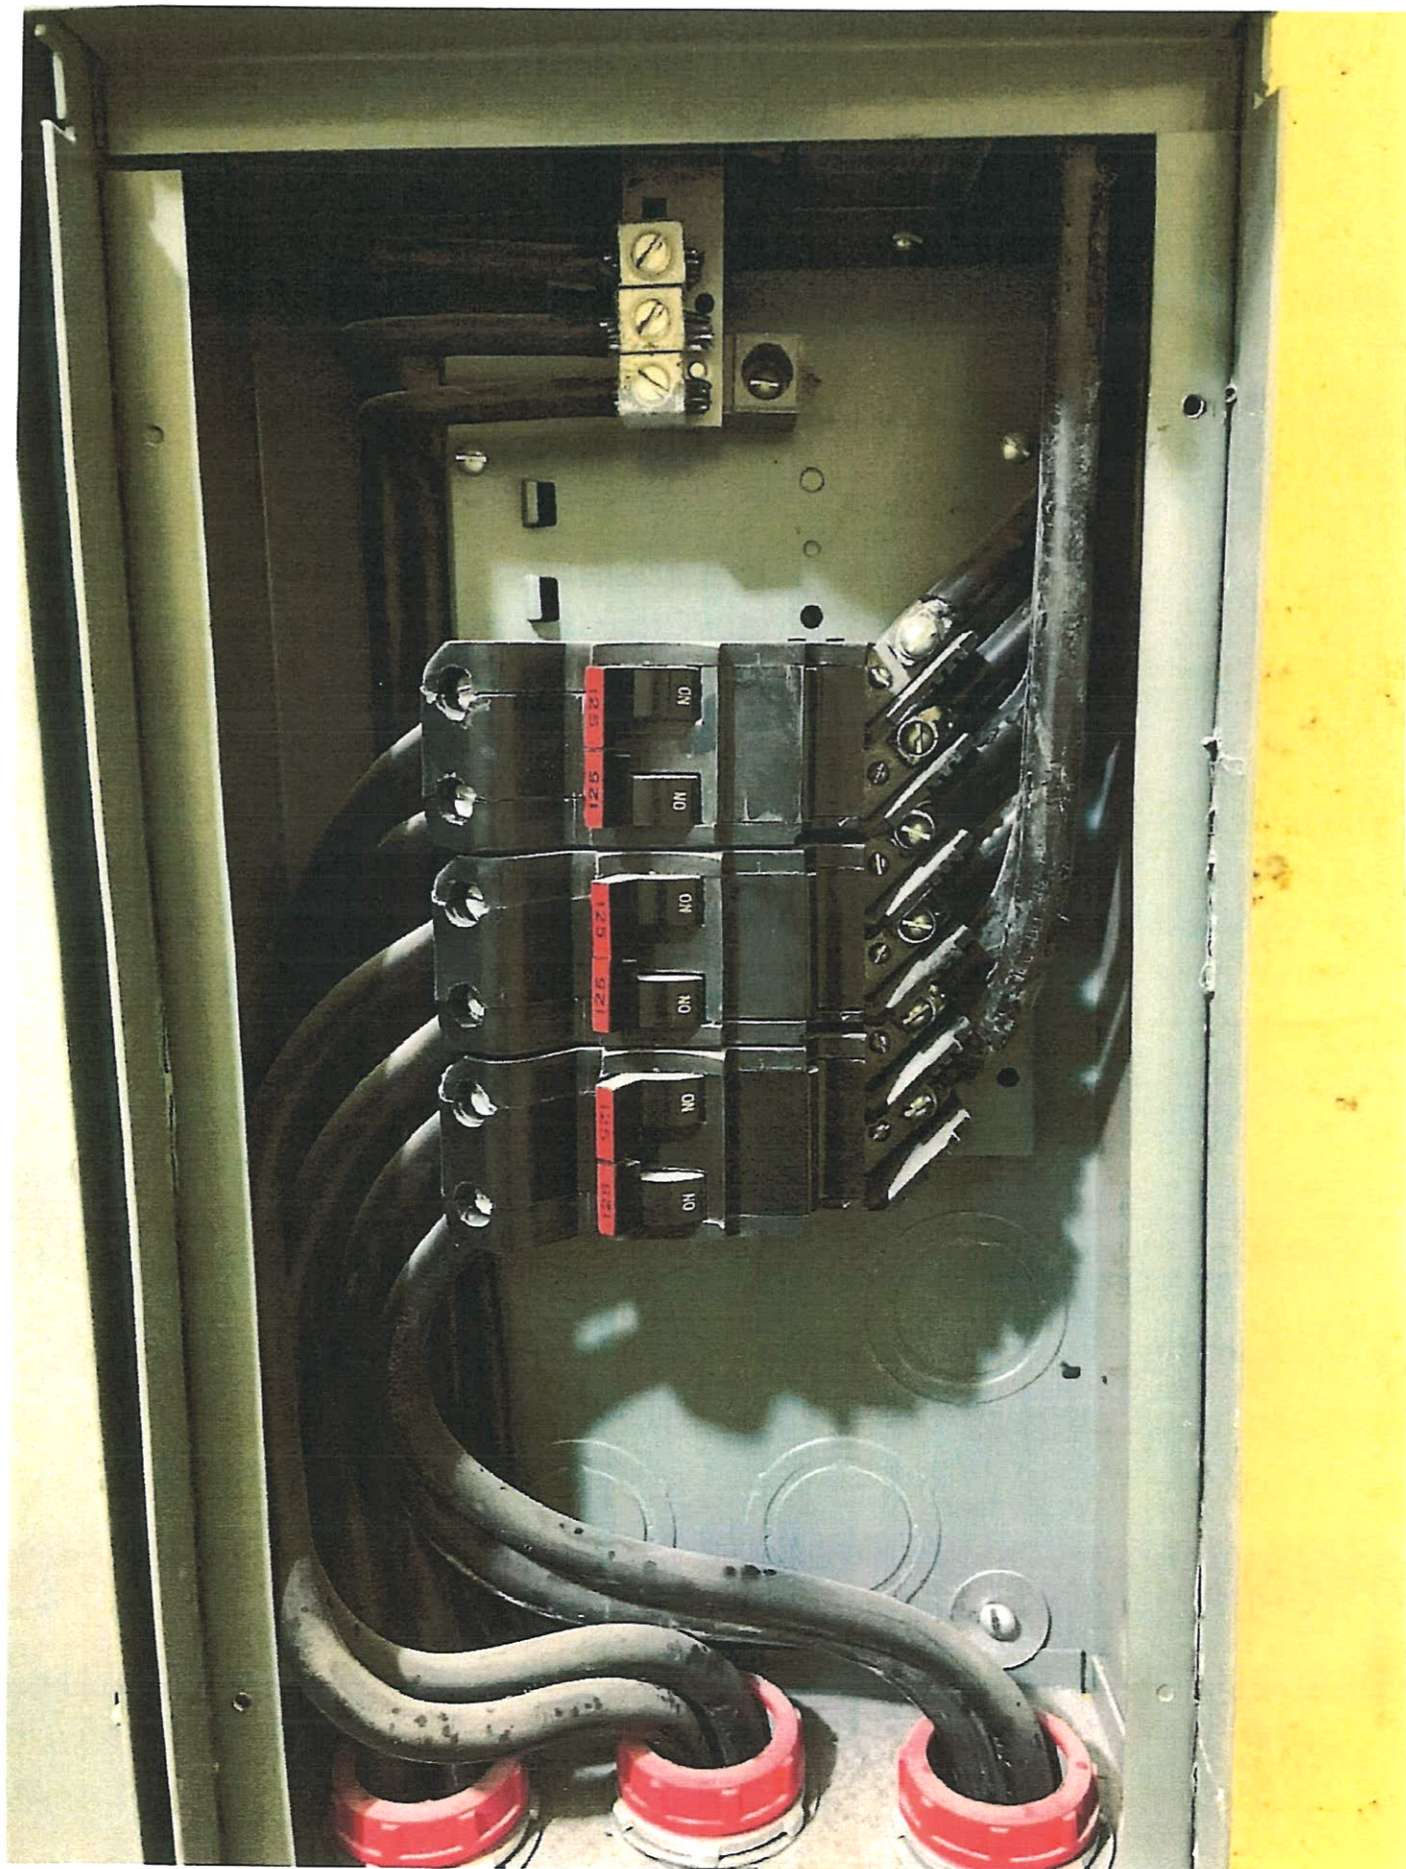

EXISTING



RETRO FIT TO SIEMENS

APT. 18 C

APT. 18 F

18 A

18 B

18 C

18 D

18 E

18 F

FPE Catalog No. F3M33-4B INDOOR

RETRO-FITTED BY **RetrofitPanel**
NEW BREAKER REPLACEMENT
SIEMENS TYPE SL 125 AMP MAX

FPE Catalog No. F3M33-4B INDOOR

RETRO-FITTED BY **RetrofitPanel**
NEW BREAKER REPLACEMENT
SIEMENS TYPE SL 125 AMP MAX

RETROFIT

C

3C

FPE Catalog NO.

FSMS3-6B

INDOOR

1 PH 3 WIRE 120/240 V.A.C.
3 PH 4 WIRE 120/208 V.A.C.

Meter and Circuit Breakers
Rated at 125 Amp Max

Max number of breaker poles 6

USE COPPER OR ALUMINUM WIRE
CIRCUIT BREAKERS ARE SUITABLE FOR USE WITH
ALUMINUM WIRE WHEN SO MARKED

FPE UL CLASS - CTL ENCLOSED PANELBOARD
No. AN- 111199

RETRO-FITTED BY:



RetrofitPanel
By Paramount Sourcing Group

NEW BREAKER REPLACEMENT
SIEMENS TYPE BL 125 AMP MAX

59 CENTRAL AVE. SUITE 8 FARMINGDALE, NY 11735 SALES@RETROFITPANEL.COM

MODEL NUMBER: FSMS
SERIAL NUMBER: 3A
VOLTAGE: 120
HERTZ: 60
AMPERAGE: 125
PHASE: 1
SCCR: -



QPS - FIELD APPROVAL CERTIFICATION