



PHOENIX

HOME IMPROVEMENTS



+1 (407) 717 6686





www.phoeniximprovement.com



7906 Kingspointe Pkwy,
suite 103, Orlando, FL 32819

PRODUCT CATALOG

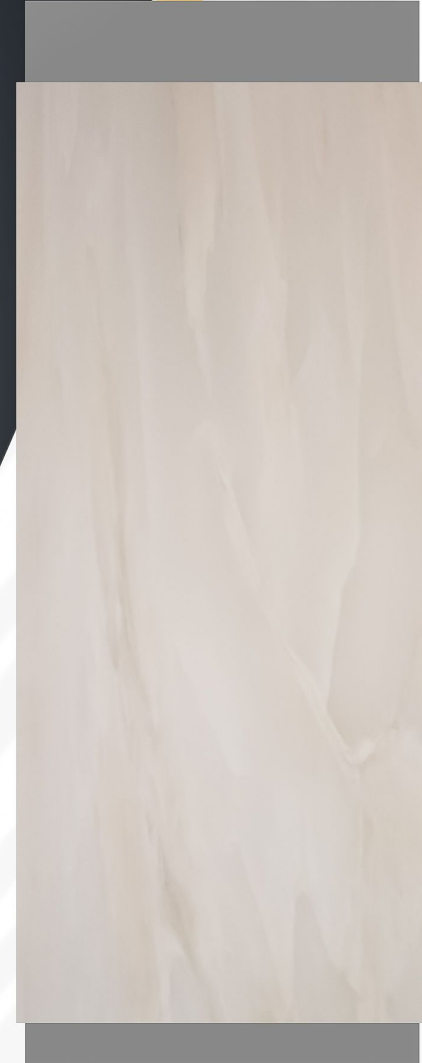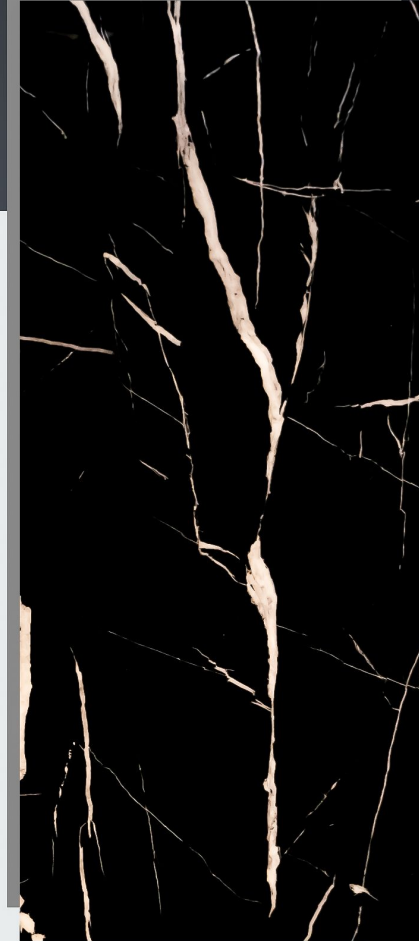



**MARBLE
PVC
SHINE
4'x10'**



DY2438



DY2432



DY2436



DY2435




**MARBLE
PVC
SHINE
4'x10'**




2041



2044

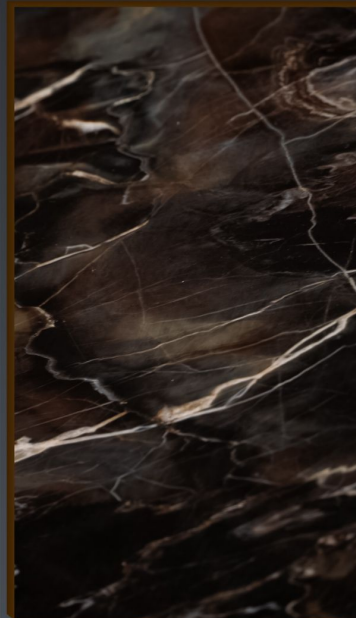


2100

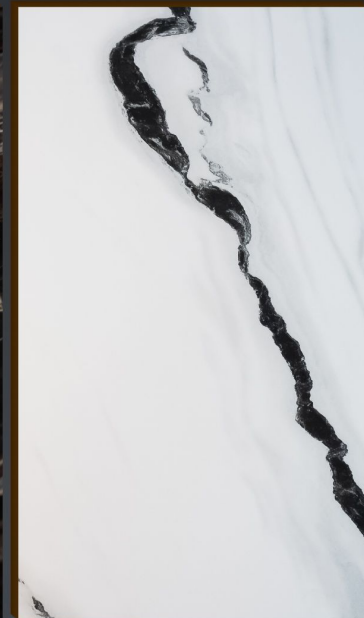

2101




3044

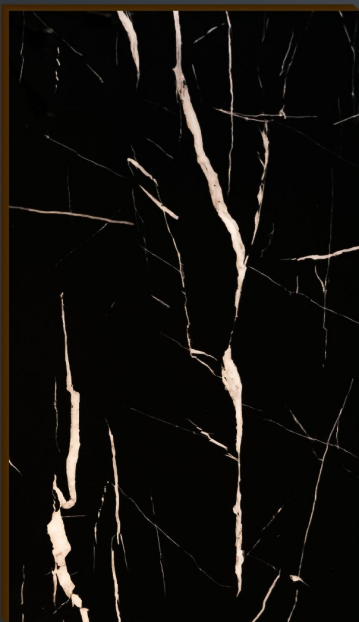


6001



6002

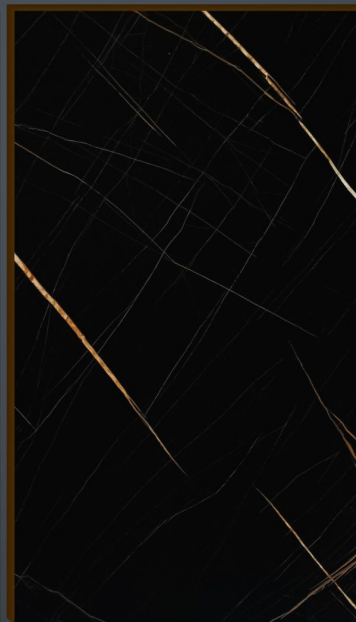

6029

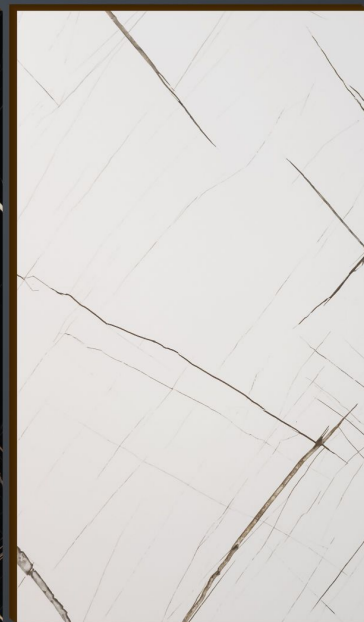


6030



MARBLE
PVC
SHINE
4'x10'




6031

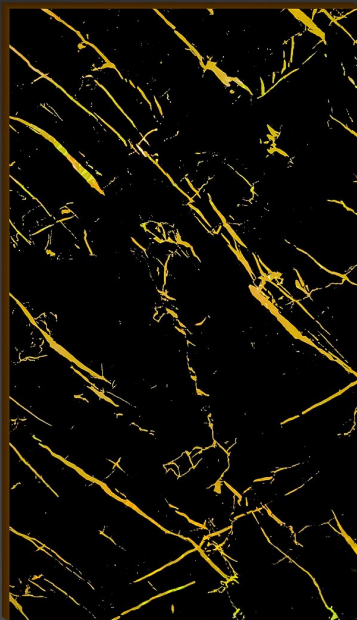

6101



8226

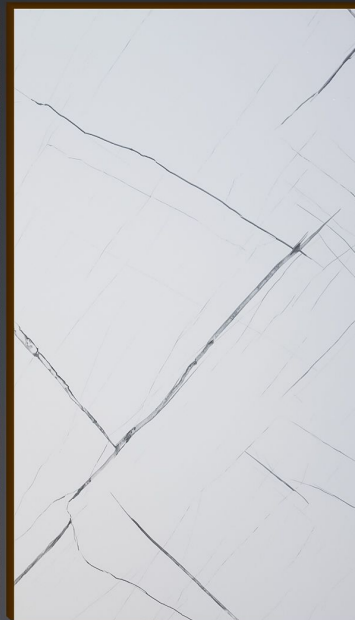

8231



6003




9002



9004



9010

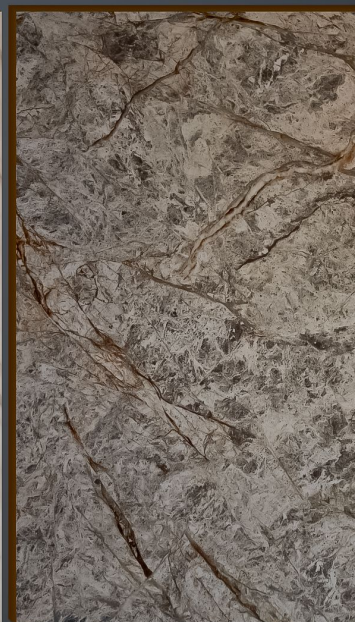

9303




**MARBLE
PVC**


SHINE 4'X8'



2100

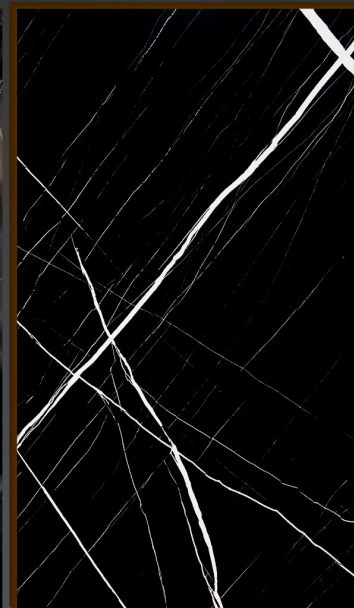


3011

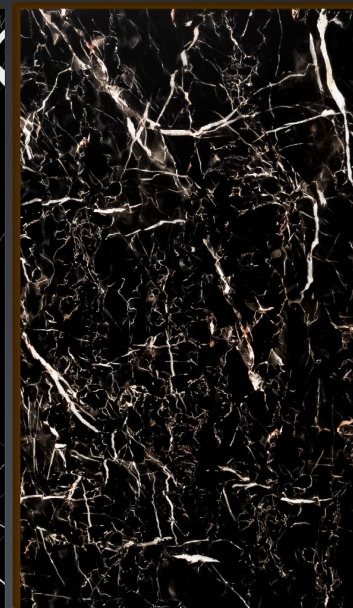

9015

ALUMINIUM 4'X10'

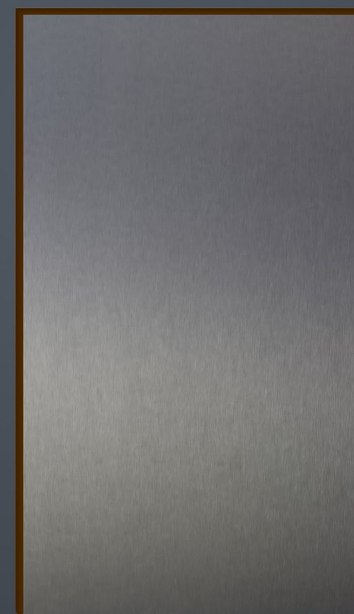

GRAY STREAK



SILVER STREAK



**MARBLE
PVC
MATT
4'x10'**



CARAMEL



EBONY



**FOAM CLASSIC
GRAY RJ**



**FOAM SHARPY
WALNUT**



FOAM CREAM C1



LIGHT GRAY



RUMMY OAK



TECHNIC WOOD



BAMBOO



FIBER
16"x10'



BUSS BIRCH



BEIGE



ROASTED BAMBOO



AMBER PINE



LIGHT APRICOT



COPPER WOOD



FABRIC GRAY



FIBER
16"x10'



CASHMERE



GRAY



WHITE



MAPLE



ESPRESSO




CLASSIC BIRCH




FLEXIBLE STONES



BEIGE 2'x4'

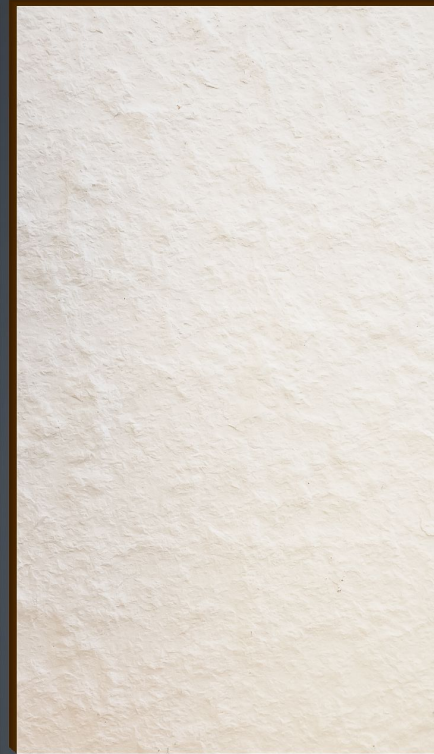

PURE WHITE 2'x4'

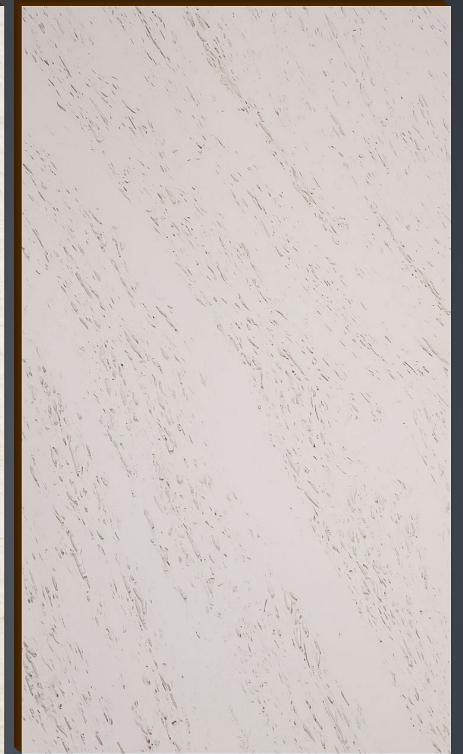

TRAVERTINE 4'x8'



**OUTDOOR
WALL
PANEL**



**WALNUT
FLOW LINE**



**CARBON
BLACK**



MAPLE




WALNUT



OUTDOOR WALL PANEL



MAPLE

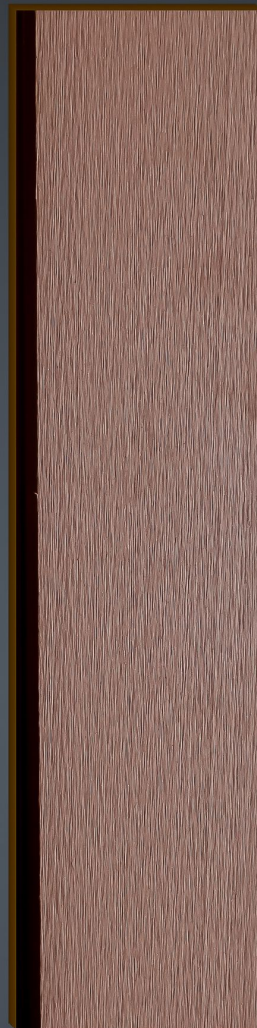

SANDALWOOD




CARBON
BLACK




**CURVED
SLATTED
PANEL
6"x12'**


CARAMEL

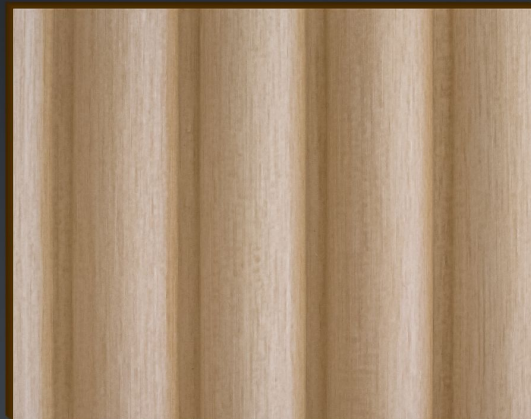

CREAM

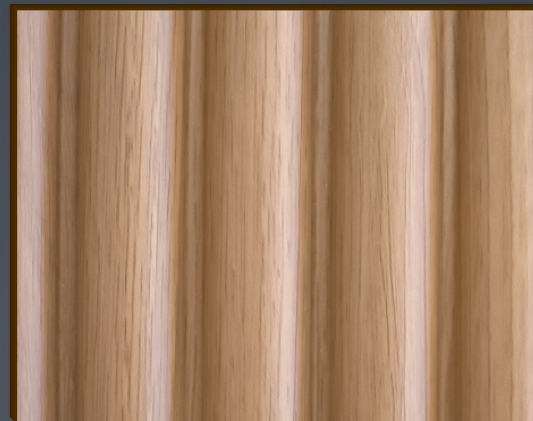

LIGHT GRAY

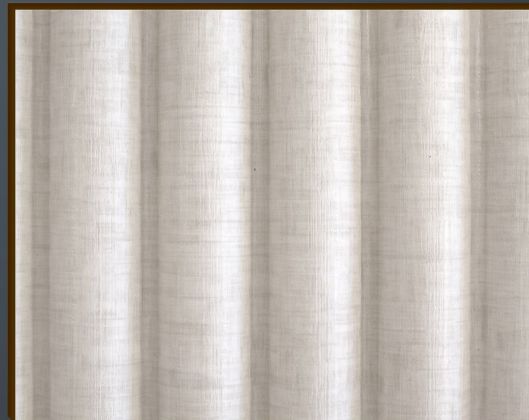



**WPC
FAUX
BEAM
4"X2"X12'**

**BEAM
CREAM**



BEAM EBONY




BEAM SHARPY WALLNUT






**SLAT
PANEL
8"x12'**

**LIGHT
GRAY**




**LIGHT
APRICOT**



RUMMY OAK



BAMBOO




TECHNIC WOOD




SHARPLY WALNUT



GRAY ROSE



EBONY





**SLAT
PANEL
6"x12'**

6-INCH THIN


GRAY ROSE




SHARPLY WALNUT




TECHNIC WOOD

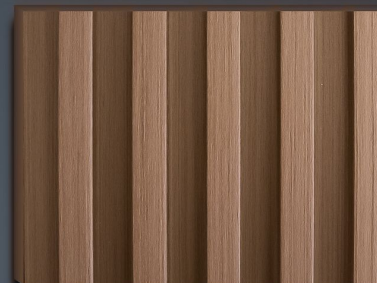

CLASSIC GRAY

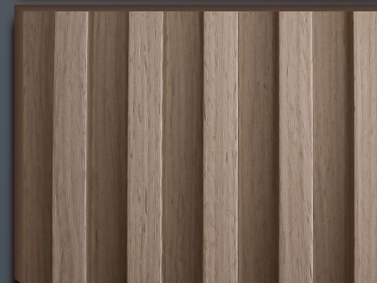


BRAZIL YELLOW

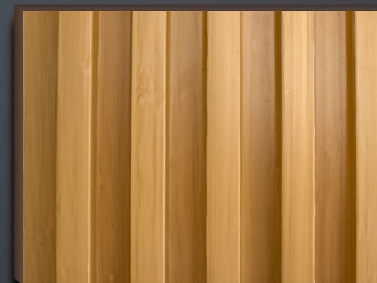



**SLAT
PANEL
6"x12'**

**BUSS
BIRCH**



BEIGE



ROASTED BAMBOO



AMBER PINE



LIGHT APRICOT



COPPER WOOD




FABRIC GRAY





**FLAT
PANEL
8"x12'**

SILVER

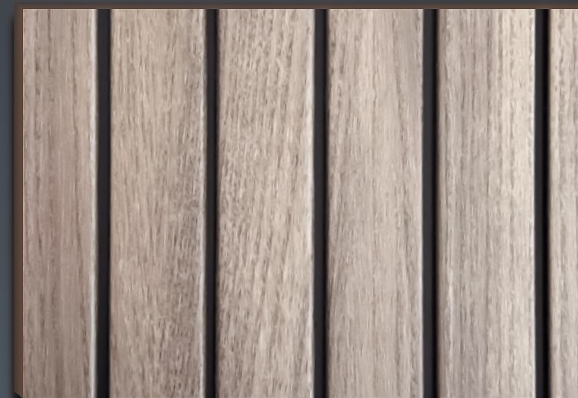


BROWN





**SLAT
PANEL
6"x12'**

**GRAY
ROSE**



**LIGHT
APRICOT**



EBONY




**BLACK
GOLD**



SHARPLY WALNUT



TECHNIC WOOD




NATURAL WOOD



BAMBOO




WHITE OAK






**ACOUSTIC
PANELS
2'X2'**

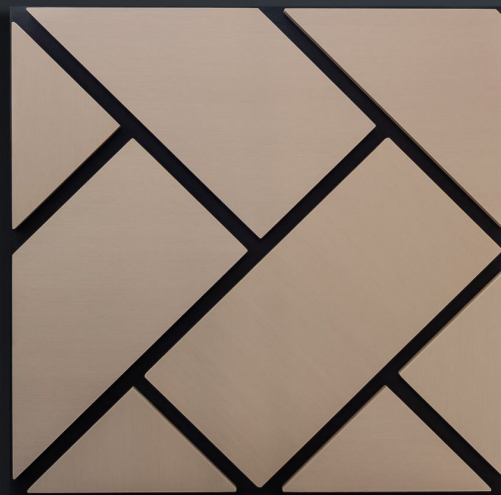


BEIGE



SLATTED

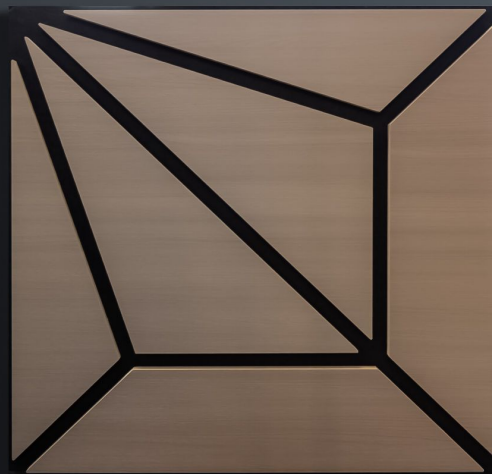

DIAMOND SHAPE

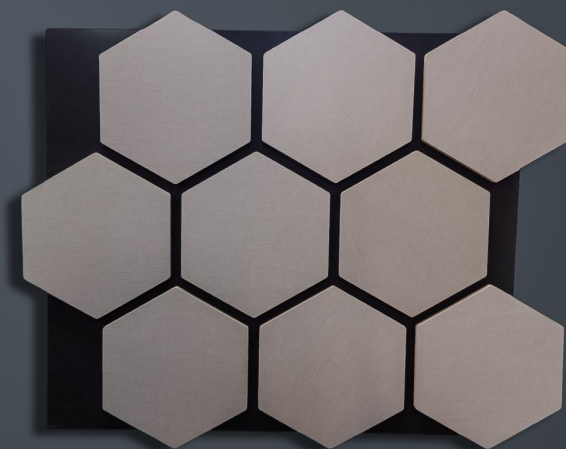


FABRIC GRAY



FAUX STONES

LIGHT GRAY 2'X4'

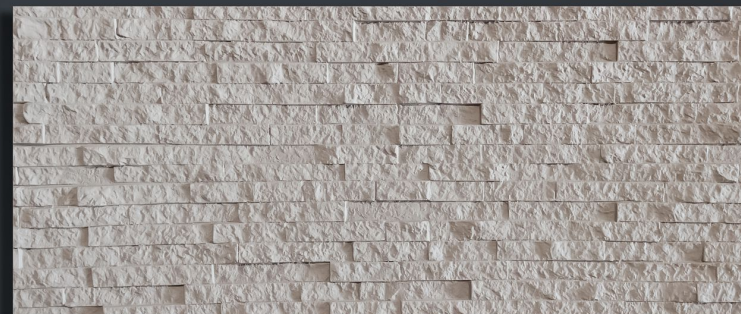


DARK GRAY L3-7 2'X4'



DARK GRAY S3-1



DARK GRAY 2'X4' WTSS-14

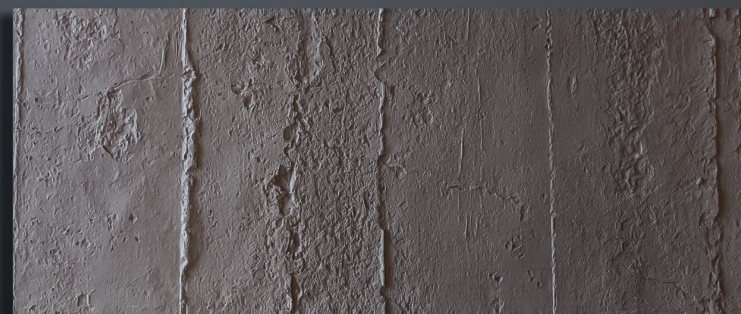




WALL PANELS 4'X10'


AMBER PINE #1



AMBER PINE #2

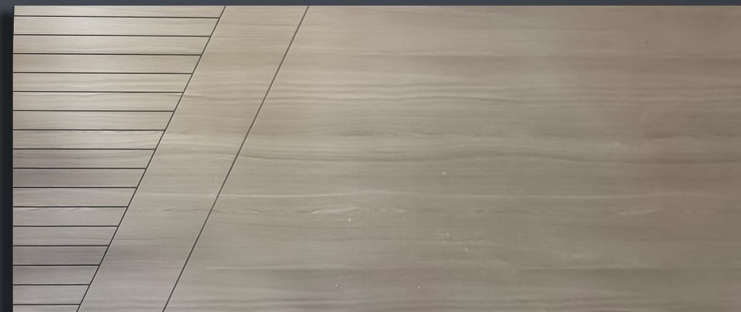

AMBER PINE #3

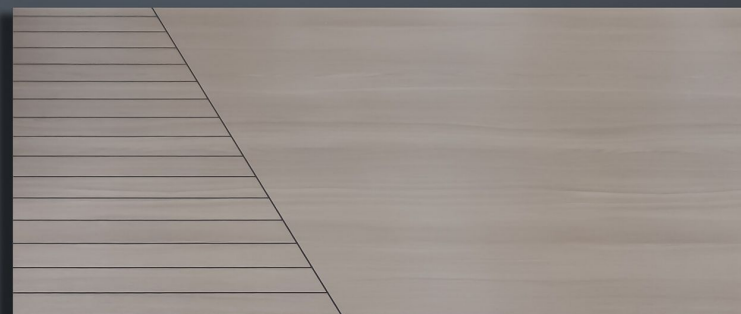

AMBER PINE #4






**WALL
PANELS
4'X10'**

CARVED WOOD #1



CARVED WOOD #2

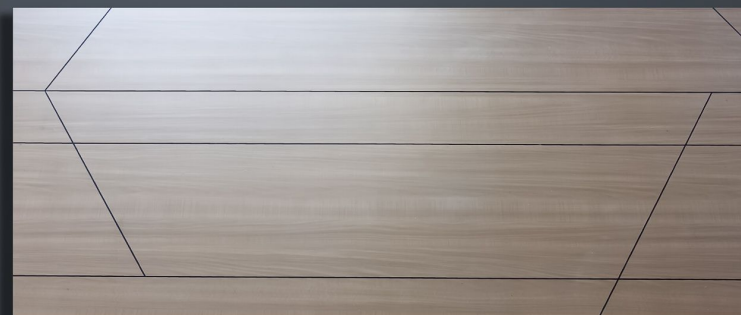


CARVED ROASTED BAMBOO






**SLAT
PANEL
6"x12'**


BLACK MATTE




MAPLE




ESPRESSO



BUSS BIRCH



CLASSIC BIRCH





**SLATTED
PANEL
5"x12'**



F19-830R



F19-826



F19-828R



F22-848



F22-846



F22-849




F02-2061D




TRIMS

FRAME



1.5"x12' - TJ09-4

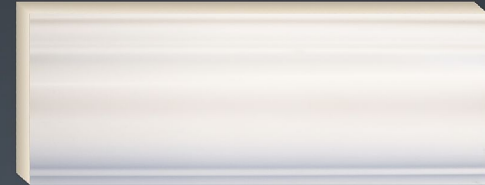


2.5"x12' - TJ09A-6

BASEBOARD



3.5"x12' - TJ53-15

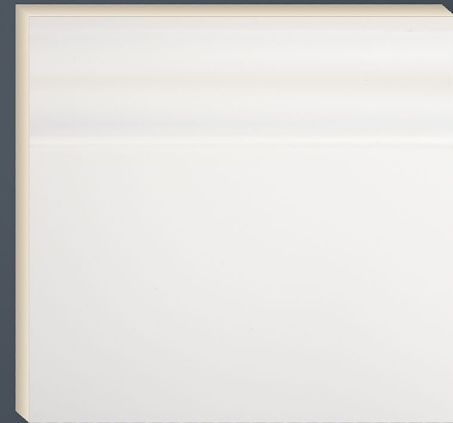


6"x12' - TJ05-10





ACCESSORIES

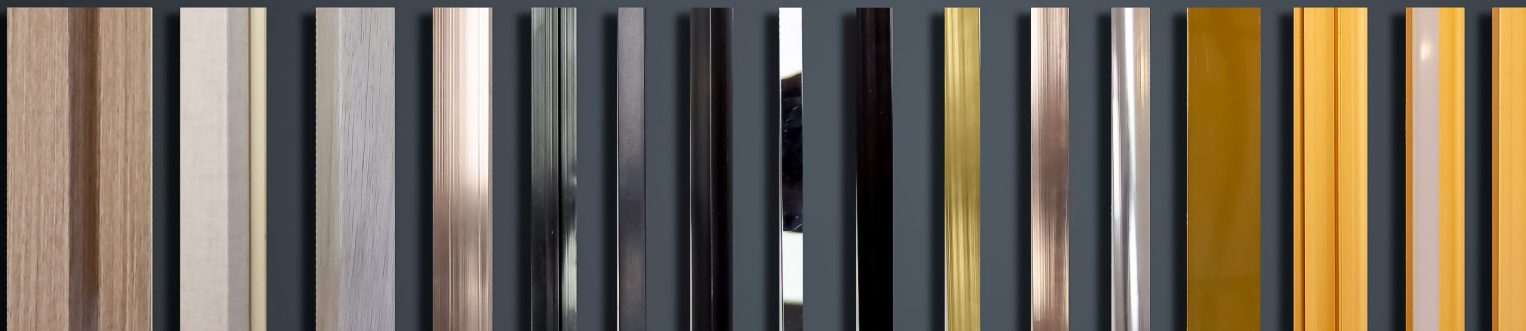



COB LED STRIP LIGHT



CCT

CCT
(2700K-6500K)



RF
Controller

12/24V

No Voltage
Drop






Flexible



Energy
Efficient



Linear
Light Strip

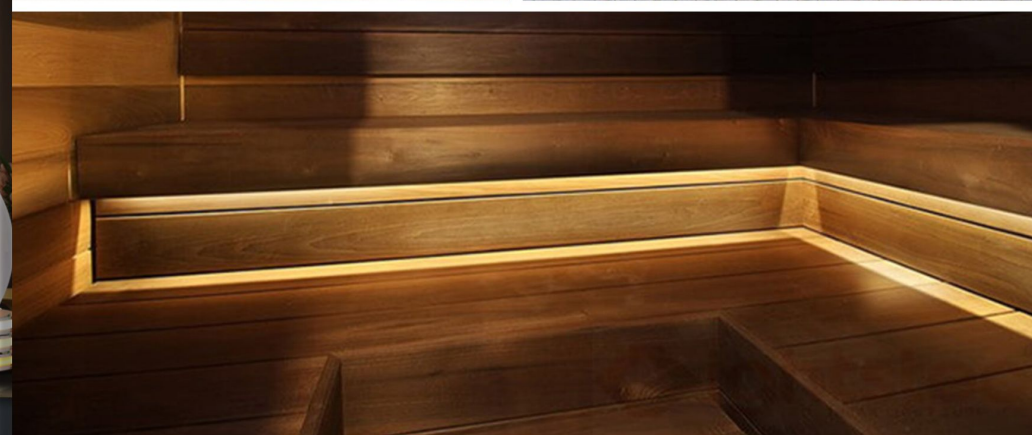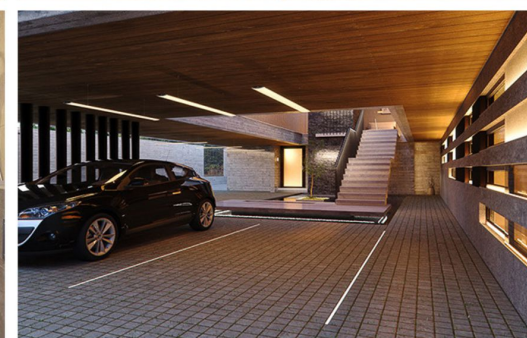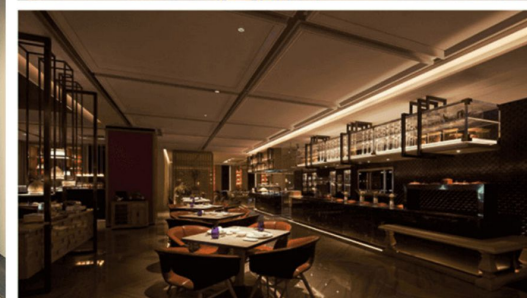



LEDS



COB LED STRIP LIGHT
COB CCT KIT
COB SINGLE COLOR KIT
COB WATER RUNNING LED STRIP KIT


**READY TO
SHOP
INVENTORY**



- ✔ Quality
- ✔ Easy to Install
- ✔ Many Options



COB LED STRIP LIGHT

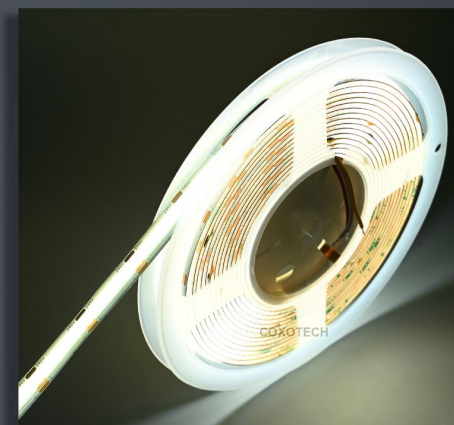

3000K - 4000K - 6500K - CCT



LEDS



	Safe to use Low voltage application (DC 12V/ 24V) No danger to body when it's working.
Smooth & soft light With very balance & soft lighting, Very suitable for indoor lighting.	
	Bendable It's more bendable than any other SMD LED strip. Easy to make any shape.

COB LED STRIP LIGHT
COB CCT KIT
COB SINGLE COLOR KIT
COB WATER RUNNING LED STRIP KIT

READY TO
SHOP
INVENTORY



- ☑ Quality
- ☑ Easy to Install
- ☑ Many Options



SILICONE SEALANT



SILIC- ONE SEALANT

100% RTV



Sealant is an acid-curing, one-component silicone sealant for a range of general sealing and glazing applications. It provides a strong adhesion and suitable for use on common non-porous building materials.

Properties: Stays permanently elastic after curing, Resistant to temperature extremes, Resistance to aging, cracking and discoloring, Remains flexible in low and high temperatures.

Applications: Sealing around windows and doors, sealing in DIY applications, on bathroom, kitchen and plumbing applications, connection and expansion joints on glass, porcelain, quartz, marble, granite, steel etc. Sealing electric, telephone etc. Sockets and switches.

Instructions: Cleaning the surfaces with a solvent will definitely improve the adhesion. The application temperature must be between 40-105°F. After the application, the sealant must be tooled with light pressure within 5 minutes to spread the material against the joint surfaces and to obtain a professional finish. Excess uncured sealant may be cleaned with solvent. Cured sealant can be removed barely mechanically.

Shelf Life: Written top of the cartridge.

Sealant es sellador de silicona monocomponente de curado ácido, recomendado para una amplia gama de sellados en general y aplicaciones de acristalamiento. Proporciona una fuerte adhesión en los materiales no porosos de uso común en la construcción.

Propiedades: Mantiene su elasticidad permanente después del curado.

Antibacteriano. Resistente al envejecimiento, no se agrieta ni decolora.

Olor acético típico durante el curado.

Aplicaciones: Sellado alrededor de ventanas y puertas para el aislamiento y relleno de huecos. Sellado en aplicaciones de baño, cocina y fontanería. Juntas de conexión y expansión en vidrio, porcelana, cuarzo, mármol, granito, acero, etc.

Instrucciones: Limpiando las superficies con un solvente antemano mejorará la adherencia. La temperatura de aplicación debe estar entre 40-105 F (4-40°C). Después de la aplicación, usando espátula u hoja de utilidad, el sellador debe ser apretado con una ligera presión dentro de 5 minutos para extender el material sobre las superficies de la junta y obtener un resultado profesional. El exceso de sellador sin curar se puede limpiar con solvente. El sellador curado se puede eliminar a mano con navaja o cuchillo.

Restricciones: A causa de su curado ácido, no se debe utilizar en espejos y metales sensibles como el cobre, bronce, plomo. No se puede pintar. No es adecuado para acuarios. Si se expone a la luz solar directa, el sellador puede amarillear debido a la propiedad antibacteriana. El sellador necesita humedad para el curado por lo tanto, no debe aplicarse en lugares sin ventilación.

Vida Útil: Indicado en la caja.

**ADVANCED 100% RTV
SILICONE SEALANT**
• 100% WATERPROOF
• WEATHER RESISTANT
• STAYS FLEXIBLE
• SHRINK & CRACK PROOF
• STRONG ADHESION



MADE IN TURKIYE

10.1 FL. OZ. (300ML)





RHINO GRIP



RHINO GRIP



Rhino Grip is a high-quality, hybrid polymer technology-based, one-component, elastic adhesive with high adhesion strength. Features: High initial grab. Waterproof. Very good adhesion strength. Stays elastic after curing.

Overpaintable. No inflammation. Excellent resistance to water, freeze, and severe temperature conditions.

Eco-friendly, does not contain solvent, silicone, or isocyanate

Applications: Bonding applications for many surfaces such as stone, concrete, mirrors, glass, wood, plasterboard, PVC, hard plastics, ceramic, metals, alloys, steel, etc.

Bonding in car and container industries.

Shelf life is on the cartridge.

Safety: H317 - May cause an allergic skin reaction. P102 - Keep out of reach of children. P261 - Avoid breathing dust/fume/gas/mist/vapours/spray. P272 - Contaminated work clothing should not be allowed out of the workplace.

P280 - Wear protective gloves/protective clothing/eye protection/face protection. P302+P352 - IF ON SKIN: Wash with soap and water. P333+P313 - If skin irritation or a rash occurs: Get medical advice/attention. Dispose of contents/container to a special waste collection point, in accordance with local and/or international regulations.

HIGH INITIAL TACK
REMAINS ELASTIC
SUPERIOR ADHESIVE STRENGTH



MADE IN TURKIYE

9.8FL OZ. (290ML)





ACRYLIC



SILICONIZED ACRYLIC LATEX CAULK



Siliconized Acrylic is one-component general purpose acrylic-dispersion based sealant reinforced with silicone emulsion. It has superior adhesion and good elasticity. Properties: Permanently elastic after cure. Can be used on all porous surfaces such as brick, concrete, wood etc. Very easy to apply and clean. Water-proof after curing. Solvent-free. Overpaintable. No odour. Applications:

Sealing of low and medium movement joints between various construction materials (wood, concrete, brick etc.). Sealing joints between windows, walls, doors etc. Filling cracks in walls and on ceilings. Storage: In its original unopened package at room temperature. Instructions: The joints must be clean and free from dust, grease and rust. No primer is required for non-porous surfaces. On porous surfaces such as concrete, stone, cement and plaster a primer (mixture of one part acrylic sealant and 4-5 parts of water) can be applied. Application temperature is between 40-105°F. Keep the sealed joint dry at least for two hours. Cured sealant can be removed mechanically. Shelf Life:

See top of the package. Restrictions: Should not be used for sealing joints permanently exposed to water. It should not be applied in case of risk of rain or frost. Safety: P102-Keep out of reach of children.

Sellador monocomponente de base acrílica reforzado con emulsión de silicona. Cuenta con una adhesión superior y mejor elasticidad que los sellantes acrílicos tradicionales.

Propiedades: Se puede usar en todas las superficies porosas tales como ladrillo, madera hormigón, etc. Muy fácil de aplicar y limpiar. Impermeable después del curado. Se puede pintar.

No tiene olor. Aplicaciones: Sellado de juntas de bajo y medio movimiento entre los distintos materiales de construcción (madera, hormigón, ladrillo etc.). Sellado de juntas entre ventanas, paredes, puertas etc. Relleno de grietas en paredes y techos. Instrucciones: En superficies porosas como hormigón, piedra, cemento y yeso se puede aplicar una imprimación (mezcla de una parte de sellador acrílico y 4-5 partes de agua). La temperatura de aplicación debería estar entre 40-105°F. Mantenga seca la junta sellada al menos durante dos horas. Sellador ya curado se puede eliminar a mano. Almacenaje: En el embalaje original sin abrir y a temperatura ambiente. Restricciones: No debe ser utilizado para el sellado de juntas expuestas al agua de forma permanente. No se debe aplicar en caso de riesgo de lluvias o heladas. Caducidad: Indicada en la top del envase. Seguridad:

P102- Mantener fuera del alcance de los niños.

• NO ODOUR
• PAINTABLE
• WEATHERPROOF
AFTER CURING



MADE IN TURKIYE
10.5 FL. OZ.(310ML)



+1 (407) 717 6686



sales@i9phoenix.com
www.phoeniximprovement.com



7906 Kingspointe Pkwy,
suite 103, Orlando, FL 32819



PHOENIX

HOME IMPROVEMENTS