

Gate i37 Grey

9562516



The Gate i37 is a robust, transparent gate specifically designed for harsh environments.

The design combines the advantages of an unobstructed customer contact at the checkout with an outstanding label detection performance.

All Nedap i-Line EAS Gates are equipped with state-of-the-art electronics that gather valuable information and offer integration possibilities with other security devices.

Benefits


- Equipped with Nedap's patented OID (Orientation Independent Detection) technology; tags are detected regardless of their position (front/flat/ side/angled)
- Crash resistant against a fully packed trolley
- 100% transparent design that prevents climbing
- Audio and visual alarm signalisation
- Integration possibility with other (3rd party) security devices via open API
- Real-time insight and control within-store and organisation-wide dashboards
- Remote service
- Equipped with integrated advertisement panels to place posters on both sides of the gate

Options

- Protection poles
- Scratch protector
- Closed Shielding
- Real-time in store security dashboard
- Organisation-wide Analytics dashboard via web or app
- Open API (Application Programming Interface)

Technical specifications – General

EAS Frequency	8.2MHz
Connectivity	Ethernet, usb (service port only)
Management interfaces	<ul style="list-style-type: none">• Local configuration interface• Nedap Device Management with:<ul style="list-style-type: none">• Remote monitoring• Remote log-in• Online firmware updates• SNMP version 2C
Dimensions	1500mm x 370mm x 40mm 4.92ft x 1.21ft x 1.57”
Weight	10.6 kg 23.37 lbs
Mains	100 - 240V
Operating temp.	32 .. 113°F 0 .. 40°C
Mounting	Floor mounted
Power consumption	Average of 12W per antenna

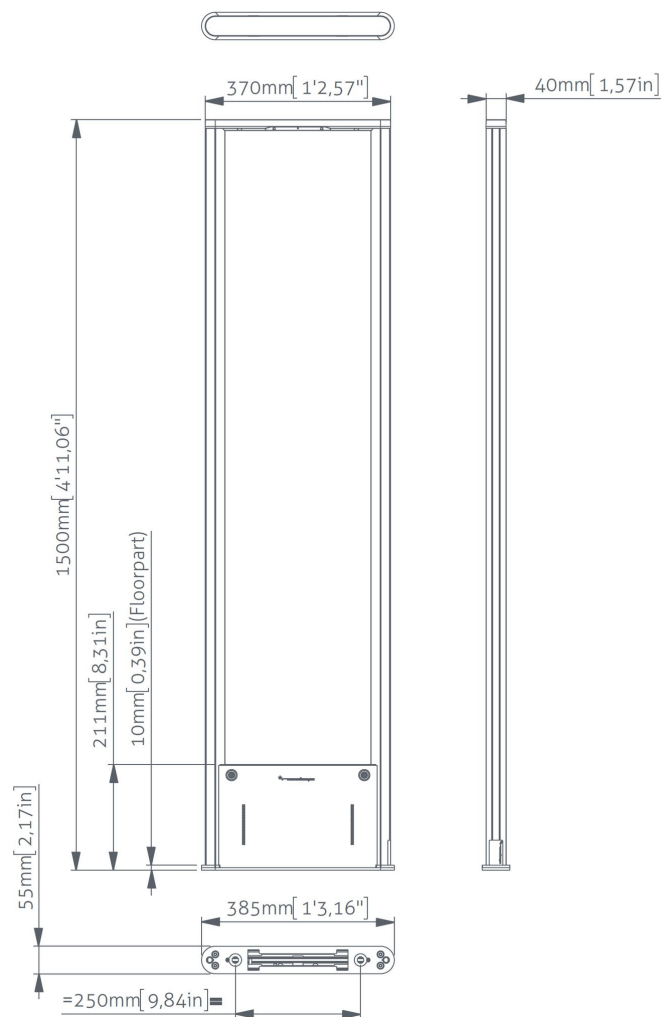

Ordering Information

Description	Article number
ASSY I37R RF	9562516

Package includes

- Gate i37 (including electronics)
- Installation set