




# Product Specification


**P2.5 Outdoor**

## Product Picture of P2.5 Outdoor

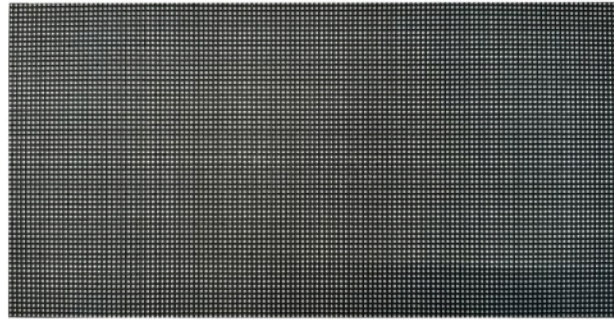



Note: The picture is for reference only, the specific object shall prevail.

## Hole Position of P2.5 Outdoor

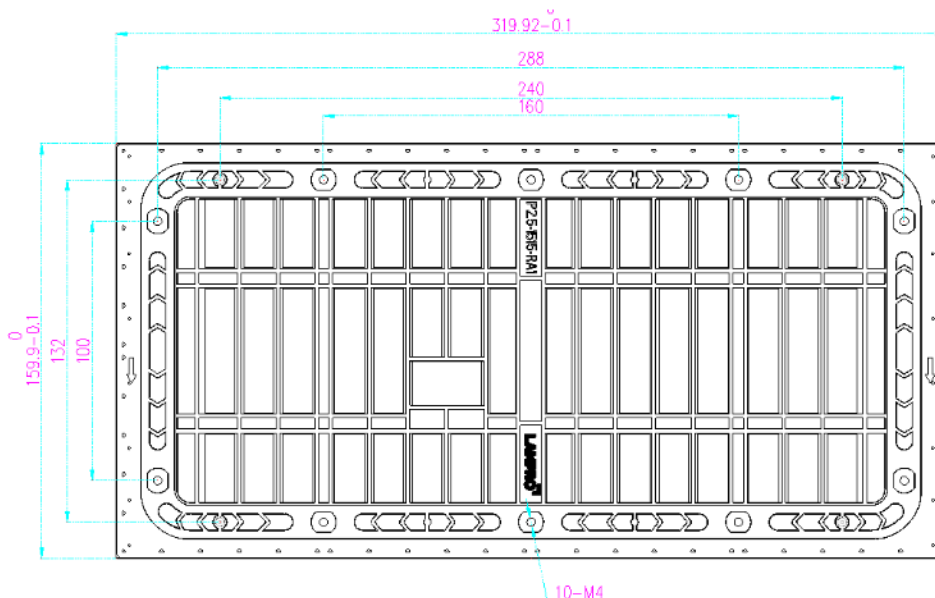

Note: Drawings are for reference only.

## Wiring Diagram of Data and Power

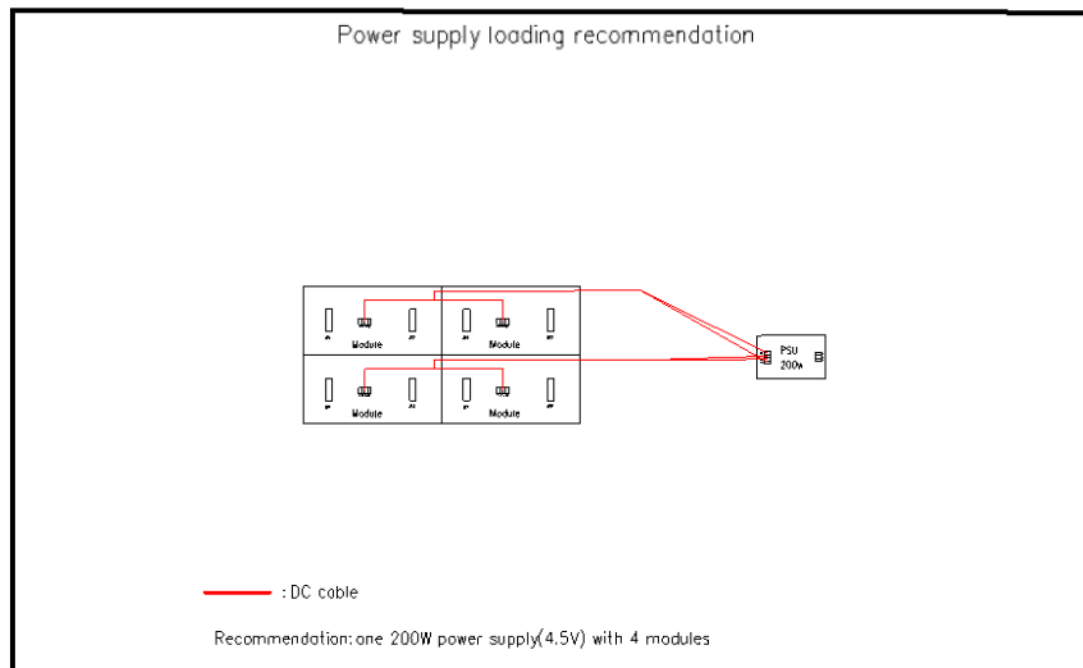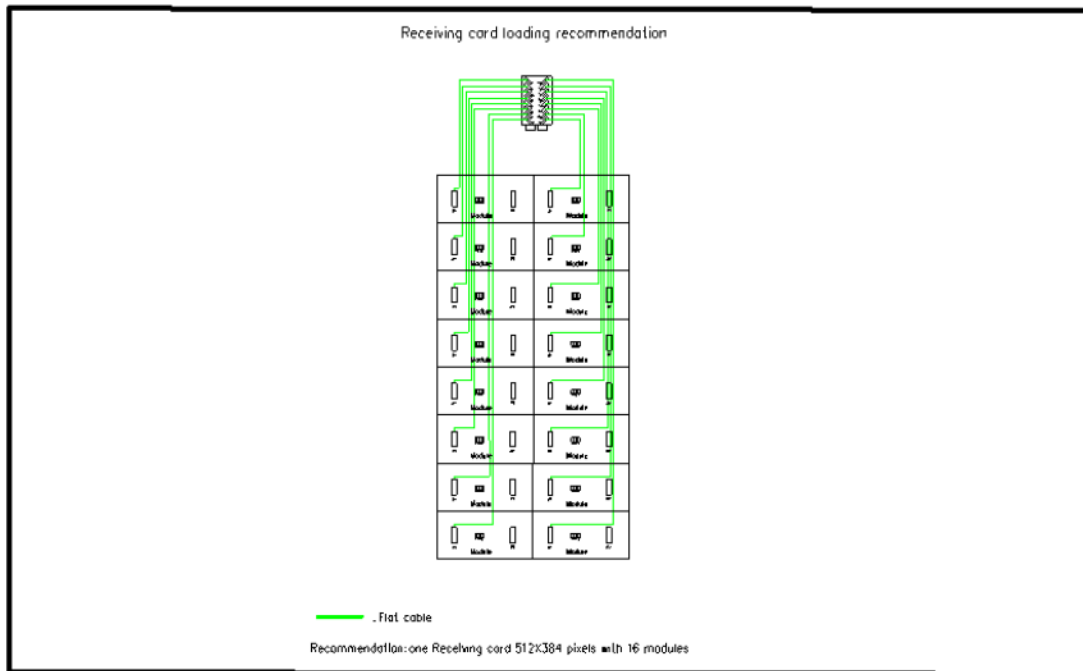

**Remark:**

1. The recommended diagrams are for reference only.
2. The recommended cabinet size is 960X960 mm.

## Parameter of P2.5 Outdoor

	Parameter Name	Product Parameter
<b>Module</b>	LED Type	SMD1515
	Pixel Pitch	2.5mm
	Module Resolution (W×H)	128X64=8192 Pixels
	HUB	HUB75
	Module Dimension( W×H×D)	320mm×160mm×17.5mm
	Module Weight	0.46±0.02kg
<b>Optical</b>	Single-dot Brightness Calibration	Support
	White Balance Brightness	4000 ~4500 CD/m <sup>2</sup>
	Standard Color Temperature	6500K (1000K ~ 9500K Adjustable )
	Beam Angle (Hor/Ver°)	140°/140°
	Contrast Ratio	5000 : 1
<b>Electronic</b>	Input Power <Max>	879W/m <sup>2</sup>
	Input Power <Typical>	293W/m <sup>2</sup>
	Power Supply Input Voltage	AC90 ~ 132V/ AC186 ~ 264V, Frequency 47~63 (Hz)
<b>Performance</b>	Frame Changing Frequency	60Hz
	Refresh Rate	3840Hz
	Processing Depth	12~14 Bit
	Video Support	2K HD, 4K UHD
<b>Environment</b>	Life Typical Value (HRS)	100000H
	Working Temperature/ Humidity Range (°C/RH)	-20°C~50°C / 10%~80%RH (No Condensation)
	Storage Temperature / Humidity Range (°C/RH)	-20°C~55°C / 10%~85%RH (No Condensation)

- Remark:**
1. The above parameters are typical or recommended.
  2. Product parameters or configuration adjustments without notice.
  3. Customized products, please confirm the parameters with our company.