

P2 Flexible Indoor



DIY As You Want

Product features:

- Scientific Design, Extremely Thin:**
 Thickness **7.6mm**, weight **<0.3kg**.
- High-quality Rubber Bottom Shell**
 Highly flexible, **up to 120° bending angle**.
- Standard 18 pcs Improved Magnet sheets**
 The magnet can be rotated to adjust the height angle, magnetic force is increased **by 80%**.
- Customize the shape you want**
 Cylindrical screen, Circular screen, Streamer screen, Creative Screen.
- Good Compatibility**
 Replace the indoor **P1.2~P3.07** module with the same series.
- Support for coating process***



Diameter: 612mm

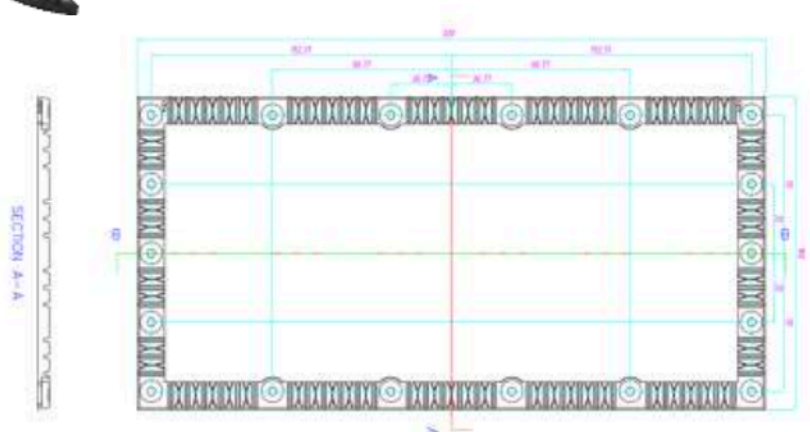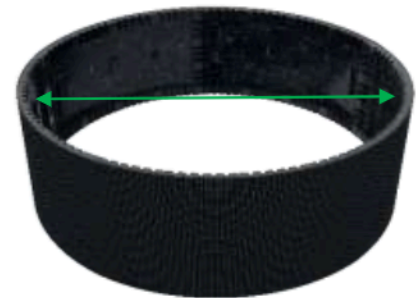

Note: Drawings are for reference only.

SPECIFICATION PARAMETERS:

	Parameter	Value
Module	Pixel Pitch	2mm
	LED Type	SMD1515
	Module Resolution (W×H)	160X80=12800 Pixels
	Pixel density (pixels/sq.m.)	250000 dot/m ²
	Module Size (WxHxD)	W320mmxH160mmxD7.6mm
	Module Weight	0.27±0.01kg
	HUB	HUB75
	Number of Component Cylindrical Modules	6 PCS
	Minimal Cylindrical Diameter	612mm
	Optical	Single-dot Brightness Calibration
Brightness		450~500 cd/m ²
Color Temperature		2000K ~ 9300K Adjustable
Beam Angle (Hor/Ver°)		140°/140°
Brightness/Color Uniformity		≥98%
Contrast Ratio		5000:1
Electroni	Input Power <Max>	293W/m ²
	Input Power <Typical>	89 W/m ²
	Power Supply Input Voltage	AC90 ~ 132V/ AC186 ~ 264V, Frequency 47-63 (Hz)
Performance	Frame Changing Frequency	60Hz
	Refresh Rate	3840Hz
	Processing Depth	12~14Bit
	Video Support	2K、 4K
Environm	Life Span (hrs)	100000hrs
	Working Temp/Humidity (°C/RH)	-20°C~45°C / 10%~50%RH (No Condensation)
	Storage Temp/Humidity (°C/RH)	-20°C~50°C / 10%~60%RH (No Condensation)
	Certification	CE/CB/ROHS/EAC

Note:

- Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.
- The specification parameters are reference values. Part of the data comes from Unilumin' s internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.
- Different configurations can achieve different refresh rates.